5.18 Study Area 18 – Highland Park

These findings apply to ALCOSAN Points of Connection A-36 through A-42, which include combined sewer systems in the City of Pittsburgh and separate sewer systems in the Municipality of Penn Hills.

Highland Park - BMP GIS Features

The SUSTAIN BMP siting tool analysis resulted in identification of a total of 31,689 BMP GIS Features covering 2,088 acres, which consisted of the following:

Table 5.18-1 - TOTAL SUSTAIN BMP Features Output

SUSTAIN BMP Feature Type	Number of Features	Area of BMP Features (Acres)
Permeable Pavement	10,309	510
Bioretention	8,400	617
Infiltration Basin/Trenches	2,079	287
Vegetated Filter Strips	3,065	311
Grass Swales	7,581	355
Constructed Wetlands	255	8

Locations of all identified BMP GIS features are presented on the SUSTAIN BMP Features Figure.

Highland Park - Concept Municipal GSI Projects

Based on the BMP features, 1,830 concept Municipal GSI Projects were identified covering 214 total acres with a corresponding drainage area delineation of 1,006 total acres and consisted of the following:

Table 5.18-2 - Summary of Identified Concept Municipal GSI Projects

Concept GSI Technology	Number of Projects	GSI Project Area (Acres)	Project Drainage Area (Acres)
Permeable Pavement	420	166	780
Bioretention	1,342	45	221
Infiltration Basin/Trenches	44	2	3
Vegetated Filter Strips	20	1	1
Grass Swales	4	< 1	< 1
Constructed Wetlands	0	0	0

Project statistics including ALCOSAN POC, model subcatchment, BMP type, project area, area of project inside and outside of the public right-of-way, tributary drainage area, and tributary impervious drainage area are provided in the Concept Municipal Projects Table. Locations of all identified Concept Municipal GSI projects are presented in the Concept Municipal GSI Projects Figures (2) and the corresponding delineated tributary drainage areas are presented by BMP in the Individual Project Drainage Area Figures (10).

Highland Park - Concept Commercial/Institutional and Special Case GSI Projects

Based on the BMP features, 570 concept Commercial/Institutional and Special Case GSI Projects were identified covering 300 total acres and consisted of the following:

Table 5.18-3 - Summary of Identified Concept Commercial/Institutional and Special Case GSI Projects

Concept GSI Technology or Special Case Project Category	Number of Projects	GSI Project Area (Acres)
Commercial/Institutional Permeable Pavement	210	89
Commercial/Institutional Green Roofs	248	120
State Route Permeable Pavement	112	91
Busway Permeable Pavement	0	0
Busway Bioretention	0	0

Project statistics including ALCOSAN POC, model subcatchment, BMP type, project area, area of project taxable, exempt, provisionally exempt and in the public right-of-way are provided in Concept Commercial / Institutional GSI Projects Table. Locations of all identified Concept Commercial / Institutional GSI projects are presented in the Concept Commercial / Institutional GSI Projects Figures (2).

O Hara Township
Shaler Township
O Hara Township
Sharpsburg Borough
Municipality of Penn Hills
Etna Borough
Shaler Township
City of Pittsburgh
Millvale Borough
Churchill Borough
Wilkinsburg Borough
Forest Hills Borough
Edgewood Borough
Swissvale Borough

Permeable Pavement
Bioretention Basin
Infiltration Basin / Trench
Vegetated Filter Strips
Grass Swales
Constructed Wetlands
Combined Sewer Subcatchment
Municipal Boundaries

0 500 1,000 2,000 3,000 4,000
1 Inch = 1,000 Feet

ALCOSAN GSI Project
A-36 through A-42
SUSTAIN BMP Features

Highland Park Concept Municipal Projects

June 4, 2014

Revised October 7, 2014

*Note: The drainage area presented in this table is representative of the individual drainage area tributary to each concept municipal project without any revisions to account for overlap, without engineering judgment revisions applied, and without the drainage areas being clipped to their corresponding model subcatchments.

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-37Z-00	INT_A37A_C1	HIPK_1	PP	0.140	0.140	0.000	0.182	0.155
A-37Z-00	INT_A37A_C1	HIPK_2	PP	0.252	0.252	0.000	0.666	0.345
A-37Z-00	INT_A37A_C1	HIPK_3	PP	0.247	0.247	0.000	0.619	0.358
A-37Z-00	INT_A37A_C1	HIPK_4	PP	0.393	0.393	0.000	2.985	1.100
A-37Z-00	INT_A37A_C1	HIPK_5	PP	0.156	0.156	0.000	0.332	0.159
A-37Z-00	INT_A37A_C1	HIPK_6	PP	0.145	0.130	0.015	0.668	0.279
A-40-00	A41IN_C1	HIPK_7	PP	0.292	0.292	0.000	1.127	0.578
A-41-00	HR001_C3	HIPK_8	PP	0.115	0.115	0.000	0.211	0.112
A-41-00	A41IN_C1	HIPK_9	PP	0.070	0.070	0.000	0.103	0.075
A-41-00	HR002_C1	HIPK_10	PP	1.886	1.886	0.000	8.575	4.116
A-41-00	HR002_C1	HIPK_11	PP	2.843	2.843	0.000	17.484	8.280
A-41-00	HR002_C1	HIPK_12	PP	0.754	0.754	0.000	1.668	0.994
A-41-00	HR002_C1	HIPK_13	PP	0.568	0.568	0.000	7.697	2.805
A-41-00	HR002_C1	HIPK_14	PP	0.644	0.644	0.000	10.196	3.649
A-41-00	HR002_C1	HIPK_15	PP	1.490	1.490	0.000	7.538	3.680
A-41-00	HR002_C1	HIPK_16	PP	0.434	0.434	0.000	2.335	1.059
A-41-00	HR002_C1	HIPK_17	PP	1.300	1.300	0.000	10.106	4.079
A-41-00	HR002_C1	HIPK_18	PP	0.276	0.276	0.000	1.127	0.473
A-41-00	HR002_C1	HIPK_19	PP	0.177	0.177	0.000	1.859	0.500
A-41-00	HR002_C1	HIPK_20	PP	0.184	0.184	0.000	0.588	0.241
A-41-00	HR002_C1	HIPK_21	PP	0.174	0.174	0.000	0.376	0.186
A-41-00	HR002_C1	HIPK_22	PP	0.248	0.248	0.000	1.210	0.479
A-41-00	HR002_C1	HIPK_23	PP	0.295	0.295	0.000	1.261	0.610
A-41-00	HR002_C1	HIPK_24	PP	0.193	0.193	0.000	0.307	0.197
A-41-00	HR002_C1	HIPK_25	PP	0.372	0.372	0.000	1.529	0.712
A-41-00	HR002_C1	HIPK_26	PP	0.222	0.222	0.000	0.732	0.323
A-41-00	HR002_C1	HIPK_27	PP	0.522	0.522	0.000	1.220	0.665
A-41-00	HR002_C1	HIPK_28	PP	2.035	2.035	0.000	11.248	5.670

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_29	PP	1.002	1.002	0.000	5.248	2.373
A-41-00	HR002_C1	HIPK_30	PP	0.636	0.636	0.000	3.530	1.069
A-41-00	HR002_C1	HIPK_31	PP	0.651	0.651	0.000	2.592	1.032
A-41-00	HR001_C3	HIPK_32	PP	0.413	0.358	0.055	1.551	0.671
A-41-00	HR001_C3	HIPK_33	PP	0.355	0.301	0.054	1.046	0.457
A-41-00	HR001_C2	HIPK_34	PP	1.444	1.377	0.067	7.861	4.252
A-41-00	A41IN_C1	HIPK_35	PP	0.231	0.231	0.000	0.589	0.359
A-41-00	A41IN_C1	HIPK_36	PP	0.490	0.489	0.001	1.998	0.970
A-41-00	A41IN_C1	HIPK_37	PP	0.529	0.529	0.000	2.495	1.218
A-41-00	HR002_C1	HIPK_38	PP	0.125	0.125	0.000	0.328	0.205
A-41-00	HR002_C1	HIPK_39	PP	0.105	0.105	0.000	0.202	0.133
A-41-00	HR002_C1	HIPK_40	PP	0.211	0.211	0.000	1.028	0.433
A-41-00	HR002_C1	HIPK_41	PP	0.138	0.138	0.000	0.207	0.149
A-41-00	HR002_C1	HIPK_42	PP	0.066	0.066	0.000	0.103	0.073
A-41-00	HR001_C3	HIPK_43	PP	0.222	0.222	0.000	1.154	0.434
A-41-00	HR001_C3	HIPK_44	PP	0.165	0.165	0.000	0.433	0.193
A-41-00	HR002_C1	HIPK_45	PP	0.307	0.307	0.000	1.087	0.626
A-41-00	HR002_C1	HIPK_46	PP	0.288	0.288	0.000	1.258	0.599
A-41-00	HR002_C1	HIPK_47	PP	0.146	0.146	0.000	0.635	0.287
A-41-00	HR002_C1	HIPK_48	PP	0.058	0.058	0.000	0.110	0.064
A-41-00	HR002_C1	HIPK_49	PP	0.279	0.273	0.006	1.130	0.501
A-41-00	HR002_C1	HIPK_50	PP	0.169	0.163	0.006	0.665	0.268
A-41-00	HR001_C2	HIPK_51	PP	0.169	0.169	0.000	0.914	0.485
A-41-00	HR001_C2	HIPK_52	PP	0.146	0.146	0.000	1.114	0.380
A-41-00	HR001_C2	HIPK_53	PP	0.200	0.199	0.001	0.657	0.282
A-41-00	A41IN_C1	HIPK_54	PP	0.297	0.297	0.000	2.034	1.029
A-41-00	HR001_C2	HIPK_55	PP	0.179	0.179	0.000	0.862	0.682
A-41-00	HR001_C2	HIPK_56	PP	0.114	0.111	0.003	0.524	0.512
A-41-00	A41IN_C1	HIPK_57	PP	0.255	0.254	0.001	0.712	0.340
A-41-00	HR002_C1	HIPK_58	PP	0.179	0.179	0.000	0.395	0.305
A-41-00	HR002_C1	HIPK_59	PP	0.237	0.237	0.000	1.795	0.538
A-41-00	HR002_C1	HIPK_60	PP	0.242	0.242	0.000	2.924	1.123
A-41-00	HR002_C1	HIPK_61	PP	0.145	0.145	0.000	0.869	0.527
A-41-00	HR002_C1	HIPK_62	PP	0.391	0.385	0.006	2.299	0.986

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_63	PP	0.217	0.217	0.000	1.586	0.745
A-41-00	HR002_C1	HIPK_64	PP	0.106	0.106	0.000	0.252	0.109
A-41-00	HR002_C1	HIPK_65	PP	0.102	0.102	0.000	0.379	0.159
A-41-00	HR002_C1	HIPK_66	PP	0.194	0.194	0.000	0.952	0.338
A-41-00	HR002_C1	HIPK_67	PP	0.111	0.111	0.000	0.194	0.133
A-41-00	HR002_C1	HIPK_68	PP	0.485	0.485	0.000	2.633	0.876
A-41-00	HR002_C1	HIPK_69	PP	0.083	0.083	0.000	0.423	0.151
A-41-00	HR002_C1	HIPK_70	PP	0.094	0.088	0.006	0.496	0.419
A-41-00	HR002_C1	HIPK_71	PP	0.099	0.099	0.000	0.328	0.127
A-41-00	HR002_C1	HIPK_72	PP	1.633	1.633	0.000	9.032	3.346
A-41-00	HR002_C1	HIPK_73	PP	0.798	0.798	0.000	5.492	2.467
A-41-00	HR002_C1	HIPK_74	PP	2.278	2.278	0.000	10.570	5.364
A-41-00	HR002_C1	HIPK_75	PP	2.233	2.233	0.000	10.431	5.303
A-41-00	HR002_C1	HIPK_76	PP	0.831	0.831	0.000	3.151	1.495
A-41-00	HR002_C1	HIPK_77	PP	1.512	1.512	0.000	8.871	4.241
A-41-00	HR002_C1	HIPK_78	PP	0.933	0.857	0.076	3.178	1.682
A-41-00	HR001_C2	HIPK_79	PP	1.427	1.423	0.004	5.547	3.144
A-41-00	A41IN_C1	HIPK_80	PP	0.408	0.408	0.000	1.972	1.063
A-41-00	HR002_C1	HIPK_81	PP	1.519	1.519	0.000	6.987	3.078
A-41-00	HR002_C1	HIPK_82	PP	1.799	1.799	0.000	10.334	5.154
A-41-00	HR002_C1	HIPK_83	PP	2.123	2.123	0.000	14.534	7.037
A-41-00	HR002_C1	HIPK_84	PP	0.062	0.062	0.000	0.128	0.049
A-42-00	PennHills_A-42	HIPK_85	PP	0.084	0.084	0.000	0.091	0.080
A-42-00	PennHills_A-42	HIPK_86	PP	0.251	0.247	0.004	0.404	0.281
A-42-00	PennHills_A-42	HIPK_87	PP	0.328	0.306	0.022	0.456	0.291
A-42-00	PennHills_A-42	HIPK_88	PP	0.080	0.009	0.071	0.146	0.071
A-42-00	PennHills_A-42	HIPK_89	PP	0.244	0.243	0.001	0.542	0.274
A-42-00	PennHills_A-42	HIPK_90	PP	0.521	0.521	0.000	1.258	0.596
A-42-00	PennHills_A-42	HIPK_91	PP	0.597	0.597	0.000	2.788	0.951
A-42-00	PennHills_A-42	HIPK_92	PP	0.101	0.101	0.000	0.116	0.094
A-42-00	INT_A42_C1	HIPK_93	PP	0.449	0.437	0.012	0.572	0.456
A-42-00	A4200__-POC-L-01_C1	HIPK_94	PP	0.880	0.873	0.007	1.752	0.913
A-42-00	A4200__-POC-L-01_C1	HIPK_95	PP	0.206	0.205	0.001	0.249	0.185
A-42-00	A4200__-POC-L-01_C1	HIPK_96	PP	0.384	0.383	0.001	1.185	0.458

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-02_C8	HIPK_97	PP	0.267	0.267	0.000	0.584	0.347
A-42-00	A4200__-POC-L-02_C8	HIPK_98	PP	0.316	0.316	0.000	0.717	0.378
A-42-00	A4200__-POC-L-02_C8	HIPK_99	PP	0.044	0.044	0.000	0.114	0.051
A-42-00	A4200__-POC-L-02_C8	HIPK_100	PP	0.703	0.703	0.000	1.893	0.986
A-42-00	A4200__-POC-L-02_C8	HIPK_101	PP	0.663	0.663	0.000	2.722	1.036
A-42-00	A4200__-POC-L-02_C8	HIPK_102	PP	1.862	1.852	0.010	8.961	2.494
A-42-00	A4200__-POC-L-02_C8	HIPK_103	PP	0.339	0.339	0.000	0.887	0.409
A-42-00	A4200__-POC-L-01_C2	HIPK_104	PP	0.187	0.187	0.000	0.722	0.342
A-42-00	A4200__-POC-L-01_C2	HIPK_105	PP	0.240	0.240	0.000	0.472	0.281
A-42-00	A4200__-POC-L-01_C2	HIPK_106	PP	0.287	0.287	0.000	1.074	0.533
A-42-00	A4200__-POC-L-01_C2	HIPK_107	PP	0.242	0.242	0.000	0.561	0.324
A-42-00	A4200__-POC-L-01_C2	HIPK_108	PP	0.174	0.174	0.000	0.380	0.208
A-42-00	A4200__-POC-L-01_C2	HIPK_109	PP	0.435	0.435	0.000	2.009	0.815
A-42-00	A4200__-POC-L-01_C2	HIPK_110	PP	0.349	0.349	0.000	1.052	0.645
A-42-00	A4200__-POC-L-01_C2	HIPK_111	PP	0.337	0.337	0.000	1.037	0.515
A-42-00	A4200__-POC-L-01_C2	HIPK_112	PP	0.562	0.550	0.012	1.468	0.786
A-42-00	A4200__-POC-L-01_C2	HIPK_113	PP	0.215	0.215	0.000	0.703	0.405
A-42-00	A4200__-POC-L-01_C2	HIPK_114	PP	0.300	0.300	0.000	0.903	0.589
A-42-00	A4200__-POC-L-01_C2	HIPK_115	PP	0.598	0.592	0.006	2.565	1.410
A-42-00	A4200__-POC-L-01_C2	HIPK_116	PP	0.869	0.862	0.007	2.726	1.332
A-42-00	A4200__-POC-L-02_C2	HIPK_117	PP	0.379	0.256	0.123	1.388	0.674
A-42-00	A4200__-POC-L-02_C2	HIPK_118	PP	0.226	0.212	0.014	0.323	0.267
A-42-00	A4200__-POC-L-02_C3	HIPK_119	PP	0.152	0.152	0.000	0.175	0.154
A-42-00	A4200__-MM_-L-04_C10	HIPK_120	PP	0.559	0.551	0.008	0.852	0.597
A-42-00	A4200__-MM_-L-04_C10	HIPK_121	PP	0.208	0.208	0.000	0.245	0.180
A-42-00	A4200__-MM_-L-04_C10	HIPK_122	PP	0.134	0.134	0.000	0.290	0.150
A-42-00	A4200__-MM_-L-04_C11	HIPK_123	PP	0.551	0.551	0.000	0.846	0.606
A-42-00	A4200__-MM_-L-04_C11	HIPK_124	PP	0.058	0.058	0.000	0.060	0.032
A-42-00	A4200__-POC-L-02_C4	HIPK_125	PP	0.161	0.161	0.000	0.325	0.186
A-42-00	A4200__-POC-L-02_C4	HIPK_126	PP	0.295	0.295	0.000	0.344	0.300
A-42-00	A4200__-POC-L-02_C4	HIPK_127	PP	0.384	0.380	0.004	2.112	0.794
A-42-00	A4200__-POC-L-02_C4	HIPK_128	PP	0.232	0.232	0.000	0.370	0.227
A-42-00	A4200__-POC-L-02_C4	HIPK_129	PP	0.284	0.284	0.000	4.054	1.153
A-42-00	A4200__-POC-L-02_C4	HIPK_130	PP	0.164	0.164	0.000	3.330	1.341

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-02_C4	HIPK_131	PP	0.167	0.167	0.000	0.637	0.268
A-42-00	A4200__-MM_-L-04_C4	HIPK_132	PP	0.743	0.743	0.000	10.239	2.380
A-42-00	A4200__-MM_-L-04_C4	HIPK_133	PP	0.381	0.381	0.000	3.789	1.223
A-42-00	A4200__-MM_-L-04_C4	HIPK_134	PP	0.093	0.093	0.000	0.237	0.114
A-42-00	A4200__-POC-L-02_C6	HIPK_135	PP	0.550	0.550	0.000	3.788	1.839
A-42-00	A4200__-POC-L-02_C6	HIPK_136	PP	0.262	0.262	0.000	1.393	0.658
A-42-00	A4200__-POC-L-02_C6	HIPK_137	PP	0.172	0.169	0.003	0.946	0.385
A-42-00	A4200__-POC-L-02_C7	HIPK_138	PP	0.340	0.340	0.000	2.265	0.896
A-42-00	A4200__-POC-L-02_C7	HIPK_139	PP	0.235	0.235	0.000	2.941	0.947
A-42-00	A4200__-MM_-L-04_C2	HIPK_140	PP	0.403	0.403	0.000	3.600	1.688
A-42-00	A4200__-MM_-L-04_C2	HIPK_141	PP	1.003	1.003	0.000	8.477	3.250
A-42-00	A4200__-MM_-L-04_C3	HIPK_142	PP	0.375	0.375	0.000	4.048	1.575
A-42-00	A4200__-MM_-L-04_C2	HIPK_143	PP	0.180	0.180	0.000	0.337	0.184
A-42-00	A4200__-MM_-L-04_C2	HIPK_144	PP	0.362	0.361	0.001	1.449	0.670
A-42-00	A4200__-MM_-L-04_C3	HIPK_145	PP	0.148	0.148	0.000	0.632	0.263
A-42-00	A4200__-MM_-L-04_C3	HIPK_146	PP	0.102	0.102	0.000	0.350	0.149
A-42-00	A4200__-MM_-L-04_C3	HIPK_147	PP	0.277	0.276	0.001	1.545	0.673
A-42-00	A4200__-MM_-L-04_C3	HIPK_148	PP	0.090	0.090	0.000	0.287	0.090
A-42-00	A4200__-POC-L-01_C4	HIPK_149	PP	1.299	1.219	0.080	3.395	1.779
A-42-00	A4200__-POC-L-01_C3	HIPK_150	PP	0.384	0.384	0.000	1.269	0.710
A-42-00	A4200__-POC-L-01_C4	HIPK_151	PP	0.660	0.657	0.003	4.190	1.287
A-42-00	A4200__-POC-L-01_C4	HIPK_152	PP	0.304	0.304	0.000	1.087	0.412
A-42-00	A4200__-POC-L-01_C3	HIPK_153	PP	0.482	0.482	0.000	1.975	0.963
A-42-00	A4200__-POC-L-01_C3	HIPK_154	PP	0.494	0.494	0.000	3.719	2.620
A-42-00	A4200__-POC-L-01_C3	HIPK_155	PP	0.162	0.119	0.043	0.416	0.188
A-42-00	A4200__-POC-L-01_C3	HIPK_156	PP	0.896	0.663	0.233	5.266	1.826
A-42-00	A4200__-POC-L-01_C3	HIPK_157	PP	0.516	0.386	0.130	1.802	0.658
A-42-00	A4200__-POC-L-01_C3	HIPK_158	PP	0.157	0.082	0.075	0.677	0.325
A-42-00	A4200__-POC-L-01_C3	HIPK_159	PP	0.279	0.279	0.000	0.684	0.317
A-42-00	A4200__-POC-L-01_C3	HIPK_160	PP	0.325	0.246	0.079	1.323	0.493
A-42-00	A4200__-POC-L-01_C3	HIPK_161	PP	0.137	0.127	0.010	0.587	0.283
A-42-00	A4200__-POC-L-01_C3	HIPK_162	PP	0.176	0.169	0.007	0.710	0.359
A-42-00	A4200__-POC-L-01_C3	HIPK_163	PP	0.328	0.328	0.000	0.718	0.451
A-42-00	A4200__-POC-L-01_C3	HIPK_164	PP	0.506	0.506	0.000	3.714	1.562

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C4	HIPK_165	PP	0.181	0.157	0.024	0.560	0.219
A-42-00	A4200__-POC-L-01_C3	HIPK_166	PP	0.179	0.177	0.002	2.351	0.804
A-42-00	A4200__-POC-L-01_C3	HIPK_167	PP	1.063	1.063	0.000	5.616	2.261
A-42-00	A4200__-POC-L-01_C3	HIPK_168	PP	0.094	0.094	0.000	0.190	0.127
A-42-00	A4200__-POC-L-01_C3	HIPK_169	PP	0.165	0.152	0.013	0.819	0.211
A-42-00	A4200__-POC-L-01_C3	HIPK_170	PP	1.182	1.136	0.046	3.530	1.904
A-42-00	A4200__-POC-L-01_C3	HIPK_171	PP	0.337	0.337	0.000	1.522	1.252
A-42-00	A4200__-POC-L-01_C3	HIPK_172	PP	0.349	0.349	0.000	1.432	0.831
A-42-00	A4200__-POC-L-01_C3	HIPK_173	PP	0.372	0.372	0.000	1.431	0.604
A-42-00	A4200__-POC-L-01_C3	HIPK_174	PP	0.319	0.000	0.319	0.951	0.797
A-42-00	A4200__-POC-L-01_C5	HIPK_175	PP	0.400	0.400	0.000	2.072	0.577
A-42-00	A4200__-POC-L-01_C5	HIPK_176	PP	0.093	0.093	0.000	0.266	0.087
A-42-00	A4200__-POC-L-01_C5	HIPK_177	PP	0.759	0.759	0.000	3.796	1.526
A-42-00	A4200__-POC-L-01_C5	HIPK_178	PP	0.102	0.101	0.001	0.254	0.116
A-42-00	A4200__-POC-L-01_C5	HIPK_179	PP	0.353	0.353	0.000	0.744	0.426
A-42-00	A4200__-POC-L-01_C5	HIPK_180	PP	0.128	0.124	0.004	0.598	0.233
A-42-00	A4200__-POC-L-01_C5	HIPK_181	PP	0.466	0.466	0.000	2.374	0.963
A-42-00	A4200__-POC-L-01_C5	HIPK_182	PP	0.286	0.249	0.037	2.013	1.047
A-42-00	A4200__-POC-L-01_C5	HIPK_183	PP	0.185	0.185	0.000	0.494	0.215
A-42-00	A4200__-POC-L-01_C5	HIPK_184	PP	0.856	0.856	0.000	6.421	2.137
A-42-00	A4200__-POC-L-01_C5	HIPK_185	PP	0.531	0.531	0.000	2.324	1.033
A-42-00	A4200__-MM_-L-03_C1	HIPK_186	PP	0.251	0.250	0.001	1.220	0.472
A-42-00	A4200__-POC-L-01_C5	HIPK_187	PP	0.121	0.086	0.035	0.444	0.306
A-42-00	A4200__-POC-L-01_C5	HIPK_188	PP	0.179	0.178	0.001	0.594	0.372
A-42-00	A4200__-POC-L-01_C5	HIPK_189	PP	0.744	0.744	0.000	4.160	1.930
A-42-00	A4200__-POC-L-01_C5	HIPK_190	PP	0.116	0.110	0.006	0.409	0.167
A-42-00	A4200__-POC-L-01_C5	HIPK_191	PP	0.083	0.072	0.011	0.274	0.102
A-42-00	A4200__-MM_-L-03_C1	HIPK_192	PP	0.236	0.236	0.000	1.361	0.455
A-42-00	A4200__-MM_-L-03_C1	HIPK_193	PP	0.109	0.106	0.003	0.262	0.140
A-42-00	A4200__-MM_-L-03_C1	HIPK_194	PP	0.096	0.086	0.010	0.352	0.148
A-42-00	A4200__-MM_-L-03_C1	HIPK_195	PP	0.552	0.552	0.000	3.139	1.482
A-42-00	A4200__-MM_-L-04_C15	HIPK_196	PP	0.274	0.274	0.000	1.211	0.586
A-42-00	A4200__-MM_-L-04_C15	HIPK_197	PP	0.124	0.124	0.000	0.460	0.266
A-42-00	A4200__-POC-L-01_C5	HIPK_198	PP	0.515	0.515	0.000	2.980	1.348

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C5	HIPK_199	PP	0.183	0.180	0.003	0.469	0.239
A-42-00	A4200__-POC-L-01_C5	HIPK_200	PP	0.140	0.139	0.001	0.812	0.330
A-42-00	A4200__-MM_-L-04_C15	HIPK_201	PP	0.177	0.177	0.000	0.794	0.222
A-42-00	A4200__-MM_-L-04_C15	HIPK_202	PP	0.185	0.185	0.000	0.538	0.275
A-42-00	A4200__-MM_-L-04_C15	HIPK_203	PP	0.320	0.316	0.004	1.486	0.728
A-42-00	A4200__-MM_-L-04_C15	HIPK_204	PP	0.085	0.085	0.000	0.197	0.107
A-42-00	A4200__-POC-L-01_C3	HIPK_205	PP	0.067	0.067	0.000	0.140	0.090
A-42-00	A4200__-POC-L-01_C3	HIPK_206	PP	0.475	0.473	0.002	2.603	1.279
A-42-00	A4200__-POC-L-01_C3	HIPK_207	PP	0.353	0.332	0.021	1.732	0.848
A-42-00	A4200__-POC-L-01_C3	HIPK_208	PP	0.658	0.654	0.004	2.924	1.481
A-42-00	A4200__-POC-L-01_C3	HIPK_209	PP	0.489	0.489	0.000	1.718	0.701
A-42-00	A4200__-POC-L-01_C3	HIPK_210	PP	0.485	0.485	0.000	1.609	0.777
A-42-00	A4200__-POC-L-01_C3	HIPK_211	PP	0.442	0.429	0.013	1.020	0.599
A-42-00	A4200__-POC-L-01_C3	HIPK_212	PP	0.106	0.068	0.038	0.359	0.112
A-42-00	A4200__-POC-L-01_C3	HIPK_213	PP	0.510	0.510	0.000	1.360	0.696
A-42-00	A4200__-POC-L-01_C3	HIPK_214	PP	0.143	0.143	0.000	0.279	0.143
A-42-00	A4200__-POC-L-01_C3	HIPK_215	PP	0.361	0.000	0.361	1.659	0.811
A-42-00	A4200__-POC-L-01_C3	HIPK_216	PP	0.634	0.634	0.000	2.107	0.831
A-42-00	A4200__-POC-L-01_C3	HIPK_217	PP	0.485	0.485	0.000	1.466	0.574
A-42-00	A4200__-POC-L-01_C3	HIPK_218	PP	0.757	0.757	0.000	4.568	2.140
A-42-00	A4200__-POC-L-01_C3	HIPK_219	PP	0.386	0.386	0.000	0.709	0.430
A-42-00	A4200__-POC-L-01_C3	HIPK_220	PP	0.691	0.687	0.004	2.671	1.184
A-42-00	A4200__-POC-L-01_C3	HIPK_221	PP	0.397	0.381	0.016	1.635	0.693
A-42-00	A4200__-POC-L-01_C3	HIPK_222	PP	0.053	0.053	0.000	0.138	0.093
A-42-00	A4200__-POC-L-01_C3	HIPK_223	PP	0.380	0.380	0.000	0.720	0.448
A-42-00	A4200__-POC-L-01_C3	HIPK_224	PP	0.166	0.166	0.000	0.283	0.183
A-42-00	A4200__-POC-L-01_C3	HIPK_225	PP	0.079	0.079	0.000	0.119	0.086
A-42-00	A4200__-POC-L-01_C3	HIPK_226	PP	0.176	0.176	0.000	0.239	0.173
A-42-00	A4200__-POC-L-01_C3	HIPK_227	PP	0.155	0.155	0.000	0.298	0.178
A-42-00	A4200__-POC-L-01_C3	HIPK_228	PP	0.144	0.144	0.000	0.240	0.160
A-42-00	A4200__-POC-L-01_C3	HIPK_229	PP	0.202	0.202	0.000	0.625	0.302
A-42-00	A4200__-POC-L-01_C3	HIPK_230	PP	0.155	0.151	0.004	0.376	0.173
A-42-00	A4200__-POC-L-01_C5	HIPK_231	PP	0.120	0.120	0.000	0.238	0.164
A-42-00	A4200__-POC-L-01_C5	HIPK_232	PP	0.468	0.468	0.000	1.854	1.008

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C3	HIPK_233	PP	0.215	0.000	0.215	0.241	0.182
A-42-00	A4200__-POC-L-01_C3	HIPK_234	PP	0.700	0.000	0.700	0.933	0.564
A-42-00	A4200__-MM_-L-04_C11	HIPK_235	PP	0.034	0.034	0.000	0.057	0.044
A-42-00	A4200__-MM_-L-04_C15	HIPK_236	PP	0.064	0.041	0.023	0.157	0.127
A-42-00	A4200__-POC-L-02_C3	HIPK_237	PP	0.192	0.192	0.000	0.233	0.212
A-42-00	A4200__-POC-L-02_C3	HIPK_238	PP	0.390	0.280	0.110	0.658	0.360
A-42-00	A4200__-POC-L-02_C3	HIPK_239	PP	1.297	1.282	0.015	1.475	1.232
A-42-00	A4200__-POC-L-02_C3	HIPK_240	PP	0.176	0.176	0.000	0.188	0.164
A-42-00	A4200__-MM_-L-04_C17	HIPK_241	PP	1.155	1.155	0.000	4.966	2.072
A-42-00	A4200__-MM_-L-04_C17	HIPK_242	PP	0.094	0.094	0.000	0.271	0.157
A-42-00	A4200__-MM_-L-04_C17	HIPK_243	PP	1.398	0.932	0.466	7.391	2.555
A-42-00	A4200__-IM_-L-05_C3	HIPK_244	PP	0.334	0.334	0.000	1.393	0.599
A-42-00	A4200__-MM_-L-04_C17	HIPK_245	PP	0.129	0.129	0.000	0.469	0.276
A-42-00	A4200__-IM_-L-05_C5	HIPK_246	PP	0.321	0.320	0.001	0.793	0.404
A-42-00	A4200__-IM_-L-05_C3	HIPK_247	PP	0.458	0.458	0.000	1.613	0.697
A-42-00	A4200__-IM_-L-05_C6	HIPK_248	PP	0.222	0.000	0.222	1.298	0.375
A-42-00	A4200__-IM_-L-05_C3	HIPK_249	PP	0.222	0.194	0.028	1.655	0.802
A-42-00	A4200__-IM_-L-05_C3	HIPK_250	PP	0.856	0.856	0.000	2.694	1.211
A-42-00	A4200__-IM_-L-05_C3	HIPK_251	PP	0.761	0.761	0.000	2.381	1.194
A-42-00	A4200__-IM_-L-05_C5	HIPK_252	PP	0.425	0.425	0.000	1.034	0.470
A-42-00	A4200__-IM_-L-05_C5	HIPK_253	PP	0.124	0.000	0.124	0.441	0.195
A-42-00	A4200__-IM_-L-05_C5	HIPK_254	PP	0.419	0.361	0.058	1.673	0.610
A-42-00	A4200__-IM_-L-05_C5	HIPK_255	PP	0.379	0.379	0.000	1.489	0.570
A-42-00	A4200__-IM_-L-05_C5	HIPK_256	PP	0.658	0.657	0.001	2.417	0.993
A-42-00	A4200__-MM_-L-07_C1	HIPK_257	PP	0.050	0.050	0.000	0.132	0.080
A-42-00	A4200__-MM_-L-07_C1	HIPK_258	PP	0.408	0.408	0.000	2.124	0.773
A-42-00	A4200__-MM_-L-07_C1	HIPK_259	PP	0.336	0.336	0.000	2.486	0.963
A-42-00	A4200__-MM_-L-07_C1	HIPK_260	PP	0.088	0.000	0.088	0.235	0.107
A-42-00	A4200__-MM_-L-07_C1	HIPK_261	PP	0.137	0.133	0.004	0.515	0.168
A-42-00	A4200__-IM_-L-05_C8	HIPK_262	PP	1.394	1.387	0.007	5.906	3.126
A-42-00	A4200__-IM_-L-05_C8	HIPK_263	PP	0.485	0.485	0.000	1.117	0.628
A-42-00	A4200__-IM_-L-05_C6	HIPK_264	PP	0.299	0.299	0.000	0.623	0.343
A-42-00	A4200__-IM_-L-05_C6	HIPK_265	PP	0.730	0.730	0.000	2.016	1.060
A-42-00	A4200__-IM_-L-05_C6	HIPK_266	PP	0.223	0.223	0.000	0.429	0.234

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C8	HIPK_267	PP	0.290	0.290	0.000	0.605	0.313
A-42-00	A4200__-MM_-L-07_C1	HIPK_268	PP	0.110	0.110	0.000	0.303	0.267
A-42-00	A4200__-MM_-L-07_C1	HIPK_269	PP	0.271	0.271	0.000	0.923	0.776
A-42-00	A4200__-MM_-L-07_C1	HIPK_270	PP	0.115	0.115	0.000	0.165	0.117
A-42-00	A4200__-MM_-L-04_C16	HIPK_271	PP	0.072	0.071	0.001	0.123	0.046
A-42-00	A4200__-MM_-L-04_C16	HIPK_272	PP	0.115	0.115	0.000	0.552	0.272
A-42-00	A4200__-MM_-L-04_C16	HIPK_273	PP	0.092	0.078	0.014	0.251	0.147
A-42-00	A4200__-MM_-L-04_C16	HIPK_274	PP	0.125	0.125	0.000	0.272	0.202
A-42-00	A4200__-MM_-L-04_C16	HIPK_275	PP	0.072	0.067	0.005	0.452	0.386
A-42-00	A4200__-MM_-L-04_C16	HIPK_276	PP	0.195	0.194	0.001	0.373	0.261
A-42-00	A4200__-MM_-L-04_C17	HIPK_277	PP	0.284	0.284	0.000	0.979	0.599
A-42-00	A4200__-IM_-L-05_C1	HIPK_278	PP	0.446	0.446	0.000	1.961	0.689
A-42-00	A4200__-MM_-L-04_C17	HIPK_279	PP	0.102	0.102	0.000	0.155	0.102
A-42-00	A4200__-IM_-L-05_C1	HIPK_280	PP	0.161	0.161	0.000	0.460	0.277
A-42-00	A4200__-IM_-L-05_C3	HIPK_281	PP	0.272	0.272	0.000	0.600	0.337
A-42-00	A4200__-IM_-L-05_C3	HIPK_282	PP	0.168	0.168	0.000	0.359	0.233
A-42-00	A4200__-IM_-L-05_C5	HIPK_283	PP	0.039	0.039	0.000	0.059	0.046
A-42-00	A4200__-IM_-L-05_C6	HIPK_284	PP	0.917	0.917	0.000	7.371	4.151
A-42-00	A4200__-MM_-L-07_C19	HIPK_285	PP	0.375	0.375	0.000	4.310	2.341
A-42-00	A4200__-MM_-L-07_C2	HIPK_286	PP	0.385	0.385	0.000	3.209	1.789
A-42-00	A4200__-MM_-L-07_C2	HIPK_287	PP	0.124	0.124	0.000	0.313	0.172
A-42-00	A4200__-IM_-L-05_C2	HIPK_288	PP	0.091	0.091	0.000	0.210	0.159
A-42-00	A4200__-IM_-L-05_C4	HIPK_289	PP	0.129	0.129	0.000	0.264	0.147
A-42-00	A4200__-IM_-L-05_C2	HIPK_290	PP	0.121	0.121	0.000	0.260	0.187
A-42-00	A4200__-IM_-L-05_C2	HIPK_291	PP	1.157	1.157	0.000	4.510	1.968
A-42-00	A4200__-IM_-L-05_C2	HIPK_292	PP	0.645	0.645	0.000	2.743	1.242
A-42-00	A4200__-MM_-L-04_C18	HIPK_293	PP	1.410	1.410	0.000	7.470	3.005
A-42-00	A4200__-MM_-L-06_C1	HIPK_294	PP	1.375	1.370	0.005	7.397	3.212
A-42-00	A4200__-MM_-L-06_C1	HIPK_295	PP	0.431	0.431	0.000	1.618	0.762
A-42-00	A4200__-MM_-L-06_C1	HIPK_296	PP	0.078	0.078	0.000	0.310	0.150
A-42-00	A4200__-MM_-L-06_C1	HIPK_297	PP	0.074	0.069	0.005	0.376	0.117
A-42-00	A4200__-MM_-L-06_C1	HIPK_298	PP	0.200	0.200	0.000	0.609	0.349
A-42-00	A4200__-MM_-L-06_C1	HIPK_299	PP	0.100	0.099	0.001	0.480	0.157
A-42-00	A4200__-MM_-L-06_C1	HIPK_300	PP	0.119	0.119	0.000	0.392	0.192

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C16	HIPK_301	PP	2.431	2.425	0.006	16.874	7.777
A-42-00	A4200__-MM_-L-07_C16	HIPK_302	PP	0.076	0.076	0.000	0.156	0.108
A-42-00	A4200__-MM_-L-07_C15	HIPK_303	PP	1.035	0.945	0.090	4.543	2.303
A-42-00	A4200__-MM_-L-07_C5	HIPK_304	PP	0.045	0.043	0.002	0.072	0.068
A-42-00	A4200__-MM_-L-07_C1	HIPK_305	PP	0.326	0.323	0.003	0.989	0.384
A-42-00	A4200__-MM_-L-07_C5	HIPK_306	PP	0.043	0.043	0.000	0.292	0.087
A-42-00	A4200__-MM_-L-07_C6	HIPK_307	PP	0.297	0.287	0.010	1.918	1.105
A-42-00	A4200__-MM_-L-07_C4	HIPK_308	PP	1.219	1.195	0.024	8.743	3.600
A-42-00	A4200__-MM_-L-07_C4	HIPK_309	PP	1.490	1.490	0.000	8.501	3.947
A-42-00	A4200__-IM_-L-05_C7	HIPK_310	PP	0.535	0.534	0.001	3.781	1.868
A-42-00	A4200__-MM_-L-07_C4	HIPK_311	PP	0.155	0.155	0.000	1.455	0.779
A-42-00	A4200__-MM_-L-07_C4	HIPK_312	PP	0.124	0.124	0.000	0.280	0.158
A-42-00	A4200__-MM_-L-07_C4	HIPK_313	PP	0.094	0.094	0.000	0.439	0.288
A-42-00	A4200__-MM_-L-07_C4	HIPK_314	PP	1.593	1.581	0.012	10.768	4.591
A-42-00	A4200__-MM_-L-07_C9	HIPK_315	PP	1.213	1.213	0.000	12.864	5.608
A-42-00	A4200__-MM_-L-07_C12	HIPK_316	PP	0.247	0.247	0.000	1.256	0.381
A-42-00	A4200__-MM_-L-07_C12	HIPK_317	PP	0.046	0.046	0.000	0.074	0.053
A-42-00	A4200__-MM_-L-07_C12	HIPK_318	PP	0.426	0.422	0.004	1.561	1.078
A-42-00	A4200__-MM_-L-07_C9	HIPK_319	PP	0.141	0.141	0.000	0.982	0.388
A-42-00	A4200__-MM_-L-07_C9	HIPK_320	PP	0.110	0.110	0.000	0.436	0.203
A-42-00	A4200__-MM_-L-07_C9	HIPK_321	PP	0.580	0.573	0.007	6.611	3.212
A-42-00	A4200__-MM_-L-07_C2	HIPK_322	PP	0.420	0.420	0.000	2.208	0.694
A-42-00	A4200__-MM_-L-07_C9	HIPK_323	PP	0.254	0.254	0.000	1.665	0.718
A-42-00	A4200__-MM_-L-07_C9	HIPK_324	PP	0.095	0.095	0.000	0.728	0.289
A-42-00	A4200__-MM_-L-07_C2	HIPK_325	PP	0.033	0.033	0.000	0.117	0.047
A-42-00	A4200__-MM_-L-07_C7	HIPK_326	PP	0.055	0.055	0.000	0.131	0.100
A-42-00	A4200__-MM_-L-07_C7	HIPK_327	PP	0.515	0.515	0.000	5.688	3.451
A-42-00	A4200__-MM_-L-07_C6	HIPK_328	PP	0.119	0.119	0.000	0.275	0.164
A-42-00	A4200__-MM_-L-07_C8	HIPK_329	PP	0.197	0.197	0.000	0.515	0.237
A-42-00	A4200__-MM_-L-07_C4	HIPK_330	PP	0.919	0.919	0.000	4.821	1.835
A-42-00	A4200__-MM_-L-07_C7	HIPK_331	PP	0.208	0.208	0.000	0.642	0.343
A-42-00	A4200__-MM_-L-07_C8	HIPK_332	PP	0.497	0.497	0.000	2.524	0.996
A-42-00	A4200__-MM_-L-07_C18	HIPK_333	PP	0.138	0.138	0.000	0.419	0.183
A-42-00	A4200__-MM_-L-07_C6	HIPK_334	PP	1.639	1.636	0.003	8.343	4.725

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C6	HIPK_335	PP	1.899	1.899	0.000	12.200	5.650
A-42-00	A4200__-MM_-L-07_C10	HIPK_336	PP	0.947	0.942	0.005	4.998	2.041
A-42-00	A4200__-MM_-L-07_C13	HIPK_337	PP	0.092	0.092	0.000	0.155	0.110
A-42-00	A4200__-MM_-L-07_C13	HIPK_338	PP	0.421	0.421	0.000	1.556	0.628
A-42-00	A4200__-MM_-L-07_C17	HIPK_339	PP	0.115	0.102	0.013	0.123	0.098
A-42-00	A4200__-MM_-L-07_C17	HIPK_340	PP	0.059	0.059	0.000	0.066	0.061
A-42-00	A4200__-MM_-L-07_C17	HIPK_341	PP	0.129	0.128	0.001	0.338	0.128
A-42-00	A4200__-MM_-L-07_C15	HIPK_342	PP	0.130	0.130	0.000	0.228	0.161
A-42-00	A4200__-MM_-L-04_C13	HIPK_343	PP	0.267	0.267	0.000	1.590	0.603
A-42-00	A4200__-MM_-L-04_C13	HIPK_344	PP	0.426	0.426	0.000	1.934	0.875
A-42-00	A4200__-MM_-L-04_C13	HIPK_345	PP	0.145	0.143	0.002	0.766	0.294
A-42-00	A4200__-MM_-L-04_C13	HIPK_346	PP	0.157	0.156	0.001	1.072	0.401
A-42-00	A4200__-MM_-L-04_C13	HIPK_347	PP	0.173	0.173	0.000	0.302	0.204
A-42-00	A4200__-MM_-L-04_C13	HIPK_348	PP	0.278	0.278	0.000	0.953	0.503
A-42-00	A4200__-MM_-L-04_C13	HIPK_349	PP	0.032	0.032	0.000	0.080	0.059
A-42-00	A4200__-MM_-L-06_C1	HIPK_350	PP	0.086	0.086	0.000	0.351	0.163
A-42-00	A4200__-MM_-L-06_C1	HIPK_351	PP	0.307	0.307	0.000	1.618	0.492
A-42-00	A4200__-IM_-L-05_C1	HIPK_352	PP	0.112	0.105	0.007	0.627	0.139
A-42-00	A4200__-IM_-L-05_C1	HIPK_353	PP	0.341	0.341	0.000	1.082	0.540
A-42-00	A4200__-MM_-L-04_C12	HIPK_354	PP	0.508	0.508	0.000	0.612	0.521
A-42-00	A4200__-MM_-L-04_C5	HIPK_355	PP	0.098	0.098	0.000	0.211	0.118
A-42-00	A4200__-MM_-L-06_C1	HIPK_356	PP	0.115	0.115	0.000	0.273	0.150
A-42-00	A4200__-MM_-L-04_C5	HIPK_357	PP	0.291	0.291	0.000	0.932	0.436
A-42-00	A4200__-MM_-L-04_C12	HIPK_358	PP	0.458	0.458	0.000	2.150	0.865
A-42-00	A4200__-MM_-L-04_C5	HIPK_359	PP	0.214	0.214	0.000	0.628	0.320
A-42-00	A4200__-MM_-L-04_C5	HIPK_360	PP	0.312	0.312	0.000	0.630	0.413
A-42-00	A4200__-MM_-L-04_C13	HIPK_361	PP	0.368	0.368	0.000	1.810	0.787
A-42-00	A4200__-MM_-L-04_C12	HIPK_362	PP	0.461	0.461	0.000	2.353	1.334
A-42-00	A4200__-MM_-L-04_C7	HIPK_363	PP	0.353	0.353	0.000	0.826	0.345
A-42-00	A4200__-MM_-L-04_C7	HIPK_364	PP	0.427	0.417	0.010	0.769	0.426
A-42-00	A4200__-MM_-L-04_C7	HIPK_365	PP	0.139	0.139	0.000	0.155	0.116
A-42-00	A4200__-MM_-L-04_C6	HIPK_366	PP	0.113	0.113	0.000	0.133	0.107
A-42-00	A4200__-MM_-L-04_C5	HIPK_367	PP	0.175	0.175	0.000	0.711	0.193
A-42-00	A4200__-MM_-L-04_C17	HIPK_368	PP	0.290	0.033	0.257	0.878	0.545

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C3	HIPK_369	PP	0.290	0.290	0.000	1.324	0.514
A-42-00	A4200__-MM_-L-07_C3	HIPK_370	PP	0.227	0.227	0.000	1.297	0.595
A-42-00	A4200__-MM_-L-07_C13	HIPK_371	PP	0.372	0.372	0.000	0.825	0.701
A-42-00	A4200__-MM_-L-07_C12	HIPK_372	PP	0.071	0.071	0.000	0.208	0.124
A-42-00	A4200__-MM_-L-07_C13	HIPK_373	PP	0.086	0.086	0.000	0.122	0.084
A-42-00	A4200__-MM_-L-07_C11	HIPK_374	PP	0.098	0.089	0.009	0.139	0.056
A-42-00	A4200__-MM_-L-07_C11	HIPK_375	PP	0.056	0.056	0.000	0.071	0.061
A-42-00	A4200__-MM_-L-07_C6	HIPK_376	PP	0.110	0.110	0.000	0.371	0.127
A-42-00	A4200__-MM_-L-04_C16	HIPK_377	PP	1.063	0.000	1.063	4.449	3.928
A-42-00	A4200__-MM_-L-04_C17	HIPK_378	PP	0.612	0.038	0.574	1.097	0.680
A-42-00	A4200__-IM_-L-05_C5	HIPK_379	PP	0.413	0.000	0.413	0.646	0.271
A-42-00	A4200__-IM_-L-05_C6	HIPK_380	PP	0.820	0.040	0.780	1.219	0.656
A-42-00	A4200__-IM_-L-05_C7	HIPK_381	PP	0.062	0.000	0.062	0.075	0.064
A-42-00	A4200__-MM_-L-07_C1	HIPK_382	PP	0.135	0.000	0.135	0.140	0.086
A-42-00	A4200__-MM_-L-07_C18	HIPK_383	PP	0.409	0.000	0.409	0.425	0.281
A-42-00	A4200__-MM_-L-04_C6	HIPK_384	PP	0.152	0.152	0.000	0.264	0.147
A-42-00	A4200__-MM_-L-07_C12	HIPK_385	PP	0.148	0.148	0.000	0.300	0.207
A-42-00	A4200__-MM_-L-07_C12	HIPK_386	PP	0.128	0.128	0.000	0.417	0.278
A-42-00	A4200__-MM_-L-06_C1	HIPK_387	PP	0.168	0.168	0.000	0.507	0.310
A-42-00	A4200__-MM_-L-07_C1	HIPK_388	PP	0.276	0.276	0.000	0.806	0.431
A-42-00	A4200__-IM_-L-05_C5	HIPK_389	PP	0.354	0.354	0.000	1.031	0.448
A-42-00	A4200__-MM_-L-04_C17	HIPK_390	PP	0.705	0.705	0.000	3.598	1.143
A-42-00	A4200__-IM_-L-05_C3	HIPK_391	PP	0.421	0.421	0.000	2.401	0.769
A-42-00	A4200__-IM_-L-05_C3	HIPK_392	PP	0.499	0.499	0.000	2.815	1.067
A-42-00	A4200__-MM_-L-04_C17	HIPK_393	PP	0.511	0.511	0.000	2.695	1.114
A-42-00	A4200__-MM_-L-04_C17	HIPK_394	PP	1.198	1.198	0.000	7.774	3.079
A-42-00	A4200__-IM_-L-05_C3	HIPK_395	PP	0.062	0.062	0.000	0.136	0.072
A-42-00	A4200__-IM_-L-05_C3	HIPK_396	PP	0.185	0.185	0.000	1.565	0.868
A-42-00	A4200__-IM_-L-05_C5	HIPK_397	PP	0.134	0.134	0.000	0.411	0.268
A-42-00	A4200__-IM_-L-05_C5	HIPK_398	PP	0.058	0.058	0.000	0.128	0.066
A-42-00	A4200__-IM_-L-05_C6	HIPK_399	PP	0.371	0.371	0.000	1.571	0.713
A-42-00	A4200__-IM_-L-05_C8	HIPK_400	PP	0.469	0.469	0.000	1.893	0.846
A-42-00	A4200__-IM_-L-05_C7	HIPK_401	PP	0.265	0.135	0.130	1.506	0.647
A-42-00	A4200__-IM_-L-05_C7	HIPK_402	PP	0.056	0.056	0.000	0.138	0.068

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C6	HIPK_403	PP	0.371	0.371	0.000	2.160	0.718
A-42-00	A4200__-IM_-L-05_C8	HIPK_404	PP	0.241	0.000	0.241	0.406	0.349
A-42-00	A4200__-MM_-L-04_C15	HIPK_405	PP	0.068	0.068	0.000	0.305	0.086
A-42-00	A4200__-POC-L-01_C5	HIPK_406	PP	0.127	0.127	0.000	0.663	0.269
A-42-00	A4200__-MM_-L-07_C16	HIPK_407	PP	0.068	0.063	0.005	0.257	0.087
A-42-00	A4200__-MM_-L-07_C1	HIPK_408	PP	0.624	0.426	0.198	1.837	1.591
A-42-00	A4200__-MM_-L-07_C1	HIPK_409	PP	0.119	0.119	0.000	0.345	0.121
A-42-00	A4200__-MM_-L-07_C10	HIPK_410	PP	0.164	0.163	0.001	1.966	0.669
A-42-00	A4200__-MM_-L-07_C9	HIPK_411	PP	0.098	0.098	0.000	0.241	0.165
A-42-00	A4200__-MM_-L-07_C2	HIPK_412	PP	0.032	0.032	0.000	0.081	0.046
A-42-00	A4200__-MM_-L-07_C15	HIPK_413	PP	0.115	0.115	0.000	0.854	0.389
A-42-00	A4200__-POC-L-01_C3	HIPK_414	PP	0.124	0.107	0.017	0.258	0.148
A-42-00	A4200__-POC-L-01_C3	HIPK_415	PP	0.074	0.074	0.000	0.301	0.146
A-42-00	A4200__-POC-L-01_C5	HIPK_416	PP	0.070	0.070	0.000	0.338	0.104
A-42-00	A4200__-POC-L-01_C5	HIPK_417	PP	0.068	0.068	0.000	0.520	0.130
A-42-00	A4200__-POC-L-02_C3	HIPK_418	PP	0.084	0.061	0.023	0.191	0.073
A-42-00	A4200__-POC-L-02_C4	HIPK_419	PP	0.153	0.152	0.001	0.249	0.157
A-42-00	A4200__-POC-L-02_C8	HIPK_420	PP	0.037	0.037	0.000	0.076	0.031
A-37Z-00	INT_A37A_C1	HIPK_1001	BR	0.004	0.004	0.000	0.006	0.002
A-37Z-00	INT_A37A_C1	HIPK_1002	BR	0.017	0.004	0.013	0.054	0.022
A-37Z-00	INT_A37A_C1	HIPK_1003	BR	0.046	0.046	0.000	0.111	0.024
A-37Z-00	INT_A37A_C1	HIPK_1004	BR	0.019	0.019	0.000	0.041	0.011
A-37Z-00	INT_A37A_C1	HIPK_1005	BR	0.025	0.018	0.007	0.040	0.022
A-37Z-00	INT_A37A_C1	HIPK_1006	BR	0.004	0.004	0.000	0.008	0.004
A-37Z-00	INT_A37A_C1	HIPK_1007	BR	0.008	0.008	0.000	0.012	0.005
A-37Z-00	INT_A37A_C1	HIPK_1008	BR	0.017	0.017	0.000	0.050	0.015
A-37Z-00	INT_A37A_C1	HIPK_1009	BR	0.008	0.008	0.000	0.013	0.000
A-37Z-00	INT_A37A_C1	HIPK_1010	BR	0.005	0.005	0.000	0.007	0.003
A-37Z-00	INT_A37A_C1	HIPK_1011	BR	0.005	0.002	0.003	0.007	0.004
A-37Z-00	INT_A37A_C1	HIPK_1012	BR	0.080	0.079	0.001	0.192	0.069
A-37Z-00	INT_A37A_C1	HIPK_1013	BR	0.007	0.007	0.000	0.014	0.006
A-37Z-00	INT_A37A_C1	HIPK_1014	BR	0.006	0.006	0.000	0.008	0.000
A-37Z-00	INT_A37A_C1	HIPK_1015	BR	0.003	0.003	0.000	0.003	0.000
A-38-00	INT_A38_C1	HIPK_1016	BR	0.015	0.002	0.013	0.020	0.000

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-40-00	INT_A40_C1	HIPK_1017	BR	0.038	0.038	0.000	0.041	0.003
A-40-00	INT_A40_C1	HIPK_1018	BR	0.005	0.004	0.001	0.008	0.002
A-40-00	INT_A40_C1	HIPK_1019	BR	0.018	0.010	0.008	0.023	0.008
A-41-00	HR001_C2	HIPK_1020	BR	0.012	0.000	0.012	0.036	0.012
A-41-00	HR001_C2	HIPK_1021	BR	0.018	0.005	0.013	0.027	0.009
A-41-00	HR002_C1	HIPK_1022	BR	0.006	0.006	0.000	0.009	0.000
A-41-00	HR002_C1	HIPK_1023	BR	0.299	0.075	0.224	0.403	0.085
A-41-00	HR002_C1	HIPK_1024	BR	0.016	0.015	0.001	0.028	0.000
A-41-00	HR002_C1	HIPK_1025	BR	0.015	0.006	0.009	0.023	0.006
A-41-00	HR002_C1	HIPK_1026	BR	0.005	0.005	0.000	0.008	0.004
A-41-00	A41IN_C1	HIPK_1027	BR	0.048	0.028	0.020	0.076	0.042
A-41-00	HR001_C3	HIPK_1028	BR	0.057	0.044	0.013	0.289	0.140
A-41-00	HR001_C3	HIPK_1029	BR	0.039	0.038	0.001	0.063	0.020
A-41-00	HR001_C1	HIPK_1030	BR	0.014	0.009	0.005	0.018	0.007
A-41-00	HR001_C2	HIPK_1031	BR	0.095	0.086	0.009	0.438	0.184
A-41-00	HR001_C2	HIPK_1032	BR	0.053	0.053	0.000	0.194	0.085
A-41-00	HR001_C2	HIPK_1033	BR	0.021	0.002	0.019	0.023	0.008
A-41-00	HR001_C2	HIPK_1034	BR	0.053	0.042	0.011	0.079	0.050
A-41-00	HR001_C2	HIPK_1035	BR	0.032	0.032	0.000	0.122	0.059
A-41-00	HR001_C2	HIPK_1036	BR	0.101	0.101	0.000	0.350	0.143
A-41-00	HR001_C2	HIPK_1037	BR	0.019	0.019	0.000	0.046	0.015
A-41-00	HR001_C2	HIPK_1038	BR	0.037	0.033	0.004	0.140	0.061
A-41-00	HR002_C1	HIPK_1039	BR	0.073	0.035	0.038	0.112	0.085
A-41-00	HR002_C1	HIPK_1040	BR	0.023	0.018	0.005	0.029	0.003
A-41-00	HR002_C1	HIPK_1041	BR	0.018	0.018	0.000	0.029	0.007
A-41-00	HR002_C1	HIPK_1042	BR	0.006	0.006	0.000	0.011	0.001
A-41-00	HR002_C1	HIPK_1043	BR	0.095	0.094	0.001	0.614	0.239
A-41-00	HR002_C1	HIPK_1044	BR	0.025	0.025	0.000	0.041	0.009
A-41-00	HR002_C1	HIPK_1045	BR	0.108	0.108	0.000	0.296	0.075
A-41-00	HR002_C1	HIPK_1046	BR	0.036	0.028	0.008	0.064	0.001
A-41-00	HR002_C1	HIPK_1047	BR	0.074	0.074	0.000	0.111	0.057
A-41-00	HR002_C1	HIPK_1048	BR	0.254	0.174	0.080	1.481	0.641
A-41-00	HR002_C1	HIPK_1049	BR	0.014	0.014	0.000	0.027	0.013
A-41-00	HR002_C1	HIPK_1050	BR	0.057	0.057	0.000	0.190	0.049

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_1051	BR	0.043	0.043	0.000	0.105	0.044
A-41-00	HR002_C1	HIPK_1052	BR	0.016	0.016	0.000	0.024	0.008
A-41-00	HR002_C1	HIPK_1053	BR	0.073	0.072	0.001	0.270	0.085
A-41-00	HR002_C1	HIPK_1054	BR	0.035	0.035	0.000	0.084	0.030
A-41-00	HR002_C1	HIPK_1055	BR	0.161	0.135	0.026	0.394	0.033
A-41-00	HR002_C1	HIPK_1056	BR	0.084	0.083	0.001	0.540	0.228
A-41-00	HR002_C1	HIPK_1057	BR	0.013	0.013	0.000	0.024	0.009
A-41-00	HR002_C1	HIPK_1058	BR	0.017	0.017	0.000	0.035	0.007
A-41-00	HR002_C1	HIPK_1059	BR	0.079	0.079	0.000	0.253	0.051
A-41-00	HR002_C1	HIPK_1060	BR	0.065	0.065	0.000	0.237	0.106
A-41-00	HR002_C1	HIPK_1061	BR	0.022	0.022	0.000	0.042	0.009
A-41-00	HR002_C1	HIPK_1062	BR	0.024	0.024	0.000	0.039	0.007
A-41-00	HR002_C1	HIPK_1063	BR	0.023	0.023	0.000	0.028	0.002
A-41-00	HR002_C1	HIPK_1064	BR	0.067	0.066	0.001	0.100	0.040
A-41-00	HR002_C1	HIPK_1065	BR	0.020	0.020	0.000	0.028	0.008
A-41-00	HR002_C1	HIPK_1066	BR	0.009	0.009	0.000	0.012	0.003
A-41-00	HR002_C1	HIPK_1067	BR	0.074	0.074	0.000	0.284	0.115
A-41-00	HR002_C1	HIPK_1068	BR	0.011	0.010	0.001	0.016	0.003
A-41-00	HR002_C1	HIPK_1069	BR	0.058	0.056	0.002	0.123	0.066
A-41-00	HR002_C1	HIPK_1070	BR	0.016	0.016	0.000	0.024	0.004
A-41-00	HR002_C1	HIPK_1071	BR	0.076	0.076	0.000	0.163	0.079
A-41-00	HR002_C1	HIPK_1072	BR	0.076	0.076	0.000	0.182	0.093
A-41-00	HR002_C1	HIPK_1073	BR	0.009	0.009	0.000	0.012	0.004
A-41-00	HR002_C1	HIPK_1074	BR	0.021	0.021	0.000	0.037	0.019
A-41-00	HR002_C1	HIPK_1075	BR	0.045	0.044	0.001	0.083	0.023
A-41-00	HR002_C1	HIPK_1076	BR	0.014	0.014	0.000	0.019	0.002
A-41-00	HR002_C1	HIPK_1077	BR	0.031	0.027	0.004	0.066	0.012
A-41-00	HR002_C1	HIPK_1078	BR	0.048	0.045	0.003	0.202	0.072
A-41-00	HR002_C1	HIPK_1079	BR	0.053	0.053	0.000	0.154	0.056
A-41-00	HR002_C1	HIPK_1080	BR	0.059	0.059	0.000	0.211	0.100
A-41-00	HR002_C1	HIPK_1081	BR	0.013	0.009	0.004	0.021	0.007
A-41-00	HR002_C1	HIPK_1082	BR	0.028	0.028	0.000	0.048	0.011
A-41-00	HR002_C1	HIPK_1083	BR	0.006	0.006	0.000	0.009	0.002
A-41-00	HR002_C1	HIPK_1084	BR	0.057	0.057	0.000	0.133	0.064

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_1085	BR	0.023	0.023	0.000	0.054	0.023
A-41-00	HR002_C1	HIPK_1086	BR	0.019	0.019	0.000	0.053	0.024
A-41-00	HR002_C1	HIPK_1087	BR	0.013	0.013	0.000	0.024	0.004
A-41-00	HR002_C1	HIPK_1088	BR	0.016	0.016	0.000	0.030	0.007
A-41-00	HR002_C1	HIPK_1089	BR	0.015	0.014	0.001	0.024	0.005
A-41-00	HR002_C1	HIPK_1090	BR	0.005	0.004	0.001	0.006	0.003
A-41-00	HR002_C1	HIPK_1091	BR	0.005	0.005	0.000	0.009	0.005
A-41-00	HR002_C1	HIPK_1092	BR	0.033	0.031	0.002	0.123	0.039
A-41-00	HR002_C1	HIPK_1093	BR	0.032	0.020	0.012	0.046	0.026
A-41-00	HR002_C1	HIPK_1094	BR	0.017	0.011	0.006	0.036	0.016
A-41-00	HR002_C1	HIPK_1095	BR	0.043	0.043	0.000	0.109	0.038
A-41-00	HR002_C1	HIPK_1096	BR	0.025	0.025	0.000	0.052	0.013
A-41-00	HR002_C1	HIPK_1097	BR	0.027	0.025	0.002	0.055	0.006
A-41-00	HR002_C1	HIPK_1098	BR	0.010	0.010	0.000	0.015	0.006
A-41-00	HR002_C1	HIPK_1099	BR	0.030	0.009	0.021	0.050	0.005
A-41-00	HR002_C1	HIPK_1100	BR	0.399	0.399	0.000	2.188	0.468
A-41-00	HR002_C1	HIPK_1101	BR	0.007	0.007	0.000	0.014	0.006
A-41-00	HR002_C1	HIPK_1102	BR	0.013	0.013	0.000	0.024	0.000
A-41-00	HR002_C1	HIPK_1103	BR	0.019	0.018	0.001	0.035	0.017
A-41-00	HR002_C1	HIPK_1104	BR	0.011	0.011	0.000	0.014	0.003
A-41-00	HR002_C1	HIPK_1105	BR	0.046	0.046	0.000	0.107	0.031
A-41-00	HR002_C1	HIPK_1106	BR	0.029	0.011	0.018	0.049	0.001
A-41-00	HR002_C1	HIPK_1107	BR	0.009	0.009	0.000	0.013	0.001
A-41-00	HR002_C1	HIPK_1108	BR	0.027	0.026	0.001	0.069	0.012
A-41-00	HR002_C1	HIPK_1109	BR	0.010	0.010	0.000	0.019	0.007
A-41-00	HR002_C1	HIPK_1110	BR	0.075	0.074	0.001	0.211	0.112
A-41-00	HR002_C1	HIPK_1111	BR	0.049	0.049	0.000	0.199	0.098
A-41-00	HR002_C1	HIPK_1112	BR	0.080	0.079	0.001	0.210	0.095
A-41-00	HR002_C1	HIPK_1113	BR	0.005	0.005	0.000	0.007	0.002
A-41-00	HR002_C1	HIPK_1114	BR	0.005	0.005	0.000	0.007	0.003
A-41-00	HR002_C1	HIPK_1115	BR	0.040	0.039	0.001	0.090	0.015
A-41-00	HR002_C1	HIPK_1116	BR	0.071	0.054	0.017	0.213	0.096
A-41-00	HR002_C1	HIPK_1117	BR	0.029	0.027	0.002	0.062	0.036
A-41-00	HR002_C1	HIPK_1118	BR	0.055	0.054	0.001	0.244	0.111

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_1119	BR	0.053	0.050	0.003	0.285	0.089
A-41-00	HR002_C1	HIPK_1120	BR	0.021	0.021	0.000	0.039	0.015
A-41-00	HR002_C1	HIPK_1121	BR	0.012	0.012	0.000	0.022	0.002
A-41-00	HR002_C1	HIPK_1122	BR	0.009	0.009	0.000	0.015	0.007
A-41-00	HR002_C1	HIPK_1123	BR	0.003	0.003	0.000	0.007	0.000
A-41-00	HR002_C1	HIPK_1124	BR	0.025	0.025	0.000	0.067	0.033
A-41-00	HR002_C1	HIPK_1125	BR	0.012	0.012	0.000	0.034	0.018
A-41-00	HR002_C1	HIPK_1126	BR	0.021	0.021	0.000	0.053	0.016
A-41-00	HR002_C1	HIPK_1127	BR	0.006	0.006	0.000	0.009	0.004
A-41-00	HR002_C1	HIPK_1128	BR	0.021	0.021	0.000	0.042	0.014
A-41-00	HR002_C1	HIPK_1129	BR	0.005	0.005	0.000	0.011	0.000
A-41-00	HR002_C1	HIPK_1130	BR	0.012	0.010	0.002	0.025	0.012
A-41-00	HR002_C1	HIPK_1131	BR	0.011	0.009	0.002	0.023	0.008
A-41-00	HR002_C1	HIPK_1132	BR	0.030	0.025	0.005	0.035	0.019
A-41-00	HR002_C1	HIPK_1133	BR	0.046	0.035	0.011	0.095	0.005
A-41-00	HR002_C1	HIPK_1134	BR	0.023	0.023	0.000	0.098	0.054
A-41-00	HR002_C1	HIPK_1135	BR	0.023	0.023	0.000	0.073	0.032
A-41-00	HR002_C1	HIPK_1136	BR	0.015	0.013	0.002	0.024	0.007
A-41-00	HR002_C1	HIPK_1137	BR	0.026	0.023	0.003	0.039	0.023
A-41-00	HR002_C1	HIPK_1138	BR	0.013	0.013	0.000	0.025	0.010
A-41-00	HR002_C1	HIPK_1139	BR	0.015	0.015	0.000	0.018	0.003
A-41-00	HR002_C1	HIPK_1140	BR	0.019	0.019	0.000	0.030	0.009
A-41-00	HR002_C1	HIPK_1141	BR	0.021	0.021	0.000	0.041	0.010
A-41-00	HR002_C1	HIPK_1142	BR	0.016	0.016	0.000	0.045	0.012
A-41-00	HR002_C1	HIPK_1143	BR	0.013	0.013	0.000	0.029	0.011
A-41-00	HR002_C1	HIPK_1144	BR	0.023	0.023	0.000	0.076	0.039
A-41-00	HR002_C1	HIPK_1145	BR	0.020	0.016	0.004	0.032	0.003
A-41-00	HR002_C1	HIPK_1146	BR	0.027	0.021	0.006	0.075	0.030
A-41-00	HR002_C1	HIPK_1147	BR	0.009	0.007	0.002	0.018	0.003
A-41-00	HR002_C1	HIPK_1148	BR	0.009	0.009	0.000	0.016	0.000
A-41-00	HR002_C1	HIPK_1149	BR	0.083	0.083	0.000	0.280	0.124
A-41-00	HR002_C1	HIPK_1150	BR	0.015	0.014	0.001	0.032	0.011
A-41-00	HR002_C1	HIPK_1151	BR	0.056	0.037	0.019	0.118	0.066
A-41-00	HR002_C1	HIPK_1152	BR	0.009	0.009	0.000	0.020	0.009

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_1153	BR	0.053	0.053	0.000	0.178	0.076
A-41-00	HR002_C1	HIPK_1154	BR	0.052	0.050	0.002	0.251	0.144
A-41-00	HR001_C2	HIPK_1155	BR	0.098	0.095	0.003	0.267	0.112
A-41-00	HR001_C2	HIPK_1156	BR	0.024	0.024	0.000	0.042	0.007
A-41-00	HR002_C1	HIPK_1157	BR	0.007	0.007	0.000	0.014	0.007
A-41-00	HR002_C1	HIPK_1158	BR	0.009	0.009	0.000	0.013	0.003
A-41-00	HR002_C1	HIPK_1159	BR	0.034	0.034	0.000	0.065	0.025
A-41-00	HR002_C1	HIPK_1160	BR	0.008	0.008	0.000	0.010	0.001
A-41-00	HR001_C2	HIPK_1161	BR	0.020	0.020	0.000	0.056	0.022
A-41-00	HR001_C2	HIPK_1162	BR	0.008	0.008	0.000	0.015	0.005
A-41-00	HR002_C1	HIPK_1163	BR	0.134	0.125	0.009	0.419	0.179
A-41-00	HR002_C1	HIPK_1164	BR	0.011	0.011	0.000	0.022	0.001
A-41-00	HR002_C1	HIPK_1165	BR	0.029	0.029	0.000	0.066	0.017
A-41-00	HR002_C1	HIPK_1166	BR	0.010	0.010	0.000	0.018	0.001
A-41-00	HR002_C1	HIPK_1167	BR	0.017	0.017	0.000	0.024	0.007
A-41-00	HR002_C1	HIPK_1168	BR	0.020	0.019	0.001	0.027	0.012
A-41-00	HR002_C1	HIPK_1169	BR	0.024	0.024	0.000	0.041	0.023
A-41-00	HR002_C1	HIPK_1170	BR	0.016	0.016	0.000	0.024	0.007
A-41-00	HR002_C1	HIPK_1171	BR	0.015	0.015	0.000	0.017	0.006
A-41-00	HR002_C1	HIPK_1172	BR	0.045	0.045	0.000	0.064	0.028
A-41-00	HR002_C1	HIPK_1173	BR	0.023	0.023	0.000	0.036	0.010
A-41-00	HR002_C1	HIPK_1174	BR	0.065	0.065	0.000	0.125	0.070
A-41-00	HR002_C1	HIPK_1175	BR	0.010	0.010	0.000	0.014	0.003
A-41-00	HR002_C1	HIPK_1176	BR	0.019	0.018	0.001	0.026	0.009
A-41-00	HR002_C1	HIPK_1177	BR	0.004	0.004	0.000	0.007	0.000
A-41-00	HR002_C1	HIPK_1178	BR	0.035	0.035	0.000	0.069	0.016
A-41-00	HR002_C1	HIPK_1179	BR	0.008	0.008	0.000	0.011	0.001
A-41-00	HR002_C1	HIPK_1180	BR	0.009	0.009	0.000	0.011	0.003
A-41-00	HR002_C1	HIPK_1181	BR	0.024	0.024	0.000	0.057	0.021
A-41-00	HR002_C1	HIPK_1182	BR	0.010	0.010	0.000	0.024	0.003
A-41-00	HR002_C1	HIPK_1183	BR	0.020	0.020	0.000	0.030	0.007
A-41-00	HR002_C1	HIPK_1184	BR	0.018	0.018	0.000	0.030	0.015
A-41-00	HR002_C1	HIPK_1185	BR	0.033	0.033	0.000	0.047	0.009
A-41-00	HR002_C1	HIPK_1186	BR	0.013	0.013	0.000	0.020	0.003

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_1187	BR	0.026	0.026	0.000	0.034	0.010
A-41-00	HR002_C1	HIPK_1188	BR	0.013	0.012	0.001	0.016	0.004
A-41-00	HR002_C1	HIPK_1189	BR	0.012	0.012	0.000	0.017	0.007
A-41-00	HR002_C1	HIPK_1190	BR	0.051	0.051	0.000	0.117	0.064
A-41-00	HR002_C1	HIPK_1191	BR	0.011	0.011	0.000	0.016	0.003
A-41-00	HR002_C1	HIPK_1192	BR	0.050	0.036	0.014	0.097	0.037
A-41-00	HR002_C1	HIPK_1193	BR	0.010	0.010	0.000	0.017	0.008
A-41-00	HR002_C1	HIPK_1194	BR	0.008	0.008	0.000	0.013	0.005
A-41-00	HR002_C1	HIPK_1195	BR	0.042	0.042	0.000	0.062	0.023
A-41-00	HR002_C1	HIPK_1196	BR	0.010	0.010	0.000	0.014	0.003
A-41-00	HR001_C2	HIPK_1197	BR	0.013	0.013	0.000	0.036	0.016
A-41-00	HR001_C2	HIPK_1198	BR	0.020	0.018	0.002	0.043	0.008
A-41-00	HR001_C2	HIPK_1199	BR	0.007	0.007	0.000	0.011	0.002
A-41-00	A41IN_C1	HIPK_1200	BR	0.036	0.036	0.000	0.088	0.023
A-41-00	A41IN_C1	HIPK_1201	BR	0.006	0.006	0.000	0.011	0.000
A-41-00	HR001_C3	HIPK_1202	BR	0.011	0.011	0.000	0.027	0.001
A-41-00	HR001_C3	HIPK_1203	BR	0.042	0.042	0.000	0.090	0.033
A-41-00	HR001_C3	HIPK_1204	BR	0.005	0.005	0.000	0.009	0.000
A-41-00	HR001_C3	HIPK_1205	BR	0.005	0.005	0.000	0.008	0.001
A-41-00	HR001_C3	HIPK_1206	BR	0.004	0.004	0.000	0.006	0.000
A-41-00	HR001_C3	HIPK_1207	BR	0.014	0.014	0.000	0.023	0.003
A-41-00	HR001_C3	HIPK_1208	BR	0.005	0.005	0.000	0.007	0.001
A-41-00	HR001_C3	HIPK_1209	BR	0.008	0.008	0.000	0.015	0.004
A-41-00	HR001_C3	HIPK_1210	BR	0.014	0.014	0.000	0.027	0.003
A-41-00	HR002_C1	HIPK_1211	BR	0.003	0.000	0.003	0.006	0.003
A-41-00	HR002_C1	HIPK_1212	BR	0.007	0.000	0.007	0.012	0.010
A-41-00	HR001_C3	HIPK_1213	BR	0.015	0.015	0.000	0.026	0.006
A-41-00	HR002_C1	HIPK_1214	BR	0.014	0.014	0.000	0.030	0.013
A-41-00	HR002_C1	HIPK_1215	BR	0.011	0.011	0.000	0.017	0.007
A-41-00	HR002_C1	HIPK_1216	BR	0.009	0.009	0.000	0.012	0.005
A-41-00	HR002_C1	HIPK_1217	BR	0.035	0.035	0.000	0.062	0.008
A-41-00	HR002_C1	HIPK_1218	BR	0.014	0.014	0.000	0.021	0.001
A-41-00	HR002_C1	HIPK_1219	BR	0.031	0.031	0.000	0.050	0.008
A-41-00	HR002_C1	HIPK_1220	BR	0.024	0.024	0.000	0.046	0.010

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_1221	BR	0.032	0.032	0.000	0.059	0.016
A-41-00	HR002_C1	HIPK_1222	BR	0.015	0.015	0.000	0.027	0.010
A-41-00	HR002_C1	HIPK_1223	BR	0.003	0.003	0.000	0.005	0.001
A-41-00	HR002_C1	HIPK_1224	BR	0.049	0.045	0.004	0.104	0.021
A-41-00	HR002_C1	HIPK_1225	BR	0.014	0.013	0.001	0.023	0.004
A-41-00	HR002_C1	HIPK_1226	BR	0.041	0.041	0.000	0.080	0.024
A-41-00	HR002_C1	HIPK_1227	BR	0.014	0.012	0.002	0.022	0.001
A-41-00	HR002_C1	HIPK_1228	BR	0.032	0.031	0.001	0.059	0.010
A-41-00	HR002_C1	HIPK_1229	BR	0.052	0.052	0.000	0.211	0.092
A-41-00	HR002_C1	HIPK_1230	BR	0.049	0.045	0.004	0.095	0.020
A-41-00	HR002_C1	HIPK_1231	BR	0.008	0.008	0.000	0.012	0.002
A-41-00	HR002_C1	HIPK_1232	BR	0.044	0.044	0.000	0.118	0.055
A-41-00	HR002_C1	HIPK_1233	BR	0.010	0.010	0.000	0.014	0.001
A-41-00	HR002_C1	HIPK_1234	BR	0.007	0.007	0.000	0.011	0.011
A-41-00	HR002_C1	HIPK_1235	BR	0.040	0.034	0.006	0.046	0.015
A-41-00	HR002_C1	HIPK_1236	BR	0.047	0.047	0.000	0.196	0.092
A-41-00	HR002_C1	HIPK_1237	BR	0.009	0.009	0.000	0.013	0.005
A-41-00	HR002_C1	HIPK_1238	BR	0.009	0.009	0.000	0.014	0.010
A-41-00	HR002_C1	HIPK_1239	BR	0.010	0.010	0.000	0.020	0.011
A-41-00	HR002_C1	HIPK_1240	BR	0.060	0.060	0.000	0.169	0.072
A-41-00	HR002_C1	HIPK_1241	BR	0.006	0.006	0.000	0.011	0.005
A-41-00	HR002_C1	HIPK_1242	BR	0.011	0.011	0.000	0.023	0.006
A-41-00	HR002_C1	HIPK_1243	BR	0.013	0.013	0.000	0.027	0.008
A-41-00	HR002_C1	HIPK_1244	BR	0.024	0.024	0.000	0.046	0.014
A-41-00	HR002_C1	HIPK_1245	BR	0.005	0.005	0.000	0.007	0.002
A-41-00	HR002_C1	HIPK_1246	BR	0.023	0.007	0.016	0.030	0.006
A-41-00	HR002_C1	HIPK_1247	BR	0.027	0.027	0.000	0.048	0.009
A-41-00	HR002_C1	HIPK_1248	BR	0.057	0.054	0.003	0.113	0.063
A-41-00	HR002_C1	HIPK_1249	BR	0.010	0.010	0.000	0.018	0.009
A-41-00	HR002_C1	HIPK_1250	BR	0.009	0.009	0.000	1.813	0.934
A-41-00	HR002_C1	HIPK_1251	BR	0.015	0.014	0.001	0.030	0.009
A-41-00	HR002_C1	HIPK_1252	BR	0.068	0.059	0.009	0.401	0.197
A-41-00	HR002_C1	HIPK_1253	BR	0.012	0.012	0.000	0.020	0.006
A-41-00	HR002_C1	HIPK_1254	BR	0.004	0.004	0.000	0.011	0.002

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-41-00	HR002_C1	HIPK_1255	BR	0.054	0.027	0.027	0.626	0.132
A-41-00	HR002_C1	HIPK_1256	BR	0.015	0.015	0.000	0.854	0.351
A-41-00	HR002_C1	HIPK_1257	BR	0.009	0.009	0.000	1.047	0.358
A-41-00	HR002_C1	HIPK_1258	BR	0.011	0.005	0.006	0.022	0.001
A-41-00	HR002_C1	HIPK_1259	BR	0.011	0.011	0.000	0.014	0.004
A-41-00	HR002_C1	HIPK_1260	BR	0.052	0.052	0.000	0.200	0.082
A-41-00	HR002_C1	HIPK_1261	BR	0.025	0.025	0.000	0.062	0.020
A-41-00	HR002_C1	HIPK_1262	BR	0.022	0.020	0.002	0.059	0.016
A-41-00	HR002_C1	HIPK_1263	BR	0.010	0.010	0.000	0.079	0.026
A-41-00	HR002_C1	HIPK_1264	BR	0.022	0.022	0.000	0.085	0.040
A-41-00	HR002_C1	HIPK_1265	BR	0.019	0.019	0.000	0.029	0.003
A-41-00	HR002_C1	HIPK_1266	BR	0.014	0.014	0.000	0.105	0.031
A-41-00	HR002_C1	HIPK_1267	BR	0.025	0.025	0.000	0.484	0.194
A-41-00	HR002_C1	HIPK_1268	BR	0.045	0.045	0.000	0.548	0.200
A-41-00	HR002_C1	HIPK_1269	BR	0.007	0.007	0.000	0.962	0.290
A-41-00	HR002_C1	HIPK_1270	BR	0.019	0.018	0.001	0.035	0.021
A-41-00	HR002_C1	HIPK_1271	BR	0.011	0.011	0.000	0.035	0.019
A-41-00	HR002_C1	HIPK_1272	BR	0.010	0.010	0.000	3.429	1.207
A-41-00	HR002_C1	HIPK_1273	BR	0.007	0.007	0.000	0.310	0.161
A-41-00	HR002_C1	HIPK_1274	BR	0.007	0.007	0.000	0.195	0.108
A-41-00	HR002_C1	HIPK_1275	BR	0.033	0.032	0.001	0.065	0.015
A-41-00	HR002_C1	HIPK_1276	BR	0.010	0.010	0.000	1.317	0.639
A-41-00	HR002_C1	HIPK_1277	BR	0.064	0.062	0.002	2.440	1.097
A-41-00	HR002_C1	HIPK_1278	BR	0.099	0.096	0.003	1.023	0.505
A-41-00	HR002_C1	HIPK_1279	BR	0.021	0.021	0.000	0.213	0.103
A-41-00	HR002_C1	HIPK_1280	BR	0.017	0.017	0.000	0.745	0.449
A-41-00	HR002_C1	HIPK_1281	BR	0.005	0.005	0.000	0.006	0.000
A-41-00	HR002_C1	HIPK_1282	BR	0.020	0.020	0.000	0.325	0.187
A-41-00	HR002_C1	HIPK_1283	BR	0.088	0.066	0.022	0.297	0.116
A-41-00	HR002_C1	HIPK_1284	BR	0.006	0.004	0.002	0.008	0.002
A-41-00	HR002_C1	HIPK_1285	BR	0.007	0.005	0.002	0.429	0.179
A-41-00	HR002_C1	HIPK_1286	BR	0.005	0.005	0.000	0.068	0.022
A-41-00	HR002_C1	HIPK_1287	BR	0.037	0.037	0.000	0.166	0.036
A-41-00	HR002_C1	HIPK_1288	BR	0.026	0.024	0.002	1.108	0.326

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	PennHills_A-42	HIPK_1289	BR	0.033	0.030	0.003	0.809	0.079
A-42-00	PennHills_A-42	HIPK_1290	BR	0.011	0.011	0.000	0.025	0.001
A-42-00	PennHills_A-42	HIPK_1291	BR	0.012	0.010	0.002	0.109	0.023
A-42-00	PennHills_A-42	HIPK_1292	BR	0.004	0.004	0.000	2.518	0.078
A-42-00	PennHills_A-42	HIPK_1293	BR	0.003	0.003	0.000	0.004	0.002
A-42-00	PennHills_A-42	HIPK_1294	BR	0.162	0.162	0.000	0.243	0.093
A-42-00	PennHills_A-42	HIPK_1295	BR	0.034	0.029	0.005	0.052	0.003
A-42-00	PennHills_A-42	HIPK_1296	BR	0.011	0.011	0.000	0.023	0.014
A-42-00	PennHills_A-42	HIPK_1297	BR	0.003	0.003	0.000	0.014	0.002
A-42-00	PennHills_A-42	HIPK_1298	BR	0.094	0.094	0.000	1.206	0.113
A-42-00	PennHills_A-42	HIPK_1299	BR	0.008	0.008	0.000	0.018	0.004
A-42-00	PennHills_A-42	HIPK_1300	BR	0.011	0.011	0.000	0.089	0.016
A-42-00	PennHills_A-42	HIPK_1301	BR	0.035	0.035	0.000	0.042	0.019
A-42-00	PennHills_A-42	HIPK_1302	BR	0.006	0.004	0.002	0.449	0.105
A-42-00	PennHills_A-42	HIPK_1303	BR	0.007	0.007	0.000	0.020	0.006
A-42-00	PennHills_A-42	HIPK_1304	BR	0.009	0.006	0.003	0.031	0.020
A-42-00	PennHills_A-42	HIPK_1305	BR	0.013	0.010	0.003	0.036	0.018
A-42-00	PennHills_A-42	HIPK_1306	BR	0.024	0.019	0.005	0.056	0.005
A-42-00	PennHills_A-42	HIPK_1307	BR	0.089	0.089	0.000	0.306	0.117
A-42-00	PennHills_A-42	HIPK_1308	BR	0.072	0.072	0.000	0.366	0.032
A-42-00	PennHills_A-42	HIPK_1309	BR	0.039	0.039	0.000	0.045	0.024
A-42-00	PennHills_A-42	HIPK_1310	BR	0.008	0.004	0.004	0.026	0.003
A-42-00	PennHills_A-42	HIPK_1311	BR	0.007	0.005	0.002	0.033	0.021
A-42-00	PennHills_A-42	HIPK_1312	BR	0.026	0.026	0.000	0.037	0.007
A-42-00	PennHills_A-42	HIPK_1313	BR	0.024	0.024	0.000	0.059	0.010
A-42-00	PennHills_A-42	HIPK_1314	BR	0.009	0.005	0.004	0.022	0.001
A-42-00	PennHills_A-42	HIPK_1315	BR	0.019	0.014	0.005	0.025	0.006
A-42-00	PennHills_A-42	HIPK_1316	BR	0.013	0.013	0.000	0.021	0.007
A-42-00	PennHills_A-42	HIPK_1317	BR	0.018	0.018	0.000	1.847	0.575
A-42-00	PennHills_A-42	HIPK_1318	BR	0.006	0.004	0.002	0.019	0.001
A-42-00	PennHills_A-42	HIPK_1319	BR	0.007	0.007	0.000	0.076	0.030
A-42-00	PennHills_A-42	HIPK_1320	BR	0.018	0.018	0.000	0.030	0.018
A-42-00	PennHills_A-42	HIPK_1321	BR	0.007	0.007	0.000	0.009	0.001
A-42-00	PennHills_A-42	HIPK_1322	BR	0.005	0.003	0.002	0.095	0.041

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	PennHills_A-42	HIPK_1323	BR	0.007	0.007	0.000	0.043	0.015
A-42-00	PennHills_A-42	HIPK_1324	BR	0.048	0.048	0.000	0.091	0.057
A-42-00	PennHills_A-42	HIPK_1325	BR	0.006	0.004	0.002	0.013	0.000
A-42-00	PennHills_A-42	HIPK_1326	BR	0.008	0.007	0.001	0.083	0.039
A-42-00	INT_A42_C1	HIPK_1327	BR	0.076	0.019	0.057	0.140	0.059
A-42-00	INT_A42_C1	HIPK_1328	BR	0.015	0.004	0.011	0.027	0.007
A-42-00	INT_A42_C1	HIPK_1329	BR	0.025	0.018	0.007	0.065	0.039
A-42-00	INT_A42_C1	HIPK_1330	BR	0.019	0.004	0.015	3.169	0.398
A-42-00	INT_A42_C1	HIPK_1331	BR	0.013	0.007	0.006	0.031	0.015
A-42-00	INT_A42_C1	HIPK_1332	BR	0.060	0.030	0.030	0.176	0.090
A-42-00	INT_A42_C1	HIPK_1333	BR	0.038	0.024	0.014	0.064	0.013
A-42-00	A4200__-POC-L-01_C1	HIPK_1334	BR	0.048	0.015	0.033	0.134	0.057
A-42-00	A4200__-POC-L-01_C1	HIPK_1335	BR	0.013	0.004	0.009	0.205	0.041
A-42-00	A4200__-POC-L-01_C1	HIPK_1336	BR	0.009	0.006	0.003	0.063	0.019
A-42-00	A4200__-POC-L-01_C1	HIPK_1337	BR	0.026	0.015	0.011	0.400	0.019
A-42-00	A4200__-POC-L-01_C1	HIPK_1338	BR	0.072	0.072	0.000	3.185	1.332
A-42-00	A4200__-POC-L-01_C1	HIPK_1339	BR	0.009	0.009	0.000	1.391	0.539
A-42-00	A4200__-POC-L-01_C1	HIPK_1340	BR	0.011	0.011	0.000	0.464	0.269
A-42-00	A4200__-POC-L-01_C1	HIPK_1341	BR	0.006	0.006	0.000	0.019	0.010
A-42-00	A4200__-POC-L-01_C1	HIPK_1342	BR	0.005	0.005	0.000	0.028	0.011
A-42-00	A4200__-POC-L-01_C1	HIPK_1343	BR	0.026	0.026	0.000	0.453	0.136
A-42-00	A4200__-POC-L-01_C1	HIPK_1344	BR	0.010	0.010	0.000	0.229	0.018
A-42-00	A4200__-POC-L-01_C1	HIPK_1345	BR	0.059	0.059	0.000	3.330	1.564
A-42-00	A4200__-POC-L-01_C1	HIPK_1346	BR	0.097	0.043	0.054	1.033	0.463
A-42-00	A4200__-POC-L-01_C1	HIPK_1347	BR	0.049	0.036	0.013	0.085	0.013
A-42-00	A4200__-POC-L-01_C1	HIPK_1348	BR	0.046	0.046	0.000	2.325	0.230
A-42-00	A4200__-POC-L-01_C1	HIPK_1349	BR	0.188	0.165	0.023	11.956	1.968
A-42-00	A4200__-POC-L-01_C1	HIPK_1350	BR	0.015	0.010	0.005	0.064	0.004
A-42-00	A4200__-POC-L-01_C1	HIPK_1351	BR	0.092	0.037	0.055	0.391	0.091
A-42-00	A4200__-POC-L-01_C5	HIPK_1352	BR	0.238	0.048	0.190	0.433	0.076
A-42-00	A4200__-POC-L-02_C8	HIPK_1353	BR	0.035	0.028	0.007	0.068	0.020
A-42-00	A4200__-POC-L-02_C8	HIPK_1354	BR	0.005	0.005	0.000	0.012	0.004
A-42-00	A4200__-POC-L-02_C8	HIPK_1355	BR	0.004	0.004	0.000	0.005	0.001
A-42-00	A4200__-POC-L-02_C8	HIPK_1356	BR	0.060	0.041	0.019	1.372	0.158

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-02_C8	HIPK_1357	BR	0.026	0.020	0.006	6.995	0.939
A-42-00	A4200__-POC-L-02_C8	HIPK_1358	BR	0.014	0.009	0.005	0.018	0.001
A-42-00	A4200__-POC-L-02_C8	HIPK_1359	BR	0.011	0.005	0.006	0.015	0.001
A-42-00	A4200__-POC-L-02_C8	HIPK_1360	BR	0.016	0.009	0.007	0.089	0.039
A-42-00	A4200__-POC-L-02_C8	HIPK_1361	BR	0.008	0.006	0.002	0.017	0.010
A-42-00	A4200__-POC-L-02_C8	HIPK_1362	BR	0.004	0.003	0.001	0.011	0.007
A-42-00	A4200__-POC-L-02_C8	HIPK_1363	BR	0.004	0.004	0.000	0.039	0.014
A-42-00	A4200__-POC-L-02_C8	HIPK_1364	BR	0.012	0.009	0.003	0.072	0.032
A-42-00	A4200__-POC-L-02_C8	HIPK_1365	BR	0.010	0.010	0.000	0.031	0.005
A-42-00	A4200__-POC-L-02_C8	HIPK_1366	BR	0.036	0.031	0.005	0.053	0.010
A-42-00	A4200__-POC-L-02_C8	HIPK_1367	BR	0.008	0.007	0.001	0.023	0.009
A-42-00	A4200__-POC-L-02_C8	HIPK_1368	BR	0.028	0.023	0.005	0.755	0.274
A-42-00	A4200__-POC-L-02_C8	HIPK_1369	BR	0.110	0.094	0.016	1.714	0.627
A-42-00	A4200__-POC-L-02_C8	HIPK_1370	BR	0.004	0.003	0.001	0.005	0.001
A-42-00	A4200__-POC-L-02_C8	HIPK_1371	BR	0.005	0.004	0.001	0.020	0.002
A-42-00	A4200__-POC-L-02_C8	HIPK_1372	BR	0.007	0.004	0.003	0.015	0.003
A-42-00	A4200__-POC-L-02_C8	HIPK_1373	BR	0.018	0.014	0.004	0.078	0.034
A-42-00	A4200__-POC-L-01_C2	HIPK_1374	BR	0.014	0.008	0.006	0.039	0.012
A-42-00	A4200__-POC-L-01_C2	HIPK_1375	BR	0.006	0.004	0.002	0.016	0.002
A-42-00	A4200__-POC-L-01_C2	HIPK_1376	BR	0.005	0.004	0.001	0.008	0.005
A-42-00	A4200__-POC-L-01_C2	HIPK_1377	BR	0.006	0.006	0.000	0.014	0.008
A-42-00	A4200__-POC-L-01_C2	HIPK_1378	BR	0.009	0.009	0.000	0.173	0.068
A-42-00	A4200__-POC-L-01_C2	HIPK_1379	BR	0.010	0.010	0.000	1.548	0.376
A-42-00	A4200__-POC-L-01_C2	HIPK_1380	BR	0.009	0.009	0.000	0.089	0.037
A-42-00	A4200__-POC-L-01_C2	HIPK_1381	BR	0.004	0.002	0.002	0.417	0.186
A-42-00	A4200__-POC-L-01_C2	HIPK_1382	BR	0.004	0.001	0.003	0.023	0.005
A-42-00	A4200__-POC-L-01_C2	HIPK_1383	BR	0.008	0.005	0.003	0.060	0.030
A-42-00	A4200__-POC-L-01_C2	HIPK_1384	BR	0.030	0.014	0.016	0.206	0.062
A-42-00	A4200__-POC-L-01_C2	HIPK_1385	BR	0.017	0.011	0.006	0.067	0.020
A-42-00	A4200__-POC-L-01_C2	HIPK_1386	BR	0.007	0.005	0.002	0.057	0.017
A-42-00	A4200__-POC-L-01_C2	HIPK_1387	BR	0.009	0.009	0.000	0.041	0.025
A-42-00	A4200__-POC-L-01_C2	HIPK_1388	BR	0.006	0.005	0.001	0.031	0.007
A-42-00	A4200__-POC-L-01_C2	HIPK_1389	BR	0.019	0.019	0.000	0.770	0.406
A-42-00	A4200__-POC-L-01_C2	HIPK_1390	BR	0.012	0.008	0.004	0.020	0.007

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C2	HIPK_1391	BR	0.036	0.028	0.008	2.481	0.261
A-42-00	A4200__-POC-L-01_C2	HIPK_1392	BR	0.031	0.021	0.010	0.292	0.158
A-42-00	A4200__-POC-L-01_C2	HIPK_1393	BR	0.006	0.006	0.000	0.117	0.048
A-42-00	A4200__-POC-L-01_C2	HIPK_1394	BR	0.007	0.007	0.000	0.062	0.015
A-42-00	A4200__-POC-L-01_C2	HIPK_1395	BR	0.015	0.015	0.000	0.064	0.009
A-42-00	A4200__-POC-L-01_C2	HIPK_1396	BR	0.009	0.008	0.001	0.104	0.029
A-42-00	A4200__-POC-L-01_C2	HIPK_1397	BR	0.005	0.002	0.003	0.009	0.002
A-42-00	A4200__-POC-L-01_C2	HIPK_1398	BR	0.044	0.034	0.010	0.082	0.027
A-42-00	A4200__-POC-L-01_C2	HIPK_1399	BR	0.010	0.009	0.001	0.040	0.012
A-42-00	A4200__-POC-L-01_C2	HIPK_1400	BR	0.060	0.058	0.002	0.243	0.091
A-42-00	A4200__-POC-L-02_C1	HIPK_1401	BR	0.065	0.065	0.000	12.105	0.758
A-42-00	A4200__-POC-L-02_C1	HIPK_1402	BR	0.051	0.051	0.000	0.158	0.098
A-42-00	A4200__-POC-L-02_C2	HIPK_1403	BR	0.074	0.000	0.074	0.142	0.061
A-42-00	A4200__-POC-L-02_C2	HIPK_1404	BR	0.065	0.000	0.065	0.109	0.025
A-42-00	A4200__-POC-L-02_C2	HIPK_1405	BR	0.031	0.019	0.012	0.037	0.007
A-42-00	A4200__-POC-L-02_C2	HIPK_1406	BR	0.015	0.009	0.006	0.030	0.010
A-42-00	A4200__-POC-L-02_C2	HIPK_1407	BR	0.036	0.027	0.009	0.039	0.028
A-42-00	A4200__-POC-L-02_C3	HIPK_1408	BR	0.009	0.004	0.005	0.010	0.001
A-42-00	A4200__-POC-L-02_C3	HIPK_1409	BR	0.049	0.049	0.000	0.094	0.053
A-42-00	A4200__-POC-L-02_C3	HIPK_1410	BR	0.006	0.005	0.001	0.007	0.003
A-42-00	A4200__-POC-L-02_C3	HIPK_1411	BR	0.009	0.009	0.000	0.085	0.007
A-42-00	A4200__-POC-L-02_C3	HIPK_1412	BR	0.044	0.044	0.000	0.171	0.068
A-42-00	A4200__-POC-L-02_C3	HIPK_1413	BR	0.023	0.023	0.000	0.027	0.027
A-42-00	A4200__-POC-L-02_C3	HIPK_1414	BR	0.025	0.024	0.001	0.052	0.014
A-42-00	A4200__-POC-L-02_C3	HIPK_1415	BR	0.057	0.057	0.000	0.292	0.118
A-42-00	A4200__-POC-L-02_C3	HIPK_1416	BR	0.126	0.126	0.000	0.163	0.101
A-42-00	A4200__-POC-L-02_C3	HIPK_1417	BR	0.029	0.009	0.020	0.032	0.002
A-42-00	A4200__-POC-L-02_C3	HIPK_1418	BR	0.010	0.010	0.000	0.014	0.007
A-42-00	A4200__-POC-L-02_C3	HIPK_1419	BR	0.022	0.015	0.007	0.033	0.007
A-42-00	A4200__-POC-L-02_C3	HIPK_1420	BR	0.035	0.030	0.005	0.134	0.039
A-42-00	A4200__-POC-L-02_C3	HIPK_1421	BR	0.032	0.030	0.002	0.066	0.044
A-42-00	A4200__-POC-L-02_C3	HIPK_1422	BR	0.035	0.026	0.009	0.114	0.051
A-42-00	A4200__-POC-L-02_C3	HIPK_1423	BR	0.068	0.048	0.020	0.172	0.037
A-42-00	A4200__-POC-L-02_C3	HIPK_1424	BR	0.058	0.058	0.000	0.076	0.035

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-02_C3	HIPK_1425	BR	0.087	0.047	0.040	0.202	0.029
A-42-00	A4200__-POC-L-02_C3	HIPK_1426	BR	0.091	0.048	0.043	0.125	0.006
A-42-00	A4200__-POC-L-02_C3	HIPK_1427	BR	0.015	0.008	0.007	0.018	0.004
A-42-00	A4200__-POC-L-02_C3	HIPK_1428	BR	0.023	0.021	0.002	0.044	0.017
A-42-00	A4200__-POC-L-02_C3	HIPK_1429	BR	0.019	0.011	0.008	0.941	0.045
A-42-00	A4200__-POC-L-02_C3	HIPK_1430	BR	0.010	0.010	0.000	0.014	0.006
A-42-00	A4200__-POC-L-02_C3	HIPK_1431	BR	0.022	0.011	0.011	0.046	0.006
A-42-00	A4200__-POC-L-02_C3	HIPK_1432	BR	0.009	0.002	0.007	0.014	0.003
A-42-00	A4200__-POC-L-02_C3	HIPK_1433	BR	0.010	0.010	0.000	15.689	2.792
A-42-00	A4200__-POC-L-02_C3	HIPK_1434	BR	0.076	0.054	0.022	20.228	3.297
A-42-00	A4200__-POC-L-02_C3	HIPK_1435	BR	0.015	0.015	0.000	0.016	0.004
A-42-00	A4200__-POC-L-02_C3	HIPK_1436	BR	0.009	0.004	0.005	0.019	0.007
A-42-00	A4200__-POC-L-02_C3	HIPK_1437	BR	0.001	0.001	0.000	0.002	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_1438	BR	0.002	0.000	0.002	0.003	0.000
A-42-00	A4200__-MM_-L-04_C10	HIPK_1439	BR	0.003	0.001	0.002	0.005	0.002
A-42-00	A4200__-MM_-L-04_C10	HIPK_1440	BR	0.004	0.004	0.000	0.012	0.002
A-42-00	A4200__-MM_-L-04_C10	HIPK_1441	BR	0.005	0.005	0.000	0.008	0.004
A-42-00	A4200__-MM_-L-04_C10	HIPK_1442	BR	0.122	0.027	0.095	0.218	0.065
A-42-00	A4200__-MM_-L-04_C10	HIPK_1443	BR	0.006	0.006	0.000	0.010	0.003
A-42-00	A4200__-MM_-L-04_C10	HIPK_1444	BR	0.003	0.003	0.000	0.006	0.003
A-42-00	A4200__-MM_-L-04_C10	HIPK_1445	BR	0.024	0.024	0.000	0.082	0.013
A-42-00	A4200__-MM_-L-04_C10	HIPK_1446	BR	0.005	0.004	0.001	0.007	0.002
A-42-00	A4200__-MM_-L-04_C10	HIPK_1447	BR	0.005	0.001	0.004	0.006	0.001
A-42-00	A4200__-MM_-L-04_C10	HIPK_1448	BR	0.007	0.007	0.000	0.010	0.006
A-42-00	A4200__-MM_-L-04_C10	HIPK_1449	BR	0.011	0.004	0.007	0.016	0.005
A-42-00	A4200__-MM_-L-04_C10	HIPK_1450	BR	0.018	0.009	0.009	0.019	0.008
A-42-00	A4200__-MM_-L-04_C10	HIPK_1451	BR	0.010	0.008	0.002	0.139	0.027
A-42-00	A4200__-MM_-L-04_C10	HIPK_1452	BR	0.004	0.004	0.000	0.006	0.000
A-42-00	A4200__-MM_-L-04_C10	HIPK_1453	BR	0.014	0.008	0.006	0.017	0.013
A-42-00	A4200__-MM_-L-04_C10	HIPK_1454	BR	0.003	0.003	0.000	0.004	0.000
A-42-00	A4200__-MM_-L-04_C10	HIPK_1455	BR	0.002	0.002	0.000	0.003	0.000
A-42-00	A4200__-MM_-L-04_C10	HIPK_1456	BR	0.161	0.044	0.117	0.189	0.038
A-42-00	A4200__-MM_-L-04_C10	HIPK_1457	BR	0.014	0.010	0.004	0.018	0.009
A-42-00	A4200__-MM_-L-04_C11	HIPK_1458	BR	0.007	0.000	0.007	0.022	0.002

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-04_C11	HIPK_1459	BR	0.004	0.000	0.004	0.015	0.009
A-42-00	A4200__-MM_-L-04_C11	HIPK_1460	BR	0.038	0.027	0.011	0.050	0.006
A-42-00	A4200__-MM_-L-04_C11	HIPK_1461	BR	0.009	0.008	0.001	0.061	0.013
A-42-00	A4200__-MM_-L-04_C11	HIPK_1462	BR	0.004	0.004	0.000	0.005	0.001
A-42-00	A4200__-MM_-L-04_C11	HIPK_1463	BR	0.004	0.003	0.001	0.015	0.006
A-42-00	A4200__-MM_-L-04_C11	HIPK_1464	BR	0.014	0.012	0.002	0.575	0.170
A-42-00	A4200__-MM_-L-04_C11	HIPK_1465	BR	0.005	0.005	0.000	0.089	0.022
A-42-00	A4200__-MM_-L-04_C11	HIPK_1466	BR	0.015	0.015	0.000	0.028	0.013
A-42-00	A4200__-MM_-L-04_C11	HIPK_1467	BR	0.006	0.006	0.000	0.015	0.006
A-42-00	A4200__-POC-L-02_C4	HIPK_1468	BR	0.023	0.023	0.000	0.047	0.021
A-42-00	A4200__-POC-L-02_C4	HIPK_1469	BR	0.006	0.006	0.000	0.041	0.023
A-42-00	A4200__-POC-L-02_C4	HIPK_1470	BR	0.009	0.009	0.000	0.040	0.012
A-42-00	A4200__-POC-L-02_C4	HIPK_1471	BR	0.010	0.008	0.002	0.038	0.021
A-42-00	A4200__-POC-L-02_C4	HIPK_1472	BR	0.005	0.005	0.000	0.287	0.094
A-42-00	A4200__-POC-L-02_C4	HIPK_1473	BR	0.123	0.121	0.002	0.491	0.179
A-42-00	A4200__-POC-L-02_C4	HIPK_1474	BR	0.058	0.049	0.009	0.119	0.025
A-42-00	A4200__-POC-L-02_C4	HIPK_1475	BR	0.012	0.012	0.000	0.020	0.008
A-42-00	A4200__-POC-L-02_C4	HIPK_1476	BR	0.005	0.003	0.002	0.012	0.002
A-42-00	A4200__-POC-L-02_C4	HIPK_1477	BR	0.018	0.012	0.006	0.892	0.296
A-42-00	A4200__-POC-L-02_C4	HIPK_1478	BR	0.011	0.008	0.003	0.070	0.035
A-42-00	A4200__-POC-L-02_C4	HIPK_1479	BR	0.008	0.004	0.004	0.012	0.002
A-42-00	A4200__-POC-L-02_C4	HIPK_1480	BR	0.006	0.004	0.002	0.012	0.006
A-42-00	A4200__-POC-L-02_C4	HIPK_1481	BR	0.007	0.005	0.002	0.024	0.017
A-42-00	A4200__-POC-L-02_C4	HIPK_1482	BR	0.012	0.011	0.001	0.015	0.006
A-42-00	A4200__-POC-L-02_C4	HIPK_1483	BR	0.007	0.003	0.004	0.010	0.004
A-42-00	A4200__-POC-L-02_C4	HIPK_1484	BR	0.006	0.001	0.005	0.020	0.007
A-42-00	A4200__-POC-L-02_C4	HIPK_1485	BR	0.007	0.004	0.003	0.294	0.086
A-42-00	A4200__-POC-L-02_C4	HIPK_1486	BR	0.007	0.003	0.004	0.010	0.003
A-42-00	A4200__-POC-L-02_C5	HIPK_1487	BR	0.015	0.015	0.000	0.030	0.014
A-42-00	A4200__-POC-L-02_C6	HIPK_1488	BR	0.034	0.021	0.013	0.078	0.006
A-42-00	A4200__-POC-L-02_C7	HIPK_1489	BR	0.006	0.006	0.000	0.008	0.000
A-42-00	A4200__-POC-L-02_C7	HIPK_1490	BR	0.013	0.008	0.005	0.859	0.271
A-42-00	A4200__-POC-L-02_C7	HIPK_1491	BR	0.006	0.004	0.002	0.024	0.007
A-42-00	A4200__-MM_-L-04_C2	HIPK_1492	BR	0.010	0.008	0.002	0.065	0.039

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-04_C2	HIPK_1493	BR	0.006	0.006	0.000	0.012	0.006
A-42-00	A4200__-MM_-L-04_C2	HIPK_1494	BR	0.014	0.010	0.004	0.016	0.008
A-42-00	A4200__-MM_-L-04_C2	HIPK_1495	BR	0.007	0.002	0.005	0.012	0.003
A-42-00	A4200__-MM_-L-04_C2	HIPK_1496	BR	0.009	0.007	0.002	0.011	0.005
A-42-00	A4200__-MM_-L-04_C2	HIPK_1497	BR	0.014	0.009	0.005	0.023	0.002
A-42-00	A4200__-MM_-L-04_C2	HIPK_1498	BR	0.006	0.005	0.001	0.011	0.005
A-42-00	A4200__-MM_-L-04_C2	HIPK_1499	BR	0.024	0.016	0.008	0.041	0.001
A-42-00	A4200__-MM_-L-04_C2	HIPK_1500	BR	0.010	0.006	0.004	0.015	0.002
A-42-00	A4200__-MM_-L-04_C2	HIPK_1501	BR	0.004	0.003	0.001	0.008	0.001
A-42-00	A4200__-MM_-L-04_C2	HIPK_1502	BR	0.017	0.008	0.009	0.031	0.010
A-42-00	A4200__-MM_-L-04_C2	HIPK_1503	BR	0.010	0.005	0.005	0.017	0.007
A-42-00	A4200__-MM_-L-04_C2	HIPK_1504	BR	0.017	0.013	0.004	0.026	0.014
A-42-00	A4200__-MM_-L-04_C4	HIPK_1505	BR	0.013	0.013	0.000	0.015	0.009
A-42-00	A4200__-MM_-L-04_C4	HIPK_1506	BR	0.003	0.001	0.002	0.006	0.002
A-42-00	A4200__-MM_-L-04_C4	HIPK_1507	BR	0.009	0.005	0.004	0.015	0.004
A-42-00	A4200__-MM_-L-04_C4	HIPK_1508	BR	0.022	0.017	0.005	0.029	0.017
A-42-00	A4200__-MM_-L-04_C4	HIPK_1509	BR	0.007	0.004	0.003	0.013	0.001
A-42-00	A4200__-MM_-L-04_C4	HIPK_1510	BR	0.094	0.042	0.052	0.186	0.045
A-42-00	A4200__-MM_-L-04_C4	HIPK_1511	BR	0.005	0.005	0.000	0.007	0.002
A-42-00	A4200__-MM_-L-04_C4	HIPK_1512	BR	0.006	0.003	0.003	0.013	0.000
A-42-00	A4200__-MM_-L-04_C4	HIPK_1513	BR	0.012	0.009	0.003	0.013	0.005
A-42-00	A4200__-MM_-L-04_C4	HIPK_1514	BR	0.005	0.004	0.001	0.010	0.005
A-42-00	A4200__-MM_-L-04_C4	HIPK_1515	BR	0.007	0.004	0.003	0.012	0.001
A-42-00	A4200__-MM_-L-04_C3	HIPK_1516	BR	0.039	0.036	0.003	0.043	0.013
A-42-00	A4200__-MM_-L-04_C4	HIPK_1517	BR	0.017	0.014	0.003	0.027	0.011
A-42-00	A4200__-MM_-L-04_C3	HIPK_1518	BR	0.073	0.043	0.030	0.150	0.071
A-42-00	A4200__-MM_-L-04_C3	HIPK_1519	BR	0.026	0.014	0.012	0.037	0.016
A-42-00	A4200__-MM_-L-04_C3	HIPK_1520	BR	0.005	0.003	0.002	0.008	0.001
A-42-00	A4200__-MM_-L-04_C3	HIPK_1521	BR	0.033	0.011	0.022	0.048	0.013
A-42-00	A4200__-MM_-L-04_C3	HIPK_1522	BR	0.031	0.016	0.015	0.057	0.018
A-42-00	A4200__-MM_-L-04_C3	HIPK_1523	BR	0.009	0.006	0.003	0.012	0.005
A-42-00	A4200__-MM_-L-04_C3	HIPK_1524	BR	0.057	0.042	0.015	0.090	0.053
A-42-00	A4200__-MM_-L-04_C3	HIPK_1525	BR	0.007	0.007	0.000	0.009	0.004
A-42-00	A4200__-MM_-L-04_C3	HIPK_1526	BR	0.011	0.009	0.002	0.019	0.008

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-04_C3	HIPK_1527	BR	0.007	0.006	0.001	0.008	0.002
A-42-00	A4200__-MM_-L-04_C3	HIPK_1528	BR	0.011	0.005	0.006	0.019	0.004
A-42-00	A4200__-MM_-L-04_C3	HIPK_1529	BR	0.017	0.008	0.009	0.025	0.003
A-42-00	A4200__-MM_-L-04_C3	HIPK_1530	BR	0.015	0.006	0.009	0.019	0.003
A-42-00	A4200__-MM_-L-04_C3	HIPK_1531	BR	0.006	0.004	0.002	0.008	0.002
A-42-00	A4200__-POC-L-01_C5	HIPK_1532	BR	0.010	0.004	0.006	0.015	0.002
A-42-00	A4200__-POC-L-01_C5	HIPK_1533	BR	0.053	0.029	0.024	0.075	0.027
A-42-00	A4200__-POC-L-01_C5	HIPK_1534	BR	0.018	0.005	0.013	0.032	0.005
A-42-00	A4200__-POC-L-01_C5	HIPK_1535	BR	0.046	0.019	0.027	0.051	0.007
A-42-00	A4200__-POC-L-01_C5	HIPK_1536	BR	0.033	0.014	0.019	0.048	0.008
A-42-00	A4200__-POC-L-01_C5	HIPK_1537	BR	0.038	0.018	0.020	0.063	0.014
A-42-00	A4200__-POC-L-01_C5	HIPK_1538	BR	0.027	0.011	0.016	0.033	0.009
A-42-00	A4200__-POC-L-01_C5	HIPK_1539	BR	0.038	0.008	0.030	0.045	0.002
A-42-00	A4200__-POC-L-01_C5	HIPK_1540	BR	0.010	0.003	0.007	0.017	0.001
A-42-00	A4200__-POC-L-01_C5	HIPK_1541	BR	0.043	0.013	0.030	0.046	0.005
A-42-00	A4200__-POC-L-01_C5	HIPK_1542	BR	0.056	0.033	0.023	0.160	0.046
A-42-00	A4200__-POC-L-01_C5	HIPK_1543	BR	0.041	0.015	0.026	0.055	0.006
A-42-00	A4200__-POC-L-01_C5	HIPK_1544	BR	0.065	0.024	0.041	0.084	0.022
A-42-00	A4200__-POC-L-01_C5	HIPK_1545	BR	0.090	0.028	0.062	0.128	0.038
A-42-00	A4200__-POC-L-01_C5	HIPK_1546	BR	0.416	0.164	0.252	1.122	0.299
A-42-00	A4200__-POC-L-01_C5	HIPK_1547	BR	0.020	0.008	0.012	0.047	0.015
A-42-00	A4200__-POC-L-01_C5	HIPK_1548	BR	0.035	0.021	0.014	0.066	0.015
A-42-00	A4200__-POC-L-01_C5	HIPK_1549	BR	0.008	0.005	0.003	0.016	0.007
A-42-00	A4200__-POC-L-01_C5	HIPK_1550	BR	0.054	0.026	0.028	0.125	0.032
A-42-00	A4200__-POC-L-01_C5	HIPK_1551	BR	0.055	0.034	0.021	0.091	0.011
A-42-00	A4200__-POC-L-01_C5	HIPK_1552	BR	0.011	0.004	0.007	0.014	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_1553	BR	0.043	0.030	0.013	0.062	0.024
A-42-00	A4200__-POC-L-01_C5	HIPK_1554	BR	0.012	0.005	0.007	0.015	0.003
A-42-00	A4200__-POC-L-01_C5	HIPK_1555	BR	0.079	0.011	0.068	0.152	0.010
A-42-00	A4200__-POC-L-01_C5	HIPK_1556	BR	0.018	0.007	0.011	0.025	0.004
A-42-00	A4200__-POC-L-01_C5	HIPK_1557	BR	0.070	0.043	0.027	0.107	0.032
A-42-00	A4200__-POC-L-01_C5	HIPK_1558	BR	0.011	0.002	0.009	0.021	0.003
A-42-00	A4200__-POC-L-01_C5	HIPK_1559	BR	0.091	0.034	0.057	0.216	0.075
A-42-00	A4200__-POC-L-01_C5	HIPK_1560	BR	0.012	0.005	0.007	0.021	0.006

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C5	HIPK_1561	BR	0.018	0.007	0.011	0.030	0.007
A-42-00	A4200__-POC-L-01_C5	HIPK_1562	BR	0.062	0.045	0.017	0.125	0.018
A-42-00	A4200__-POC-L-01_C5	HIPK_1563	BR	0.029	0.021	0.008	0.051	0.016
A-42-00	A4200__-POC-L-01_C5	HIPK_1564	BR	0.010	0.008	0.002	0.015	0.005
A-42-00	A4200__-POC-L-01_C5	HIPK_1565	BR	0.043	0.034	0.009	0.088	0.038
A-42-00	A4200__-POC-L-01_C5	HIPK_1566	BR	0.025	0.022	0.003	0.043	0.022
A-42-00	A4200__-POC-L-01_C5	HIPK_1567	BR	0.048	0.026	0.022	0.097	0.040
A-42-00	A4200__-POC-L-01_C5	HIPK_1568	BR	0.045	0.035	0.010	0.083	0.025
A-42-00	A4200__-POC-L-01_C5	HIPK_1569	BR	0.006	0.001	0.005	0.010	0.002
A-42-00	A4200__-POC-L-01_C5	HIPK_1570	BR	0.007	0.003	0.004	0.011	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_1571	BR	0.072	0.054	0.018	0.132	0.041
A-42-00	A4200__-POC-L-01_C5	HIPK_1572	BR	0.077	0.041	0.036	0.196	0.080
A-42-00	A4200__-POC-L-01_C5	HIPK_1573	BR	0.007	0.006	0.001	0.011	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_1574	BR	0.048	0.024	0.024	0.075	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_1575	BR	0.039	0.016	0.023	0.068	0.016
A-42-00	A4200__-POC-L-01_C5	HIPK_1576	BR	0.049	0.018	0.031	0.061	0.009
A-42-00	A4200__-POC-L-01_C5	HIPK_1577	BR	0.059	0.037	0.022	0.111	0.037
A-42-00	A4200__-POC-L-01_C5	HIPK_1578	BR	0.032	0.002	0.030	0.041	0.003
A-42-00	A4200__-POC-L-01_C5	HIPK_1579	BR	0.138	0.063	0.075	0.366	0.080
A-42-00	A4200__-POC-L-01_C5	HIPK_1580	BR	0.006	0.002	0.004	0.011	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_1581	BR	0.057	0.017	0.040	0.069	0.009
A-42-00	A4200__-POC-L-01_C5	HIPK_1582	BR	0.013	0.008	0.005	0.017	0.002
A-42-00	A4200__-POC-L-01_C5	HIPK_1583	BR	0.008	0.007	0.001	0.013	0.004
A-42-00	A4200__-POC-L-01_C5	HIPK_1584	BR	0.024	0.013	0.011	0.033	0.013
A-42-00	A4200__-POC-L-01_C5	HIPK_1585	BR	0.010	0.004	0.006	0.015	0.005
A-42-00	A4200__-POC-L-01_C5	HIPK_1586	BR	0.069	0.024	0.045	0.115	0.011
A-42-00	A4200__-POC-L-01_C5	HIPK_1587	BR	0.053	0.026	0.027	0.152	0.040
A-42-00	A4200__-POC-L-01_C3	HIPK_1588	BR	0.125	0.077	0.048	0.290	0.049
A-42-00	A4200__-POC-L-01_C5	HIPK_1589	BR	0.085	0.044	0.041	0.233	0.070
A-42-00	A4200__-POC-L-01_C4	HIPK_1590	BR	0.003	0.001	0.002	0.005	0.000
A-42-00	A4200__-POC-L-01_C4	HIPK_1591	BR	0.015	0.015	0.000	0.026	0.008
A-42-00	A4200__-POC-L-01_C4	HIPK_1592	BR	0.003	0.002	0.001	0.006	0.001
A-42-00	A4200__-POC-L-01_C4	HIPK_1593	BR	0.011	0.006	0.005	0.017	0.001
A-42-00	A4200__-POC-L-01_C4	HIPK_1594	BR	0.011	0.008	0.003	0.020	0.005

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C4	HIPK_1595	BR	0.028	0.015	0.013	0.038	0.012
A-42-00	A4200__-POC-L-01_C4	HIPK_1596	BR	0.039	0.008	0.031	0.058	0.010
A-42-00	A4200__-POC-L-01_C4	HIPK_1597	BR	0.032	0.002	0.030	0.047	0.009
A-42-00	A4200__-POC-L-01_C4	HIPK_1598	BR	0.006	0.000	0.006	0.011	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1599	BR	0.073	0.032	0.041	0.093	0.010
A-42-00	A4200__-POC-L-01_C4	HIPK_1600	BR	0.018	0.008	0.010	0.043	0.018
A-42-00	A4200__-POC-L-01_C4	HIPK_1601	BR	0.185	0.013	0.172	0.268	0.069
A-42-00	A4200__-POC-L-01_C4	HIPK_1602	BR	0.057	0.014	0.043	0.090	0.058
A-42-00	A4200__-POC-L-01_C3	HIPK_1603	BR	0.017	0.009	0.008	0.019	0.003
A-42-00	A4200__-POC-L-01_C4	HIPK_1604	BR	0.046	0.042	0.004	0.073	0.012
A-42-00	A4200__-POC-L-01_C3	HIPK_1605	BR	0.009	0.004	0.005	0.014	0.001
A-42-00	A4200__-POC-L-01_C4	HIPK_1606	BR	0.013	0.005	0.008	0.021	0.007
A-42-00	A4200__-POC-L-01_C4	HIPK_1607	BR	0.014	0.007	0.007	0.019	0.002
A-42-00	A4200__-POC-L-01_C4	HIPK_1608	BR	0.062	0.028	0.034	0.077	0.007
A-42-00	A4200__-POC-L-01_C4	HIPK_1609	BR	0.021	0.011	0.010	0.033	0.018
A-42-00	A4200__-POC-L-01_C4	HIPK_1610	BR	0.011	0.006	0.005	0.017	0.002
A-42-00	A4200__-POC-L-01_C4	HIPK_1611	BR	0.214	0.098	0.116	0.586	0.097
A-42-00	A4200__-POC-L-01_C4	HIPK_1612	BR	0.065	0.029	0.036	0.112	0.023
A-42-00	A4200__-POC-L-01_C5	HIPK_1613	BR	0.009	0.002	0.007	0.015	0.000
A-42-00	A4200__-POC-L-01_C4	HIPK_1614	BR	0.033	0.022	0.011	0.051	0.026
A-42-00	A4200__-POC-L-01_C4	HIPK_1615	BR	0.008	0.006	0.002	0.012	0.001
A-42-00	A4200__-POC-L-01_C4	HIPK_1616	BR	0.019	0.019	0.000	0.028	0.003
A-42-00	A4200__-MM_-L-03_C1	HIPK_1617	BR	0.066	0.024	0.042	0.096	0.010
A-42-00	A4200__-MM_-L-03_C1	HIPK_1618	BR	0.017	0.011	0.006	0.023	0.005
A-42-00	A4200__-MM_-L-03_C1	HIPK_1619	BR	0.023	0.014	0.009	0.036	0.004
A-42-00	A4200__-MM_-L-03_C1	HIPK_1620	BR	0.014	0.011	0.003	0.019	0.004
A-42-00	A4200__-MM_-L-03_C1	HIPK_1621	BR	0.009	0.003	0.006	0.012	0.005
A-42-00	A4200__-MM_-L-03_C1	HIPK_1622	BR	0.027	0.012	0.015	0.046	0.010
A-42-00	A4200__-MM_-L-03_C1	HIPK_1623	BR	0.030	0.014	0.016	0.047	0.014
A-42-00	A4200__-MM_-L-03_C1	HIPK_1624	BR	0.021	0.007	0.014	0.027	0.007
A-42-00	A4200__-MM_-L-03_C1	HIPK_1625	BR	0.021	0.008	0.013	0.030	0.004
A-42-00	A4200__-MM_-L-03_C1	HIPK_1626	BR	0.013	0.006	0.007	0.022	0.004
A-42-00	A4200__-MM_-L-03_C1	HIPK_1627	BR	0.015	0.012	0.003	0.021	0.003
A-42-00	A4200__-MM_-L-03_C1	HIPK_1628	BR	0.016	0.009	0.007	0.023	0.002

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-03_C1	HIPK_1629	BR	0.010	0.007	0.003	0.015	0.003
A-42-00	A4200__-MM_-L-03_C1	HIPK_1630	BR	0.007	0.000	0.007	0.009	0.001
A-42-00	A4200__-MM_-L-03_C1	HIPK_1631	BR	0.017	0.003	0.014	0.030	0.009
A-42-00	A4200__-MM_-L-03_C1	HIPK_1632	BR	0.007	0.003	0.004	0.009	0.000
A-42-00	A4200__-MM_-L-03_C1	HIPK_1633	BR	0.042	0.021	0.021	0.079	0.005
A-42-00	A4200__-MM_-L-03_C1	HIPK_1634	BR	0.013	0.005	0.008	0.021	0.002
A-42-00	A4200__-MM_-L-03_C1	HIPK_1635	BR	0.014	0.003	0.011	0.023	0.000
A-42-00	A4200__-MM_-L-03_C1	HIPK_1636	BR	0.026	0.005	0.021	0.037	0.006
A-42-00	A4200__-MM_-L-03_C1	HIPK_1637	BR	0.008	0.006	0.002	0.014	0.003
A-42-00	A4200__-MM_-L-03_C1	HIPK_1638	BR	0.015	0.007	0.008	0.023	0.004
A-42-00	A4200__-MM_-L-03_C1	HIPK_1639	BR	0.010	0.005	0.005	0.014	0.001
A-42-00	A4200__-MM_-L-03_C1	HIPK_1640	BR	0.008	0.003	0.005	0.012	0.001
A-42-00	A4200__-MM_-L-03_C1	HIPK_1641	BR	0.016	0.006	0.010	0.025	0.005
A-42-00	A4200__-MM_-L-03_C1	HIPK_1642	BR	0.019	0.007	0.012	0.030	0.012
A-42-00	A4200__-MM_-L-03_C1	HIPK_1643	BR	0.017	0.007	0.010	0.026	0.009
A-42-00	A4200__-MM_-L-04_C15	HIPK_1644	BR	0.016	0.009	0.007	0.026	0.001
A-42-00	A4200__-MM_-L-04_C15	HIPK_1645	BR	0.017	0.011	0.006	0.030	0.005
A-42-00	A4200__-MM_-L-04_C15	HIPK_1646	BR	0.011	0.008	0.003	0.019	0.004
A-42-00	A4200__-MM_-L-04_C15	HIPK_1647	BR	0.012	0.006	0.006	0.016	0.003
A-42-00	A4200__-MM_-L-04_C15	HIPK_1648	BR	0.015	0.005	0.010	0.018	0.004
A-42-00	A4200__-MM_-L-04_C15	HIPK_1649	BR	0.022	0.013	0.009	0.032	0.004
A-42-00	A4200__-MM_-L-04_C15	HIPK_1650	BR	0.053	0.021	0.032	0.063	0.010
A-42-00	A4200__-MM_-L-04_C15	HIPK_1651	BR	0.045	0.028	0.017	0.070	0.004
A-42-00	A4200__-MM_-L-04_C15	HIPK_1652	BR	0.023	0.013	0.010	0.034	0.003
A-42-00	A4200__-MM_-L-04_C15	HIPK_1653	BR	0.007	0.005	0.002	0.010	0.000
A-42-00	A4200__-MM_-L-04_C15	HIPK_1654	BR	0.068	0.046	0.022	0.150	0.053
A-42-00	A4200__-MM_-L-04_C15	HIPK_1655	BR	0.063	0.020	0.043	0.123	0.048
A-42-00	A4200__-MM_-L-04_C15	HIPK_1656	BR	0.018	0.010	0.008	0.027	0.007
A-42-00	A4200__-MM_-L-04_C15	HIPK_1657	BR	0.030	0.015	0.015	0.059	0.037
A-42-00	A4200__-MM_-L-04_C15	HIPK_1658	BR	0.018	0.011	0.007	0.050	0.035
A-42-00	A4200__-MM_-L-04_C15	HIPK_1659	BR	0.007	0.001	0.006	0.011	0.011
A-42-00	A4200__-MM_-L-04_C15	HIPK_1660	BR	0.033	0.005	0.028	0.039	0.005
A-42-00	A4200__-MM_-L-04_C15	HIPK_1661	BR	0.010	0.002	0.008	0.015	0.004
A-42-00	A4200__-MM_-L-04_C15	HIPK_1662	BR	0.205	0.097	0.108	0.410	0.113

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-04_C15	HIPK_1663	BR	0.020	0.006	0.014	0.039	0.006
A-42-00	A4200__-MM_-L-04_C15	HIPK_1664	BR	0.038	0.007	0.031	0.056	0.015
A-42-00	A4200__-MM_-L-04_C15	HIPK_1665	BR	0.013	0.011	0.002	0.023	0.008
A-42-00	A4200__-MM_-L-04_C15	HIPK_1666	BR	0.018	0.003	0.015	0.025	0.003
A-42-00	A4200__-MM_-L-04_C15	HIPK_1667	BR	0.016	0.012	0.004	0.024	0.008
A-42-00	A4200__-MM_-L-04_C15	HIPK_1668	BR	0.026	0.013	0.013	0.037	0.008
A-42-00	A4200__-MM_-L-04_C15	HIPK_1669	BR	0.015	0.009	0.006	0.021	0.005
A-42-00	A4200__-MM_-L-04_C15	HIPK_1670	BR	0.022	0.006	0.016	0.030	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1671	BR	0.004	0.002	0.002	0.009	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1672	BR	0.097	0.050	0.047	0.234	0.064
A-42-00	A4200__-POC-L-01_C3	HIPK_1673	BR	0.014	0.012	0.002	0.023	0.010
A-42-00	A4200__-POC-L-01_C3	HIPK_1674	BR	0.049	0.029	0.020	0.119	0.049
A-42-00	A4200__-POC-L-01_C3	HIPK_1675	BR	0.047	0.024	0.023	0.073	0.014
A-42-00	A4200__-POC-L-01_C3	HIPK_1676	BR	0.027	0.012	0.015	0.036	0.013
A-42-00	A4200__-POC-L-01_C3	HIPK_1677	BR	0.014	0.000	0.014	0.016	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1678	BR	0.146	0.094	0.052	0.361	0.182
A-42-00	A4200__-POC-L-01_C3	HIPK_1679	BR	0.009	0.005	0.004	0.016	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1680	BR	0.016	0.007	0.009	0.028	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1681	BR	0.038	0.024	0.014	0.076	0.031
A-42-00	A4200__-POC-L-01_C3	HIPK_1682	BR	0.059	0.033	0.026	0.097	0.020
A-42-00	A4200__-POC-L-01_C3	HIPK_1683	BR	0.050	0.032	0.018	0.171	0.029
A-42-00	A4200__-POC-L-01_C3	HIPK_1684	BR	0.040	0.016	0.024	0.058	0.004
A-42-00	A4200__-POC-L-01_C3	HIPK_1685	BR	0.016	0.003	0.013	0.018	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1686	BR	0.026	0.007	0.019	0.040	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1687	BR	0.023	0.008	0.015	0.036	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1688	BR	0.071	0.056	0.015	0.156	0.052
A-42-00	A4200__-POC-L-01_C3	HIPK_1689	BR	0.063	0.016	0.047	0.090	0.009
A-42-00	A4200__-POC-L-01_C3	HIPK_1690	BR	0.013	0.005	0.008	0.014	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1691	BR	0.009	0.004	0.005	0.014	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1692	BR	0.021	0.007	0.014	0.039	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1693	BR	0.012	0.008	0.004	0.019	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1694	BR	0.040	0.022	0.018	0.079	0.024
A-42-00	A4200__-POC-L-01_C3	HIPK_1695	BR	0.011	0.010	0.001	0.018	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_1696	BR	0.027	0.015	0.012	0.037	0.010

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C3	HIPK_1697	BR	0.013	0.011	0.002	0.021	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1698	BR	0.004	0.004	0.000	0.005	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1699	BR	0.015	0.007	0.008	0.026	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1700	BR	0.009	0.003	0.006	0.016	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1701	BR	0.053	0.020	0.033	0.100	0.022
A-42-00	A4200__-POC-L-01_C3	HIPK_1702	BR	0.098	0.058	0.040	0.282	0.062
A-42-00	A4200__-POC-L-01_C3	HIPK_1703	BR	0.023	0.018	0.005	0.037	0.011
A-42-00	A4200__-POC-L-01_C3	HIPK_1704	BR	0.009	0.005	0.004	0.015	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_1705	BR	0.008	0.005	0.003	0.012	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1706	BR	0.059	0.026	0.033	0.138	0.039
A-42-00	A4200__-POC-L-01_C3	HIPK_1707	BR	0.004	0.003	0.001	0.006	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1708	BR	0.008	0.006	0.002	0.015	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1709	BR	0.008	0.008	0.000	0.011	0.004
A-42-00	A4200__-POC-L-01_C3	HIPK_1710	BR	0.007	0.006	0.001	0.011	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1711	BR	0.017	0.011	0.006	0.026	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1712	BR	0.012	0.008	0.004	0.019	0.008
A-42-00	A4200__-POC-L-01_C3	HIPK_1713	BR	0.008	0.004	0.004	0.012	0.012
A-42-00	A4200__-POC-L-01_C3	HIPK_1714	BR	0.020	0.010	0.010	0.032	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1715	BR	0.039	0.014	0.025	0.054	0.017
A-42-00	A4200__-POC-L-01_C3	HIPK_1716	BR	0.013	0.005	0.008	0.017	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1717	BR	0.009	0.005	0.004	0.014	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1718	BR	0.005	0.002	0.003	0.007	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1719	BR	0.034	0.024	0.010	0.045	0.018
A-42-00	A4200__-POC-L-01_C3	HIPK_1720	BR	0.017	0.016	0.001	0.032	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1721	BR	0.029	0.012	0.017	0.039	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1722	BR	0.022	0.013	0.009	0.031	0.009
A-42-00	A4200__-POC-L-01_C3	HIPK_1723	BR	0.075	0.070	0.005	0.109	0.035
A-42-00	A4200__-POC-L-01_C3	HIPK_1724	BR	0.029	0.029	0.000	0.033	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_1725	BR	0.035	0.011	0.024	0.057	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1726	BR	0.052	0.052	0.000	0.059	0.011
A-42-00	A4200__-POC-L-01_C3	HIPK_1727	BR	0.071	0.013	0.058	0.118	0.036
A-42-00	A4200__-POC-L-01_C3	HIPK_1728	BR	0.017	0.012	0.005	0.020	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_1729	BR	0.011	0.006	0.005	0.014	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1730	BR	0.010	0.010	0.000	0.012	0.001

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C3	HIPK_1731	BR	0.017	0.005	0.012	0.030	0.008
A-42-00	A4200__-POC-L-01_C3	HIPK_1732	BR	0.029	0.029	0.000	0.036	0.015
A-42-00	A4200__-POC-L-01_C3	HIPK_1733	BR	0.013	0.006	0.007	0.019	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1734	BR	0.034	0.018	0.016	0.055	0.008
A-42-00	A4200__-POC-L-01_C3	HIPK_1735	BR	0.044	0.026	0.018	0.075	0.029
A-42-00	A4200__-POC-L-01_C3	HIPK_1736	BR	0.019	0.000	0.019	0.036	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1737	BR	0.017	0.000	0.017	0.028	0.004
A-42-00	A4200__-POC-L-01_C3	HIPK_1738	BR	0.099	0.000	0.099	0.143	0.060
A-42-00	A4200__-POC-L-01_C3	HIPK_1739	BR	0.008	0.005	0.003	0.015	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1740	BR	0.006	0.001	0.005	0.009	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1741	BR	0.006	0.002	0.004	0.010	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1742	BR	0.012	0.004	0.008	0.024	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1743	BR	0.008	0.008	0.000	0.010	0.004
A-42-00	A4200__-POC-L-01_C3	HIPK_1744	BR	0.059	0.000	0.059	0.159	0.051
A-42-00	A4200__-POC-L-01_C3	HIPK_1745	BR	0.016	0.000	0.016	0.024	0.008
A-42-00	A4200__-POC-L-01_C3	HIPK_1746	BR	0.016	0.000	0.016	0.021	0.008
A-42-00	A4200__-POC-L-01_C3	HIPK_1747	BR	0.026	0.000	0.026	0.043	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_1748	BR	0.011	0.000	0.011	0.013	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1749	BR	0.042	0.000	0.042	0.149	0.038
A-42-00	A4200__-POC-L-01_C3	HIPK_1750	BR	0.058	0.018	0.040	0.087	0.000
A-42-00	PennHills_A-42	HIPK_1751	BR	0.033	0.020	0.013	0.037	0.009
A-42-00	A4200__-POC-L-01_C3	HIPK_1752	BR	0.030	0.015	0.015	0.043	0.014
A-42-00	A4200__-POC-L-01_C3	HIPK_1753	BR	0.017	0.005	0.012	0.027	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1754	BR	0.008	0.008	0.000	0.009	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1755	BR	0.012	0.012	0.000	0.015	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1756	BR	0.008	0.007	0.001	0.015	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1757	BR	0.017	0.014	0.003	0.020	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1758	BR	0.008	0.006	0.002	0.009	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1759	BR	0.008	0.008	0.000	0.010	0.004
A-42-00	A4200__-POC-L-01_C3	HIPK_1760	BR	0.064	0.009	0.055	0.080	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1761	BR	0.016	0.003	0.013	0.020	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1762	BR	0.039	0.000	0.039	0.074	0.066
A-42-00	A4200__-POC-L-01_C3	HIPK_1763	BR	0.024	0.020	0.004	0.074	0.023
A-42-00	A4200__-POC-L-01_C3	HIPK_1764	BR	0.029	0.028	0.001	0.068	0.018

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C3	HIPK_1765	BR	0.013	0.011	0.002	0.023	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1766	BR	0.073	0.045	0.028	0.096	0.025
A-42-00	A4200__-POC-L-01_C3	HIPK_1767	BR	0.080	0.026	0.054	0.141	0.070
A-42-00	A4200__-POC-L-01_C3	HIPK_1768	BR	0.023	0.018	0.005	0.028	0.010
A-42-00	A4200__-POC-L-01_C3	HIPK_1769	BR	0.010	0.007	0.003	0.013	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1770	BR	0.008	0.005	0.003	0.010	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1771	BR	0.006	0.004	0.002	0.009	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1772	BR	0.007	0.005	0.002	0.009	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1773	BR	0.005	0.003	0.002	0.006	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1774	BR	0.008	0.007	0.001	0.009	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1775	BR	0.012	0.010	0.002	0.020	0.013
A-42-00	A4200__-POC-L-01_C3	HIPK_1776	BR	0.006	0.006	0.000	0.009	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_1777	BR	0.008	0.008	0.000	0.009	0.005
A-42-00	A4200__-POC-L-01_C3	HIPK_1778	BR	0.008	0.008	0.000	0.009	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_1779	BR	0.004	0.004	0.000	0.005	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1780	BR	0.004	0.002	0.002	0.007	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1781	BR	0.099	0.029	0.070	0.443	0.161
A-42-00	A4200__-POC-L-01_C3	HIPK_1782	BR	0.017	0.001	0.016	0.021	0.004
A-42-00	A4200__-POC-L-01_C3	HIPK_1783	BR	0.011	0.005	0.006	0.018	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1784	BR	0.007	0.006	0.001	0.012	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1785	BR	0.006	0.005	0.001	0.008	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1786	BR	0.010	0.008	0.002	0.014	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1787	BR	0.013	0.013	0.000	0.027	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1788	BR	0.005	0.005	0.000	0.009	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1789	BR	0.005	0.005	0.000	0.008	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1790	BR	0.016	0.016	0.000	0.043	0.021
A-42-00	A4200__-POC-L-01_C3	HIPK_1791	BR	0.020	0.020	0.000	0.053	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1792	BR	0.011	0.011	0.000	0.022	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1793	BR	0.023	0.018	0.005	0.044	0.014
A-42-00	A4200__-POC-L-01_C3	HIPK_1794	BR	0.029	0.026	0.003	0.063	0.026
A-42-00	A4200__-POC-L-01_C3	HIPK_1795	BR	0.017	0.016	0.001	0.020	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1796	BR	0.028	0.024	0.004	0.060	0.022
A-42-00	A4200__-POC-L-01_C3	HIPK_1797	BR	0.039	0.018	0.021	0.090	0.030
A-42-00	A4200__-POC-L-01_C3	HIPK_1798	BR	0.020	0.011	0.009	0.026	0.005

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-POC-L-01_C3	HIPK_1799	BR	0.021	0.021	0.000	0.028	0.011
A-42-00	A4200__-POC-L-01_C3	HIPK_1800	BR	0.009	0.009	0.000	0.011	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_1801	BR	0.006	0.004	0.002	0.008	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1802	BR	0.036	0.025	0.011	0.047	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1803	BR	0.009	0.005	0.004	0.012	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1804	BR	0.010	0.006	0.004	0.013	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1805	BR	0.005	0.003	0.002	0.006	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1806	BR	0.014	0.008	0.006	0.021	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1807	BR	0.019	0.014	0.005	0.027	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1808	BR	0.032	0.024	0.008	0.049	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_1809	BR	0.016	0.015	0.001	0.020	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1810	BR	0.004	0.002	0.002	0.005	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1811	BR	0.003	0.003	0.000	0.004	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_1812	BR	0.005	0.004	0.001	0.008	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1813	BR	0.006	0.006	0.000	0.009	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1814	BR	0.012	0.012	0.000	0.020	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1815	BR	0.007	0.007	0.000	0.009	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1816	BR	0.020	0.015	0.005	0.029	0.004
A-42-00	A4200__-POC-L-01_C3	HIPK_1817	BR	0.019	0.013	0.006	0.020	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_1818	BR	0.006	0.003	0.003	0.008	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1819	BR	0.018	0.009	0.009	0.024	0.002
A-42-00	A4200__-POC-L-02_C3	HIPK_1820	BR	0.020	0.009	0.011	0.024	0.002
A-42-00	A4200__-POC-L-02_C3	HIPK_1821	BR	0.112	0.050	0.062	0.189	0.080
A-42-00	A4200__-POC-L-02_C4	HIPK_1822	BR	0.014	0.009	0.005	0.023	0.011
A-42-00	A4200__-POC-L-02_C7	HIPK_1823	BR	0.023	0.015	0.008	0.026	0.007
A-42-00	A4200__-POC-L-01_C5	HIPK_1824	BR	0.118	0.096	0.022	0.363	0.098
A-42-00	A4200__-POC-L-01_C3	HIPK_1825	BR	0.032	0.004	0.028	0.074	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_1826	BR	0.048	0.048	0.000	0.137	0.069
A-42-00	A4200__-MM_-L-07_C1	HIPK_1827	BR	0.011	0.011	0.000	0.017	0.002
A-42-00	A4200__-MM_-L-07_C1	HIPK_1828	BR	0.027	0.026	0.001	0.049	0.022
A-42-00	A4200__-MM_-L-07_C1	HIPK_1829	BR	0.008	0.007	0.001	0.015	0.001
A-42-00	A4200__-MM_-L-07_C1	HIPK_1830	BR	0.009	0.008	0.001	0.020	0.004
A-42-00	A4200__-MM_-L-07_C1	HIPK_1831	BR	0.011	0.011	0.000	0.018	0.006
A-42-00	A4200__-MM_-L-07_C1	HIPK_1832	BR	0.015	0.012	0.003	0.021	0.005

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C1	HIPK_1833	BR	0.017	0.014	0.003	0.028	0.005
A-42-00	A4200__-MM_-L-07_C1	HIPK_1834	BR	0.017	0.014	0.003	0.030	0.004
A-42-00	A4200__-MM_-L-07_C1	HIPK_1835	BR	0.011	0.009	0.002	0.017	0.005
A-42-00	A4200__-IM_-L-05_C8	HIPK_1836	BR	0.056	0.044	0.012	0.140	0.071
A-42-00	A4200__-IM_-L-05_C5	HIPK_1837	BR	0.216	0.186	0.030	0.945	0.365
A-42-00	A4200__-IM_-L-05_C5	HIPK_1838	BR	0.150	0.073	0.077	0.454	0.161
A-42-00	A4200__-MM_-L-04_C17	HIPK_1839	BR	0.095	0.095	0.000	0.302	0.082
A-42-00	A4200__-MM_-L-04_C17	HIPK_1840	BR	0.022	0.015	0.007	0.035	0.015
A-42-00	A4200__-MM_-L-04_C17	HIPK_1841	BR	0.035	0.035	0.000	0.088	0.038
A-42-00	A4200__-MM_-L-04_C17	HIPK_1842	BR	0.022	0.022	0.000	0.047	0.024
A-42-00	A4200__-MM_-L-04_C17	HIPK_1843	BR	0.018	0.015	0.003	0.029	0.004
A-42-00	A4200__-MM_-L-04_C17	HIPK_1844	BR	0.020	0.015	0.005	0.030	0.013
A-42-00	A4200__-MM_-L-04_C17	HIPK_1845	BR	0.132	0.104	0.028	0.283	0.062
A-42-00	A4200__-MM_-L-04_C17	HIPK_1846	BR	0.020	0.000	0.020	0.031	0.014
A-42-00	A4200__-MM_-L-04_C17	HIPK_1847	BR	0.057	0.000	0.057	0.345	0.111
A-42-00	A4200__-MM_-L-04_C17	HIPK_1848	BR	0.037	0.000	0.037	0.078	0.009
A-42-00	A4200__-MM_-L-04_C17	HIPK_1849	BR	0.043	0.000	0.043	0.119	0.019
A-42-00	A4200__-IM_-L-05_C5	HIPK_1850	BR	0.023	0.001	0.022	0.067	0.026
A-42-00	A4200__-IM_-L-05_C5	HIPK_1851	BR	0.014	0.014	0.000	0.026	0.007
A-42-00	A4200__-IM_-L-05_C5	HIPK_1852	BR	0.012	0.011	0.001	0.024	0.006
A-42-00	A4200__-IM_-L-05_C5	HIPK_1853	BR	0.116	0.091	0.025	0.558	0.201
A-42-00	A4200__-IM_-L-05_C5	HIPK_1854	BR	0.016	0.015	0.001	0.046	0.016
A-42-00	A4200__-IM_-L-05_C5	HIPK_1855	BR	0.016	0.001	0.015	0.026	0.005
A-42-00	A4200__-IM_-L-05_C5	HIPK_1856	BR	0.022	0.003	0.019	0.045	0.006
A-42-00	A4200__-IM_-L-05_C5	HIPK_1857	BR	0.023	0.010	0.013	0.035	0.004
A-42-00	A4200__-IM_-L-05_C5	HIPK_1858	BR	0.009	0.007	0.002	0.017	0.007
A-42-00	A4200__-IM_-L-05_C5	HIPK_1859	BR	0.017	0.006	0.011	0.025	0.002
A-42-00	A4200__-IM_-L-05_C5	HIPK_1860	BR	0.016	0.012	0.004	0.030	0.014
A-42-00	A4200__-IM_-L-05_C5	HIPK_1861	BR	0.013	0.009	0.004	0.021	0.010
A-42-00	A4200__-IM_-L-05_C5	HIPK_1862	BR	0.008	0.008	0.000	0.012	0.003
A-42-00	A4200__-IM_-L-05_C5	HIPK_1863	BR	0.014	0.010	0.004	0.025	0.008
A-42-00	A4200__-IM_-L-05_C5	HIPK_1864	BR	0.084	0.069	0.015	0.257	0.068
A-42-00	A4200__-IM_-L-05_C5	HIPK_1865	BR	0.015	0.015	0.000	0.026	0.000
A-42-00	A4200__-IM_-L-05_C5	HIPK_1866	BR	0.013	0.013	0.000	0.023	0.005

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C5	HIPK_1867	BR	0.023	0.023	0.000	0.043	0.005
A-42-00	A4200__-IM_-L-05_C5	HIPK_1868	BR	0.014	0.014	0.000	0.022	0.006
A-42-00	A4200__-IM_-L-05_C5	HIPK_1869	BR	0.052	0.046	0.006	0.140	0.044
A-42-00	A4200__-IM_-L-05_C5	HIPK_1870	BR	0.016	0.016	0.000	0.019	0.006
A-42-00	A4200__-IM_-L-05_C5	HIPK_1871	BR	0.049	0.039	0.010	0.103	0.026
A-42-00	A4200__-IM_-L-05_C5	HIPK_1872	BR	0.061	0.039	0.022	0.116	0.031
A-42-00	A4200__-IM_-L-05_C5	HIPK_1873	BR	0.018	0.011	0.007	0.050	0.021
A-42-00	A4200__-IM_-L-05_C5	HIPK_1874	BR	0.008	0.001	0.007	0.011	0.001
A-42-00	A4200__-IM_-L-05_C5	HIPK_1875	BR	0.007	0.007	0.000	0.011	0.004
A-42-00	A4200__-IM_-L-05_C5	HIPK_1876	BR	0.010	0.006	0.004	0.013	0.003
A-42-00	A4200__-IM_-L-05_C5	HIPK_1877	BR	0.044	0.031	0.013	0.060	0.023
A-42-00	A4200__-IM_-L-05_C5	HIPK_1878	BR	0.104	0.062	0.042	0.150	0.033
A-42-00	A4200__-IM_-L-05_C5	HIPK_1879	BR	0.291	0.286	0.005	0.845	0.315
A-42-00	A4200__-IM_-L-05_C6	HIPK_1880	BR	0.093	0.068	0.025	0.538	0.227
A-42-00	A4200__-IM_-L-05_C5	HIPK_1881	BR	0.018	0.015	0.003	0.024	0.010
A-42-00	A4200__-IM_-L-05_C5	HIPK_1882	BR	0.026	0.026	0.000	0.038	0.013
A-42-00	A4200__-IM_-L-05_C5	HIPK_1883	BR	0.054	0.052	0.002	0.120	0.040
A-42-00	A4200__-IM_-L-05_C5	HIPK_1884	BR	0.039	0.035	0.004	0.090	0.044
A-42-00	A4200__-IM_-L-05_C5	HIPK_1885	BR	0.050	0.043	0.007	0.108	0.056
A-42-00	A4200__-IM_-L-05_C5	HIPK_1886	BR	0.028	0.027	0.001	0.037	0.007
A-42-00	A4200__-IM_-L-05_C5	HIPK_1887	BR	0.037	0.028	0.009	0.083	0.031
A-42-00	A4200__-IM_-L-05_C5	HIPK_1888	BR	0.030	0.028	0.002	0.046	0.017
A-42-00	A4200__-IM_-L-05_C5	HIPK_1889	BR	0.039	0.037	0.002	0.078	0.018
A-42-00	A4200__-IM_-L-05_C6	HIPK_1890	BR	0.014	0.011	0.003	0.021	0.003
A-42-00	A4200__-IM_-L-05_C6	HIPK_1891	BR	0.027	0.027	0.000	0.045	0.016
A-42-00	A4200__-IM_-L-05_C6	HIPK_1892	BR	0.047	0.047	0.000	0.098	0.045
A-42-00	A4200__-IM_-L-05_C6	HIPK_1893	BR	0.021	0.019	0.002	0.028	0.004
A-42-00	A4200__-IM_-L-05_C6	HIPK_1894	BR	0.067	0.060	0.007	0.097	0.033
A-42-00	A4200__-IM_-L-05_C6	HIPK_1895	BR	0.029	0.029	0.000	0.044	0.024
A-42-00	A4200__-IM_-L-05_C6	HIPK_1896	BR	0.019	0.017	0.002	0.026	0.008
A-42-00	A4200__-IM_-L-05_C6	HIPK_1897	BR	0.027	0.022	0.005	0.038	0.015
A-42-00	A4200__-IM_-L-05_C6	HIPK_1898	BR	0.035	0.031	0.004	0.050	0.016
A-42-00	A4200__-IM_-L-05_C6	HIPK_1899	BR	0.036	0.034	0.002	0.063	0.029
A-42-00	A4200__-IM_-L-05_C6	HIPK_1900	BR	0.033	0.031	0.002	0.049	0.014

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C6	HIPK_1901	BR	0.019	0.016	0.003	0.039	0.015
A-42-00	A4200__-IM_-L-05_C6	HIPK_1902	BR	0.005	0.003	0.002	0.009	0.003
A-42-00	A4200__-IM_-L-05_C6	HIPK_1903	BR	0.010	0.006	0.004	0.016	0.004
A-42-00	A4200__-IM_-L-05_C6	HIPK_1904	BR	0.028	0.017	0.011	0.039	0.010
A-42-00	A4200__-MM_-L-07_C1	HIPK_1905	BR	0.038	0.021	0.017	0.064	0.064
A-42-00	A4200__-MM_-L-07_C1	HIPK_1906	BR	0.018	0.000	0.018	0.033	0.009
A-42-00	A4200__-MM_-L-07_C1	HIPK_1907	BR	0.013	0.000	0.013	0.022	0.005
A-42-00	A4200__-MM_-L-07_C1	HIPK_1908	BR	0.009	0.000	0.009	0.015	0.007
A-42-00	A4200__-MM_-L-04_C17	HIPK_1909	BR	0.033	0.022	0.011	0.058	0.024
A-42-00	A4200__-MM_-L-04_C17	HIPK_1910	BR	0.041	0.025	0.016	0.058	0.015
A-42-00	A4200__-MM_-L-04_C17	HIPK_1911	BR	0.009	0.008	0.001	0.011	0.005
A-42-00	A4200__-MM_-L-04_C17	HIPK_1912	BR	0.009	0.006	0.003	0.016	0.003
A-42-00	A4200__-MM_-L-04_C17	HIPK_1913	BR	0.037	0.037	0.000	0.048	0.021
A-42-00	A4200__-MM_-L-04_C17	HIPK_1914	BR	0.028	0.028	0.000	0.079	0.031
A-42-00	A4200__-MM_-L-04_C17	HIPK_1915	BR	0.043	0.000	0.043	0.130	0.061
A-42-00	A4200__-MM_-L-04_C17	HIPK_1916	BR	0.016	0.000	0.016	0.020	0.002
A-42-00	A4200__-MM_-L-04_C17	HIPK_1917	BR	0.253	0.253	0.000	0.305	0.163
A-42-00	A4200__-MM_-L-04_C17	HIPK_1918	BR	0.285	0.285	0.000	0.578	0.223
A-42-00	A4200__-MM_-L-04_C17	HIPK_1919	BR	0.280	0.280	0.000	0.604	0.277
A-42-00	A4200__-MM_-L-04_C17	HIPK_1920	BR	0.209	0.209	0.000	0.469	0.221
A-42-00	A4200__-MM_-L-04_C17	HIPK_1921	BR	0.038	0.026	0.012	0.064	0.008
A-42-00	A4200__-MM_-L-04_C17	HIPK_1922	BR	0.048	0.032	0.016	0.077	0.013
A-42-00	A4200__-MM_-L-04_C17	HIPK_1923	BR	0.214	0.214	0.000	0.242	0.080
A-42-00	A4200__-MM_-L-04_C17	HIPK_1924	BR	0.268	0.268	0.000	0.505	0.202
A-42-00	A4200__-MM_-L-04_C17	HIPK_1925	BR	0.024	0.024	0.000	0.063	0.019
A-42-00	A4200__-MM_-L-04_C17	HIPK_1926	BR	0.059	0.054	0.005	0.182	0.053
A-42-00	A4200__-MM_-L-04_C17	HIPK_1927	BR	0.152	0.101	0.051	0.319	0.086
A-42-00	A4200__-MM_-L-04_C17	HIPK_1928	BR	0.022	0.022	0.000	0.037	0.014
A-42-00	A4200__-MM_-L-04_C17	HIPK_1929	BR	0.016	0.016	0.000	0.026	0.008
A-42-00	A4200__-MM_-L-04_C16	HIPK_1930	BR	0.015	0.000	0.015	0.017	0.002
A-42-00	A4200__-MM_-L-04_C16	HIPK_1931	BR	0.030	0.023	0.007	0.050	0.018
A-42-00	A4200__-MM_-L-04_C17	HIPK_1932	BR	0.073	0.033	0.040	0.145	0.054
A-42-00	A4200__-IM_-L-05_C3	HIPK_1933	BR	0.020	0.006	0.014	0.035	0.014
A-42-00	A4200__-IM_-L-05_C3	HIPK_1934	BR	0.016	0.010	0.006	0.030	0.007

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C3	HIPK_1935	BR	0.020	0.010	0.010	0.043	0.010
A-42-00	A4200__-IM_-L-05_C3	HIPK_1936	BR	0.061	0.061	0.000	0.080	0.046
A-42-00	A4200__-IM_-L-05_C3	HIPK_1937	BR	0.041	0.036	0.005	0.070	0.029
A-42-00	A4200__-IM_-L-05_C3	HIPK_1938	BR	0.037	0.034	0.003	0.063	0.013
A-42-00	A4200__-IM_-L-05_C3	HIPK_1939	BR	0.029	0.024	0.005	0.047	0.004
A-42-00	A4200__-IM_-L-05_C3	HIPK_1940	BR	0.228	0.228	0.000	0.356	0.171
A-42-00	A4200__-IM_-L-05_C3	HIPK_1941	BR	0.244	0.244	0.000	0.391	0.175
A-42-00	A4200__-IM_-L-05_C3	HIPK_1942	BR	0.131	0.114	0.017	0.534	0.185
A-42-00	A4200__-IM_-L-05_C3	HIPK_1943	BR	0.011	0.011	0.000	0.019	0.009
A-42-00	A4200__-IM_-L-05_C3	HIPK_1944	BR	0.014	0.014	0.000	0.023	0.004
A-42-00	A4200__-IM_-L-05_C3	HIPK_1945	BR	0.009	0.006	0.003	0.015	0.000
A-42-00	A4200__-IM_-L-05_C3	HIPK_1946	BR	0.016	0.012	0.004	0.034	0.010
A-42-00	A4200__-IM_-L-05_C3	HIPK_1947	BR	0.019	0.019	0.000	0.034	0.010
A-42-00	A4200__-IM_-L-05_C3	HIPK_1948	BR	0.016	0.016	0.000	0.028	0.005
A-42-00	A4200__-IM_-L-05_C3	HIPK_1949	BR	0.165	0.129	0.036	0.369	0.078
A-42-00	A4200__-IM_-L-05_C3	HIPK_1950	BR	0.035	0.033	0.002	0.050	0.010
A-42-00	A4200__-IM_-L-05_C3	HIPK_1951	BR	0.027	0.021	0.006	0.057	0.017
A-42-00	A4200__-IM_-L-05_C3	HIPK_1952	BR	0.025	0.025	0.000	0.044	0.009
A-42-00	A4200__-IM_-L-05_C3	HIPK_1953	BR	0.050	0.033	0.017	0.079	0.012
A-42-00	A4200__-IM_-L-05_C3	HIPK_1954	BR	0.031	0.018	0.013	0.047	0.013
A-42-00	A4200__-IM_-L-05_C3	HIPK_1955	BR	0.009	0.007	0.002	0.014	0.000
A-42-00	A4200__-IM_-L-05_C3	HIPK_1956	BR	0.013	0.012	0.001	0.019	0.001
A-42-00	A4200__-IM_-L-05_C3	HIPK_1957	BR	0.018	0.005	0.013	0.027	0.009
A-42-00	A4200__-IM_-L-05_C3	HIPK_1958	BR	0.041	0.038	0.003	0.066	0.027
A-42-00	A4200__-IM_-L-05_C3	HIPK_1959	BR	0.028	0.015	0.013	0.079	0.023
A-42-00	A4200__-IM_-L-05_C1	HIPK_1960	BR	0.054	0.041	0.013	0.096	0.056
A-42-00	A4200__-IM_-L-05_C3	HIPK_1961	BR	0.014	0.010	0.004	0.016	0.002
A-42-00	A4200__-IM_-L-05_C3	HIPK_1962	BR	0.118	0.062	0.056	0.213	0.092
A-42-00	A4200__-IM_-L-05_C4	HIPK_1963	BR	0.063	0.029	0.034	0.113	0.010
A-42-00	A4200__-IM_-L-05_C3	HIPK_1964	BR	0.045	0.030	0.015	0.095	0.026
A-42-00	A4200__-IM_-L-05_C1	HIPK_1965	BR	0.092	0.076	0.016	0.132	0.062
A-42-00	A4200__-IM_-L-05_C1	HIPK_1966	BR	0.021	0.021	0.000	0.024	0.015
A-42-00	A4200__-IM_-L-05_C1	HIPK_1967	BR	0.011	0.011	0.000	0.022	0.009
A-42-00	A4200__-IM_-L-05_C1	HIPK_1968	BR	0.013	0.005	0.008	0.015	0.004

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C1	HIPK_1969	BR	0.014	0.008	0.006	0.022	0.008
A-42-00	A4200__-IM_-L-05_C1	HIPK_1970	BR	0.057	0.015	0.042	0.105	0.032
A-42-00	A4200__-IM_-L-05_C1	HIPK_1971	BR	0.064	0.058	0.006	0.138	0.035
A-42-00	A4200__-IM_-L-05_C1	HIPK_1972	BR	0.032	0.028	0.004	0.058	0.012
A-42-00	A4200__-IM_-L-05_C1	HIPK_1973	BR	0.031	0.010	0.021	0.038	0.015
A-42-00	A4200__-IM_-L-05_C2	HIPK_1974	BR	0.045	0.034	0.011	0.050	0.009
A-42-00	A4200__-IM_-L-05_C2	HIPK_1975	BR	0.074	0.065	0.009	0.125	0.048
A-42-00	A4200__-MM_-L-04_C18	HIPK_1976	BR	0.049	0.045	0.004	0.108	0.028
A-42-00	A4200__-IM_-L-05_C2	HIPK_1977	BR	0.040	0.026	0.014	0.105	0.037
A-42-00	A4200__-IM_-L-05_C2	HIPK_1978	BR	0.025	0.023	0.002	0.044	0.022
A-42-00	A4200__-IM_-L-05_C2	HIPK_1979	BR	0.061	0.041	0.020	0.128	0.026
A-42-00	A4200__-IM_-L-05_C2	HIPK_1980	BR	0.035	0.026	0.009	0.041	0.013
A-42-00	A4200__-IM_-L-05_C2	HIPK_1981	BR	0.033	0.031	0.002	0.066	0.029
A-42-00	A4200__-IM_-L-05_C2	HIPK_1982	BR	0.010	0.007	0.003	0.016	0.005
A-42-00	A4200__-IM_-L-05_C2	HIPK_1983	BR	0.017	0.015	0.002	0.022	0.009
A-42-00	A4200__-IM_-L-05_C2	HIPK_1984	BR	0.176	0.133	0.043	0.425	0.141
A-42-00	A4200__-IM_-L-05_C2	HIPK_1985	BR	0.043	0.026	0.017	0.061	0.006
A-42-00	A4200__-IM_-L-05_C2	HIPK_1986	BR	0.021	0.017	0.004	0.029	0.010
A-42-00	A4200__-IM_-L-05_C2	HIPK_1987	BR	0.158	0.118	0.040	0.311	0.067
A-42-00	A4200__-IM_-L-05_C2	HIPK_1988	BR	0.020	0.014	0.006	0.037	0.008
A-42-00	A4200__-IM_-L-05_C2	HIPK_1989	BR	0.017	0.012	0.005	0.024	0.003
A-42-00	A4200__-IM_-L-05_C2	HIPK_1990	BR	0.027	0.021	0.006	0.052	0.004
A-42-00	A4200__-MM_-L-04_C18	HIPK_1991	BR	0.085	0.060	0.025	0.265	0.050
A-42-00	A4200__-MM_-L-04_C18	HIPK_1992	BR	0.201	0.177	0.024	0.708	0.203
A-42-00	A4200__-MM_-L-04_C18	HIPK_1993	BR	0.185	0.163	0.022	0.727	0.236
A-42-00	A4200__-MM_-L-04_C18	HIPK_1994	BR	0.013	0.013	0.000	0.024	0.007
A-42-00	A4200__-MM_-L-04_C18	HIPK_1995	BR	0.027	0.024	0.003	0.035	0.007
A-42-00	A4200__-MM_-L-04_C18	HIPK_1996	BR	0.008	0.005	0.003	0.013	0.003
A-42-00	A4200__-MM_-L-04_C18	HIPK_1997	BR	0.060	0.059	0.001	0.093	0.024
A-42-00	A4200__-MM_-L-04_C18	HIPK_1998	BR	0.026	0.017	0.009	0.039	0.012
A-42-00	A4200__-MM_-L-06_C1	HIPK_1999	BR	0.055	0.054	0.001	0.094	0.023
A-41-00	HR002_C1	HIPK_2001	IB	0.078	0.038	0.040	0.145	0.052
A-41-00	HR002_C1	HIPK_2002	IB	0.023	0.010	0.013	0.037	0.006
A-42-00	PennHills_A-42	HIPK_2003	IB	0.040	0.026	0.014	0.053	0.015

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	PennHills_A-42	HIPK_2004	IB	0.041	0.016	0.025	0.044	0.003
A-42-00	PennHills_A-42	HIPK_2005	IB	0.060	0.040	0.020	0.064	0.020
A-42-00	PennHills_A-42	HIPK_2006	IB	0.029	0.012	0.017	0.031	0.005
A-42-00	PennHills_A-42	HIPK_2007	IB	0.024	0.013	0.011	0.027	0.007
A-42-00	PennHills_A-42	HIPK_2008	IB	0.053	0.039	0.014	0.061	0.021
A-42-00	PennHills_A-42	HIPK_2009	IB	0.009	0.004	0.005	0.010	0.000
A-42-00	PennHills_A-42	HIPK_2010	IB	0.006	0.006	0.000	0.008	0.000
A-42-00	PennHills_A-42	HIPK_2011	IB	0.007	0.001	0.006	0.008	0.000
A-42-00	PennHills_A-42	HIPK_2012	IB	0.033	0.019	0.014	0.037	0.008
A-42-00	PennHills_A-42	HIPK_2013	IB	0.016	0.003	0.013	0.021	0.000
A-42-00	PennHills_A-42	HIPK_2014	IB	0.108	0.041	0.067	0.112	0.009
A-42-00	PennHills_A-42	HIPK_2015	IB	0.032	0.017	0.015	0.036	0.006
A-42-00	A4200__-POC-L-02_C8	HIPK_2016	IB	0.022	0.000	0.022	0.040	0.013
A-42-00	A4200__-POC-L-02_C8	HIPK_2017	IB	0.055	0.000	0.055	0.096	0.028
A-42-00	A4200__-POC-L-02_C8	HIPK_2018	IB	0.021	0.001	0.020	0.027	0.001
A-42-00	A4200__-POC-L-02_C2	HIPK_2019	IB	0.119	0.065	0.054	0.130	0.023
A-42-00	A4200__-POC-L-02_C3	HIPK_2020	IB	0.016	0.007	0.009	0.023	0.004
A-42-00	A4200__-POC-L-02_C3	HIPK_2021	IB	0.019	0.010	0.009	0.026	0.005
A-42-00	A4200__-POC-L-02_C3	HIPK_2022	IB	0.064	0.003	0.061	0.094	0.005
A-42-00	A4200__-MM_-L-04_C10	HIPK_2023	IB	0.161	0.082	0.079	0.229	0.090
A-42-00	A4200__-MM_-L-04_C10	HIPK_2024	IB	0.016	0.006	0.010	0.022	0.004
A-42-00	A4200__-MM_-L-04_C10	HIPK_2025	IB	0.021	0.012	0.009	0.026	0.001
A-42-00	A4200__-MM_-L-04_C10	HIPK_2026	IB	0.047	0.018	0.029	0.087	0.030
A-42-00	A4200__-MM_-L-04_C11	HIPK_2027	IB	0.034	0.021	0.013	0.040	0.006
A-42-00	A4200__-MM_-L-04_C11	HIPK_2028	IB	0.065	0.036	0.029	0.075	0.025
A-42-00	A4200__-MM_-L-04_C11	HIPK_2029	IB	0.027	0.007	0.020	0.036	0.012
A-42-00	A4200__-POC-L-02_C4	HIPK_2030	IB	0.047	0.030	0.017	0.074	0.020
A-42-00	A4200__-POC-L-02_C4	HIPK_2031	IB	0.025	0.012	0.013	0.031	0.000
A-42-00	A4200__-MM_-L-04_C4	HIPK_2032	IB	0.020	0.009	0.011	0.022	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_2033	IB	0.010	0.002	0.008	0.015	0.005
A-42-00	A4200__-MM_-L-04_C8	HIPK_2034	IB	0.053	0.053	0.000	0.068	0.029
A-42-00	A4200__-MM_-L-04_C17	HIPK_2035	IB	0.172	0.158	0.014	0.659	0.200
A-42-00	A4200__-MM_-L-04_C5	HIPK_2036	IB	0.069	0.052	0.017	0.096	0.047
A-42-00	A4200__-MM_-L-04_C7	HIPK_2037	IB	0.023	0.012	0.011	0.024	0.006

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C11	HIPK_2038	IB	0.047	0.016	0.031	0.056	0.010
A-42-00	A4200__-MM_-L-07_C11	HIPK_2039	IB	0.017	0.004	0.013	0.021	0.001
A-42-00	A4200__-MM_-L-07_C11	HIPK_2040	IB	0.013	0.003	0.010	0.016	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_2041	IB	0.102	0.023	0.079	0.115	0.011
A-42-00	A4200__-POC-L-02_C3	HIPK_2042	IB	0.164	0.000	0.164	0.203	0.030
A-42-00	A4200__-POC-L-02_C7	HIPK_2043	IB	0.007	0.003	0.004	0.013	0.001
A-42-00	A4200__-POC-L-02_C8	HIPK_2044	IB	0.041	0.008	0.033	0.047	0.002
A-41-00	HR002_C1	HIPK_3001	GS	0.006	0.006	0.000	0.011	0.007
A-41-00	HR002_C1	HIPK_3002	GS	0.016	0.016	0.000	0.023	0.007
A-41-00	HR002_C1	HIPK_3003	GS	0.012	0.011	0.001	0.024	0.014
A-42-00	A4200__-MM_-L-07_C12	HIPK_3004	GS	0.016	0.016	0.000	0.028	0.012
A-41-00	HR001_C3	HIPK_4002	VF	0.026	0.011	0.015	0.047	0.004
A-41-00	HR002_C1	HIPK_4003	VF	0.043	0.042	0.001	0.154	0.014
A-41-00	HR002_C1	HIPK_4004	VF	0.026	0.026	0.000	0.060	0.031
A-41-00	HR002_C1	HIPK_4005	VF	0.024	0.024	0.000	0.041	0.012
A-42-00	PennHills_A-42	HIPK_4006	VF	0.010	0.010	0.000	0.022	0.002
A-42-00	PennHills_A-42	HIPK_4007	VF	0.015	0.000	0.015	0.056	0.017
A-42-00	A4200__-IM_-L-05_C7	HIPK_4008	VF	0.016	0.001	0.015	0.023	0.000
A-42-00	A4200__-MM_-L-07_C2	HIPK_4010	VF	0.028	0.019	0.009	0.043	0.007
A-42-00	A4200__-MM_-L-07_C2	HIPK_4011	VF	0.028	0.019	0.009	0.066	0.009
A-42-00	A4200__-IM_-L-05_C1	HIPK_4012	VF	0.005	0.005	0.000	0.009	0.002
A-42-00	A4200__-IM_-L-05_C1	HIPK_4013	VF	0.008	0.004	0.004	0.013	0.006
A-42-00	A4200__-IM_-L-05_C1	HIPK_4014	VF	0.014	0.008	0.006	0.021	0.007
A-42-00	A4200__-IM_-L-05_C3	HIPK_4015	VF	0.016	0.014	0.002	0.020	0.005
A-42-00	A4200__-MM_-L-04_C18	HIPK_4016	VF	0.037	0.032	0.005	0.104	0.029
A-42-00	A4200__-MM_-L-04_C18	HIPK_4017	VF	0.047	0.044	0.003	0.131	0.030
A-42-00	A4200__-MM_-L-04_C5	HIPK_4019	VF	0.011	0.010	0.001	0.018	0.003
A-42-00	A4200__-MM_-L-07_C9	HIPK_4020	VF	0.040	0.022	0.018	0.057	0.008
A-42-00	A4200__-MM_-L-07_C9	HIPK_4021	VF	0.060	0.040	0.020	0.096	0.019
A-42-00	A4200__-IM_-L-05_C6	HIPK_4022	VF	0.048	0.041	0.007	0.070	0.024
A-42-00	A4200__-IM_-L-05_C6	HIPK_4023	VF	0.046	0.044	0.002	0.088	0.023
A-42-00	A4200__-MM_-L-06_C1	HIPK_11001	BR	0.094	0.071	0.023	0.164	0.036
A-42-00	A4200__-MM_-L-06_C1	HIPK_11002	BR	0.023	0.014	0.009	0.036	0.015
A-42-00	A4200__-MM_-L-06_C1	HIPK_11003	BR	0.027	0.017	0.010	0.050	0.020

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-06_C1	HIPK_11004	BR	0.037	0.020	0.017	0.060	0.011
A-42-00	A4200__-MM_-L-06_C1	HIPK_11005	BR	0.039	0.027	0.012	0.083	0.029
A-42-00	A4200__-MM_-L-06_C1	HIPK_11006	BR	0.036	0.017	0.019	0.079	0.012
A-42-00	A4200__-MM_-L-06_C1	HIPK_11007	BR	0.019	0.019	0.000	0.041	0.020
A-42-00	A4200__-MM_-L-06_C1	HIPK_11008	BR	0.015	0.007	0.008	0.023	0.006
A-42-00	A4200__-MM_-L-06_C1	HIPK_11009	BR	0.015	0.004	0.011	0.019	0.002
A-42-00	A4200__-MM_-L-06_C1	HIPK_11010	BR	0.046	0.028	0.018	0.055	0.019
A-42-00	A4200__-MM_-L-06_C1	HIPK_11011	BR	0.018	0.010	0.008	0.028	0.001
A-42-00	A4200__-MM_-L-06_C1	HIPK_11012	BR	0.090	0.077	0.013	0.226	0.077
A-42-00	A4200__-MM_-L-06_C1	HIPK_11013	BR	0.105	0.101	0.004	0.318	0.173
A-42-00	A4200__-MM_-L-04_C18	HIPK_11014	BR	0.025	0.009	0.016	0.034	0.006
A-42-00	A4200__-MM_-L-04_C18	HIPK_11015	BR	0.019	0.007	0.012	0.033	0.003
A-42-00	A4200__-MM_-L-04_C18	HIPK_11016	BR	0.007	0.003	0.004	0.011	0.001
A-42-00	A4200__-MM_-L-06_C1	HIPK_11017	BR	0.130	0.113	0.017	0.481	0.139
A-42-00	A4200__-MM_-L-06_C1	HIPK_11018	BR	0.069	0.056	0.013	0.167	0.050
A-42-00	A4200__-MM_-L-06_C1	HIPK_11019	BR	0.038	0.032	0.006	0.072	0.030
A-42-00	A4200__-MM_-L-06_C1	HIPK_11020	BR	0.033	0.026	0.007	0.078	0.033
A-42-00	A4200__-MM_-L-06_C1	HIPK_11021	BR	0.066	0.057	0.009	0.142	0.035
A-42-00	A4200__-MM_-L-06_C1	HIPK_11022	BR	0.018	0.004	0.014	0.025	0.006
A-42-00	A4200__-MM_-L-06_C1	HIPK_11023	BR	0.017	0.017	0.000	0.028	0.013
A-42-00	A4200__-MM_-L-06_C1	HIPK_11024	BR	0.016	0.016	0.000	0.028	0.013
A-42-00	A4200__-MM_-L-06_C1	HIPK_11025	BR	0.071	0.054	0.017	0.206	0.032
A-42-00	A4200__-MM_-L-06_C1	HIPK_11026	BR	0.025	0.025	0.000	0.037	0.013
A-42-00	A4200__-MM_-L-07_C16	HIPK_11027	BR	0.028	0.028	0.000	0.040	0.014
A-42-00	A4200__-MM_-L-04_C13	HIPK_11028	BR	0.014	0.008	0.006	0.021	0.003
A-42-00	A4200__-IM_-L-05_C8	HIPK_11029	BR	0.016	0.014	0.002	0.027	0.010
A-42-00	A4200__-IM_-L-05_C8	HIPK_11030	BR	0.031	0.029	0.002	0.057	0.023
A-42-00	A4200__-IM_-L-05_C8	HIPK_11031	BR	0.027	0.021	0.006	0.044	0.003
A-42-00	A4200__-IM_-L-05_C8	HIPK_11032	BR	0.026	0.022	0.004	0.044	0.009
A-42-00	A4200__-IM_-L-05_C8	HIPK_11033	BR	0.023	0.017	0.006	0.040	0.011
A-42-00	A4200__-IM_-L-05_C8	HIPK_11034	BR	0.023	0.021	0.002	0.038	0.014
A-42-00	A4200__-IM_-L-05_C8	HIPK_11035	BR	0.088	0.088	0.000	0.192	0.063
A-42-00	A4200__-IM_-L-05_C6	HIPK_11036	BR	0.043	0.043	0.000	0.082	0.042
A-42-00	A4200__-IM_-L-05_C8	HIPK_11037	BR	0.146	0.122	0.024	0.300	0.108

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C6	HIPK_11038	BR	0.019	0.014	0.005	0.040	0.016
A-42-00	A4200__-MM_-L-07_C6	HIPK_11039	BR	0.091	0.090	0.001	0.253	0.051
A-42-00	A4200__-MM_-L-07_C6	HIPK_11040	BR	0.030	0.029	0.001	0.065	0.034
A-42-00	A4200__-MM_-L-07_C6	HIPK_11041	BR	0.038	0.036	0.002	0.083	0.083
A-42-00	A4200__-MM_-L-07_C6	HIPK_11042	BR	0.063	0.056	0.007	0.166	0.037
A-42-00	A4200__-MM_-L-07_C6	HIPK_11043	BR	0.077	0.074	0.003	0.141	0.050
A-42-00	A4200__-MM_-L-07_C6	HIPK_11044	BR	0.029	0.027	0.002	0.036	0.018
A-42-00	A4200__-MM_-L-07_C6	HIPK_11045	BR	0.051	0.046	0.005	0.126	0.019
A-42-00	A4200__-MM_-L-07_C6	HIPK_11046	BR	0.019	0.014	0.005	0.022	0.009
A-42-00	A4200__-MM_-L-07_C6	HIPK_11047	BR	0.043	0.032	0.011	0.074	0.022
A-42-00	A4200__-MM_-L-07_C6	HIPK_11048	BR	0.289	0.221	0.068	0.969	0.465
A-42-00	A4200__-MM_-L-07_C6	HIPK_11049	BR	0.037	0.035	0.002	0.096	0.054
A-42-00	A4200__-MM_-L-07_C6	HIPK_11050	BR	0.040	0.026	0.014	0.106	0.063
A-42-00	A4200__-MM_-L-07_C6	HIPK_11051	BR	0.047	0.026	0.021	0.132	0.045
A-42-00	A4200__-MM_-L-07_C6	HIPK_11052	BR	0.038	0.036	0.002	0.075	0.036
A-42-00	A4200__-MM_-L-07_C4	HIPK_11053	BR	0.101	0.044	0.057	0.127	0.030
A-42-00	A4200__-MM_-L-07_C6	HIPK_11054	BR	0.012	0.012	0.000	0.017	0.007
A-42-00	A4200__-MM_-L-07_C6	HIPK_11055	BR	0.011	0.011	0.000	0.018	0.008
A-42-00	A4200__-MM_-L-07_C6	HIPK_11056	BR	0.093	0.060	0.033	0.239	0.059
A-42-00	A4200__-MM_-L-07_C6	HIPK_11057	BR	0.042	0.040	0.002	0.087	0.034
A-42-00	A4200__-MM_-L-07_C6	HIPK_11058	BR	0.067	0.052	0.015	0.276	0.084
A-42-00	A4200__-MM_-L-07_C6	HIPK_11059	BR	0.031	0.030	0.001	0.067	0.023
A-42-00	A4200__-MM_-L-07_C6	HIPK_11060	BR	0.030	0.017	0.013	0.051	0.013
A-42-00	A4200__-MM_-L-07_C6	HIPK_11061	BR	0.019	0.009	0.010	0.031	0.003
A-42-00	A4200__-MM_-L-07_C6	HIPK_11062	BR	0.087	0.081	0.006	0.190	0.068
A-42-00	A4200__-MM_-L-07_C10	HIPK_11063	BR	0.269	0.146	0.123	1.085	0.375
A-42-00	A4200__-MM_-L-07_C6	HIPK_11064	BR	0.044	0.041	0.003	0.053	0.029
A-42-00	A4200__-MM_-L-07_C10	HIPK_11065	BR	0.075	0.037	0.038	0.275	0.096
A-42-00	A4200__-MM_-L-07_C6	HIPK_11066	BR	0.035	0.035	0.000	0.066	0.017
A-42-00	A4200__-MM_-L-07_C6	HIPK_11067	BR	0.013	0.012	0.001	0.021	0.000
A-42-00	A4200__-MM_-L-07_C10	HIPK_11068	BR	0.012	0.012	0.000	0.022	0.006
A-42-00	A4200__-MM_-L-07_C10	HIPK_11069	BR	0.014	0.014	0.000	0.026	0.020
A-42-00	A4200__-MM_-L-07_C11	HIPK_11070	BR	0.038	0.038	0.000	0.084	0.055
A-42-00	A4200__-MM_-L-07_C11	HIPK_11071	BR	0.057	0.034	0.023	0.082	0.038

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C11	HIPK_11072	BR	0.012	0.008	0.004	0.019	0.007
A-42-00	A4200__-MM_-L-07_C10	HIPK_11073	BR	0.036	0.035	0.001	0.075	0.046
A-42-00	A4200__-MM_-L-07_C10	HIPK_11074	BR	0.052	0.023	0.029	0.052	0.005
A-42-00	A4200__-MM_-L-07_C10	HIPK_11075	BR	0.037	0.028	0.009	0.079	0.039
A-42-00	A4200__-MM_-L-07_C7	HIPK_11076	BR	0.083	0.062	0.021	0.189	0.094
A-42-00	A4200__-MM_-L-07_C7	HIPK_11077	BR	0.048	0.042	0.006	0.107	0.050
A-42-00	A4200__-MM_-L-07_C7	HIPK_11078	BR	0.076	0.053	0.023	0.185	0.069
A-42-00	A4200__-IM_-L-05_C7	HIPK_11079	BR	0.193	0.168	0.025	0.629	0.183
A-42-00	A4200__-IM_-L-05_C7	HIPK_11080	BR	0.116	0.084	0.032	0.143	0.044
A-42-00	A4200__-IM_-L-05_C7	HIPK_11081	BR	0.088	0.065	0.023	0.294	0.076
A-42-00	A4200__-IM_-L-05_C7	HIPK_11082	BR	0.028	0.020	0.008	0.050	0.020
A-42-00	A4200__-IM_-L-05_C7	HIPK_11083	BR	0.080	0.054	0.026	0.261	0.095
A-42-00	A4200__-IM_-L-05_C7	HIPK_11084	BR	0.068	0.044	0.024	0.195	0.064
A-42-00	A4200__-IM_-L-05_C7	HIPK_11085	BR	0.009	0.008	0.001	0.016	0.011
A-42-00	A4200__-IM_-L-05_C7	HIPK_11086	BR	0.017	0.016	0.001	0.024	0.010
A-42-00	A4200__-IM_-L-05_C7	HIPK_11087	BR	0.073	0.066	0.007	0.159	0.046
A-42-00	A4200__-IM_-L-05_C7	HIPK_11088	BR	0.134	0.105	0.029	0.451	0.139
A-42-00	A4200__-IM_-L-05_C7	HIPK_11089	BR	0.037	0.025	0.012	0.060	0.048
A-42-00	A4200__-IM_-L-05_C7	HIPK_11090	BR	0.163	0.139	0.024	0.458	0.184
A-42-00	A4200__-IM_-L-05_C7	HIPK_11091	BR	0.164	0.159	0.005	0.538	0.386
A-42-00	A4200__-IM_-L-05_C7	HIPK_11092	BR	0.041	0.037	0.004	0.069	0.045
A-42-00	A4200__-IM_-L-05_C7	HIPK_11093	BR	0.178	0.121	0.057	0.655	0.158
A-42-00	A4200__-IM_-L-05_C7	HIPK_11094	BR	0.144	0.124	0.020	0.319	0.133
A-42-00	A4200__-MM_-L-07_C2	HIPK_11095	BR	0.085	0.059	0.026	0.194	0.106
A-42-00	A4200__-MM_-L-07_C2	HIPK_11096	BR	0.021	0.019	0.002	0.038	0.016
A-42-00	A4200__-MM_-L-07_C2	HIPK_11097	BR	0.053	0.053	0.000	0.194	0.060
A-42-00	A4200__-MM_-L-07_C2	HIPK_11098	BR	0.017	0.005	0.012	0.027	0.006
A-42-00	A4200__-MM_-L-07_C2	HIPK_11099	BR	0.034	0.025	0.009	0.057	0.014
A-42-00	A4200__-MM_-L-07_C2	HIPK_11100	BR	0.096	0.070	0.026	0.258	0.092
A-42-00	A4200__-MM_-L-07_C3	HIPK_11101	BR	0.218	0.163	0.055	0.751	0.113
A-42-00	A4200__-MM_-L-07_C2	HIPK_11102	BR	0.033	0.033	0.000	0.066	0.026
A-42-00	A4200__-MM_-L-07_C2	HIPK_11103	BR	0.051	0.051	0.000	0.087	0.022
A-42-00	A4200__-MM_-L-07_C2	HIPK_11104	BR	0.029	0.028	0.001	0.059	0.018
A-42-00	A4200__-MM_-L-07_C2	HIPK_11105	BR	0.054	0.042	0.012	0.140	0.028

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-06_C1	HIPK_11106	BR	0.079	0.071	0.008	0.267	0.059
A-42-00	A4200__-MM_-L-06_C1	HIPK_11107	BR	0.022	0.014	0.008	0.044	0.012
A-42-00	A4200__-MM_-L-07_C16	HIPK_11108	BR	0.082	0.075	0.007	0.231	0.058
A-42-00	A4200__-MM_-L-07_C16	HIPK_11109	BR	0.051	0.038	0.013	0.108	0.016
A-42-00	A4200__-MM_-L-07_C16	HIPK_11110	BR	0.010	0.010	0.000	0.019	0.007
A-42-00	A4200__-MM_-L-07_C16	HIPK_11111	BR	0.007	0.007	0.000	0.011	0.002
A-42-00	A4200__-MM_-L-07_C16	HIPK_11112	BR	0.010	0.010	0.000	0.016	0.004
A-42-00	A4200__-MM_-L-07_C16	HIPK_11113	BR	0.070	0.069	0.001	0.150	0.058
A-42-00	A4200__-MM_-L-07_C16	HIPK_11114	BR	0.074	0.066	0.008	0.160	0.074
A-42-00	A4200__-MM_-L-07_C16	HIPK_11115	BR	0.035	0.021	0.014	0.061	0.010
A-42-00	A4200__-MM_-L-07_C4	HIPK_11116	BR	0.070	0.066	0.004	0.179	0.042
A-42-00	A4200__-IM_-L-05_C7	HIPK_11117	BR	0.054	0.048	0.006	0.201	0.094
A-42-00	A4200__-IM_-L-05_C7	HIPK_11118	BR	0.029	0.026	0.003	0.042	0.012
A-42-00	A4200__-MM_-L-07_C4	HIPK_11119	BR	0.021	0.013	0.008	0.038	0.013
A-42-00	A4200__-MM_-L-07_C4	HIPK_11120	BR	0.013	0.007	0.006	0.021	0.003
A-42-00	A4200__-MM_-L-07_C4	HIPK_11121	BR	0.016	0.014	0.002	0.023	0.006
A-42-00	A4200__-MM_-L-07_C4	HIPK_11122	BR	0.031	0.020	0.011	0.049	0.008
A-42-00	A4200__-MM_-L-07_C4	HIPK_11123	BR	0.129	0.092	0.037	0.356	0.078
A-42-00	A4200__-MM_-L-07_C4	HIPK_11124	BR	0.085	0.056	0.029	0.133	0.035
A-42-00	A4200__-MM_-L-07_C4	HIPK_11125	BR	0.020	0.013	0.007	0.036	0.011
A-42-00	A4200__-MM_-L-07_C4	HIPK_11126	BR	0.018	0.017	0.001	0.037	0.016
A-42-00	A4200__-MM_-L-07_C4	HIPK_11127	BR	0.026	0.023	0.003	0.046	0.024
A-42-00	A4200__-MM_-L-07_C4	HIPK_11128	BR	0.038	0.036	0.002	0.087	0.033
A-42-00	A4200__-MM_-L-07_C4	HIPK_11129	BR	0.021	0.006	0.015	0.039	0.015
A-42-00	A4200__-MM_-L-07_C4	HIPK_11130	BR	0.017	0.005	0.012	0.040	0.006
A-42-00	A4200__-MM_-L-07_C4	HIPK_11131	BR	0.018	0.011	0.007	0.026	0.006
A-42-00	A4200__-MM_-L-07_C4	HIPK_11132	BR	0.059	0.044	0.015	0.139	0.050
A-42-00	A4200__-MM_-L-07_C4	HIPK_11133	BR	0.080	0.052	0.028	0.149	0.058
A-42-00	A4200__-MM_-L-07_C4	HIPK_11134	BR	0.043	0.022	0.021	0.070	0.011
A-42-00	A4200__-MM_-L-07_C4	HIPK_11135	BR	0.022	0.019	0.003	0.029	0.012
A-42-00	A4200__-MM_-L-07_C4	HIPK_11136	BR	0.118	0.072	0.046	0.211	0.042
A-42-00	A4200__-MM_-L-07_C4	HIPK_11137	BR	0.101	0.084	0.017	0.309	0.102
A-42-00	A4200__-MM_-L-07_C4	HIPK_11138	BR	0.054	0.041	0.013	0.121	0.040
A-42-00	A4200__-MM_-L-07_C4	HIPK_11139	BR	0.103	0.054	0.049	0.240	0.056

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C12	HIPK_11140	BR	0.042	0.042	0.000	0.062	0.026
A-42-00	A4200__-MM_-L-07_C9	HIPK_11141	BR	0.073	0.062	0.011	0.204	0.090
A-42-00	A4200__-MM_-L-07_C12	HIPK_11142	BR	0.021	0.021	0.000	0.036	0.020
A-42-00	A4200__-MM_-L-07_C9	HIPK_11143	BR	0.019	0.019	0.000	0.026	0.014
A-42-00	A4200__-MM_-L-07_C9	HIPK_11144	BR	0.083	0.049	0.034	0.143	0.018
A-42-00	A4200__-MM_-L-07_C9	HIPK_11145	BR	0.083	0.082	0.001	0.153	0.048
A-42-00	A4200__-MM_-L-07_C12	HIPK_11146	BR	0.011	0.000	0.011	0.017	0.010
A-42-00	A4200__-MM_-L-07_C12	HIPK_11147	BR	0.013	0.001	0.012	0.018	0.006
A-42-00	A4200__-MM_-L-07_C12	HIPK_11148	BR	0.013	0.007	0.006	0.017	0.008
A-42-00	A4200__-MM_-L-07_C13	HIPK_11149	BR	0.026	0.026	0.000	0.037	0.007
A-42-00	A4200__-MM_-L-07_C1	HIPK_11150	BR	0.039	0.025	0.014	0.059	0.027
A-42-00	A4200__-MM_-L-07_C1	HIPK_11151	BR	0.053	0.044	0.009	0.084	0.045
A-42-00	A4200__-MM_-L-07_C1	HIPK_11152	BR	0.012	0.007	0.005	0.014	0.004
A-42-00	A4200__-MM_-L-07_C1	HIPK_11153	BR	0.037	0.027	0.010	0.048	0.020
A-42-00	A4200__-MM_-L-07_C1	HIPK_11154	BR	0.034	0.027	0.007	0.051	0.011
A-42-00	A4200__-MM_-L-07_C11	HIPK_11155	BR	0.022	0.014	0.008	0.030	0.009
A-42-00	A4200__-MM_-L-07_C11	HIPK_11156	BR	0.015	0.015	0.000	0.021	0.005
A-42-00	A4200__-MM_-L-07_C12	HIPK_11157	BR	0.010	0.010	0.000	0.015	0.002
A-42-00	A4200__-MM_-L-07_C11	HIPK_11158	BR	0.014	0.014	0.000	0.017	0.002
A-42-00	A4200__-MM_-L-07_C12	HIPK_11159	BR	0.019	0.017	0.002	0.037	0.014
A-42-00	A4200__-MM_-L-07_C12	HIPK_11160	BR	0.016	0.016	0.000	0.023	0.009
A-42-00	A4200__-MM_-L-07_C12	HIPK_11161	BR	0.013	0.013	0.000	0.025	0.011
A-42-00	A4200__-MM_-L-07_C12	HIPK_11162	BR	0.012	0.012	0.000	0.018	0.003
A-42-00	A4200__-MM_-L-07_C17	HIPK_11163	BR	0.019	0.011	0.008	0.045	0.006
A-42-00	A4200__-MM_-L-07_C17	HIPK_11164	BR	0.045	0.032	0.013	0.056	0.030
A-42-00	A4200__-MM_-L-07_C17	HIPK_11165	BR	0.021	0.019	0.002	0.038	0.008
A-42-00	A4200__-MM_-L-07_C12	HIPK_11166	BR	0.022	0.013	0.009	0.038	0.006
A-42-00	A4200__-MM_-L-07_C12	HIPK_11167	BR	0.011	0.007	0.004	0.015	0.003
A-42-00	A4200__-MM_-L-07_C9	HIPK_11168	BR	0.014	0.010	0.004	0.024	0.009
A-42-00	A4200__-MM_-L-07_C9	HIPK_11169	BR	0.026	0.025	0.001	0.031	0.008
A-42-00	A4200__-MM_-L-07_C9	HIPK_11170	BR	0.042	0.041	0.001	0.064	0.038
A-42-00	A4200__-MM_-L-07_C15	HIPK_11171	BR	0.023	0.017	0.006	0.040	0.003
A-42-00	A4200__-MM_-L-07_C15	HIPK_11172	BR	0.042	0.037	0.005	0.101	0.047
A-42-00	A4200__-MM_-L-07_C15	HIPK_11173	BR	0.125	0.083	0.042	0.455	0.136

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C15	HIPK_11174	BR	0.263	0.164	0.099	0.263	0.058
A-42-00	A4200__-MM_-L-07_C9	HIPK_11175	BR	0.064	0.063	0.001	0.172	0.099
A-42-00	A4200__-MM_-L-07_C9	HIPK_11176	BR	0.033	0.018	0.015	0.069	0.014
A-42-00	A4200__-MM_-L-07_C9	HIPK_11177	BR	0.013	0.013	0.000	0.014	0.004
A-42-00	A4200__-MM_-L-07_C15	HIPK_11178	BR	0.040	0.027	0.013	0.061	0.009
A-42-00	A4200__-MM_-L-07_C15	HIPK_11179	BR	0.036	0.021	0.015	0.069	0.022
A-42-00	A4200__-MM_-L-07_C15	HIPK_11180	BR	0.031	0.022	0.009	0.108	0.038
A-42-00	A4200__-MM_-L-04_C13	HIPK_11181	BR	0.009	0.009	0.000	0.013	0.005
A-42-00	A4200__-MM_-L-04_C13	HIPK_11182	BR	0.025	0.024	0.001	0.041	0.016
A-42-00	A4200__-MM_-L-04_C13	HIPK_11183	BR	0.026	0.026	0.000	0.053	0.013
A-42-00	A4200__-MM_-L-04_C13	HIPK_11184	BR	0.033	0.033	0.000	0.047	0.021
A-42-00	A4200__-MM_-L-04_C13	HIPK_11185	BR	0.029	0.029	0.000	0.051	0.019
A-42-00	A4200__-MM_-L-04_C13	HIPK_11186	BR	0.031	0.027	0.004	0.060	0.012
A-42-00	A4200__-MM_-L-04_C13	HIPK_11187	BR	0.009	0.009	0.000	0.016	0.005
A-42-00	A4200__-MM_-L-04_C13	HIPK_11188	BR	0.017	0.017	0.000	0.037	0.013
A-42-00	A4200__-MM_-L-04_C12	HIPK_11189	BR	0.078	0.073	0.005	0.229	0.038
A-42-00	A4200__-MM_-L-04_C12	HIPK_11190	BR	0.077	0.058	0.019	0.096	0.033
A-42-00	A4200__-MM_-L-04_C12	HIPK_11191	BR	0.028	0.017	0.011	0.040	0.005
A-42-00	A4200__-MM_-L-04_C5	HIPK_11192	BR	0.039	0.039	0.000	0.098	0.022
A-42-00	A4200__-MM_-L-04_C5	HIPK_11193	BR	0.015	0.012	0.003	0.027	0.007
A-42-00	A4200__-MM_-L-04_C5	HIPK_11194	BR	0.017	0.016	0.001	0.026	0.013
A-42-00	A4200__-MM_-L-04_C7	HIPK_11195	BR	0.024	0.022	0.002	0.049	0.021
A-42-00	A4200__-MM_-L-04_C7	HIPK_11196	BR	0.049	0.029	0.020	0.056	0.006
A-42-00	A4200__-MM_-L-04_C7	HIPK_11197	BR	0.022	0.019	0.003	0.047	0.017
A-42-00	A4200__-MM_-L-04_C5	HIPK_11198	BR	0.024	0.020	0.004	0.050	0.027
A-42-00	A4200__-MM_-L-07_C13	HIPK_11199	BR	0.029	0.029	0.000	0.108	0.031
A-42-00	A4200__-MM_-L-07_C13	HIPK_11200	BR	0.006	0.006	0.000	0.011	0.006
A-42-00	A4200__-MM_-L-07_C13	HIPK_11201	BR	0.004	0.004	0.000	0.006	0.003
A-42-00	A4200__-MM_-L-07_C13	HIPK_11202	BR	0.006	0.003	0.003	0.009	0.004
A-42-00	A4200__-MM_-L-07_C13	HIPK_11203	BR	0.013	0.008	0.005	0.015	0.007
A-42-00	A4200__-MM_-L-07_C13	HIPK_11204	BR	0.015	0.007	0.008	0.035	0.007
A-42-00	A4200__-MM_-L-07_C13	HIPK_11205	BR	0.026	0.023	0.003	0.052	0.008
A-42-00	A4200__-MM_-L-07_C4	HIPK_11206	BR	0.022	0.022	0.000	0.033	0.005
A-42-00	A4200__-MM_-L-04_C5	HIPK_11207	BR	0.020	0.019	0.001	0.027	0.011

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-04_C12	HIPK_11208	BR	0.009	0.005	0.004	0.014	0.000
A-42-00	A4200__-MM_-L-04_C7	HIPK_11209	BR	0.038	0.034	0.004	0.042	0.003
A-42-00	A4200__-MM_-L-04_C7	HIPK_11210	BR	0.010	0.010	0.000	0.011	0.001
A-42-00	A4200__-MM_-L-04_C13	HIPK_11211	BR	0.008	0.007	0.001	0.011	0.002
A-42-00	A4200__-MM_-L-04_C13	HIPK_11212	BR	0.011	0.011	0.000	0.015	0.006
A-42-00	A4200__-MM_-L-07_C12	HIPK_11213	BR	0.006	0.006	0.000	0.008	0.001
A-42-00	A4200__-MM_-L-07_C10	HIPK_11214	BR	0.008	0.008	0.000	0.009	0.003
A-42-00	A4200__-MM_-L-07_C8	HIPK_11215	BR	0.015	0.015	0.000	0.019	0.008
A-42-00	A4200__-MM_-L-07_C9	HIPK_11216	BR	0.020	0.020	0.000	0.030	0.013
A-42-00	A4200__-MM_-L-07_C9	HIPK_11217	BR	0.010	0.007	0.003	0.014	0.005
A-42-00	A4200__-MM_-L-07_C9	HIPK_11218	BR	0.013	0.009	0.004	0.022	0.005
A-42-00	A4200__-MM_-L-07_C4	HIPK_11219	BR	0.014	0.003	0.011	0.018	0.002
A-42-00	A4200__-MM_-L-07_C4	HIPK_11220	BR	0.012	0.006	0.006	0.016	0.001
A-42-00	A4200__-MM_-L-07_C4	HIPK_11221	BR	0.009	0.003	0.006	0.012	0.002
A-42-00	A4200__-MM_-L-07_C4	HIPK_11222	BR	0.016	0.013	0.003	0.028	0.010
A-42-00	A4200__-MM_-L-07_C15	HIPK_11223	BR	0.021	0.009	0.012	0.027	0.008
A-42-00	A4200__-MM_-L-07_C15	HIPK_11224	BR	0.026	0.019	0.007	0.053	0.021
A-42-00	A4200__-MM_-L-07_C15	HIPK_11225	BR	0.010	0.007	0.003	0.012	0.002
A-42-00	A4200__-MM_-L-07_C15	HIPK_11226	BR	0.014	0.012	0.002	0.021	0.006
A-42-00	A4200__-MM_-L-04_C17	HIPK_11227	BR	0.013	0.008	0.005	0.019	0.004
A-42-00	A4200__-MM_-L-04_C17	HIPK_11228	BR	0.007	0.002	0.005	0.011	0.004
A-42-00	A4200__-MM_-L-04_C17	HIPK_11229	BR	0.008	0.005	0.003	0.013	0.000
A-42-00	A4200__-IM_-L-05_C4	HIPK_11230	BR	0.035	0.022	0.013	0.050	0.017
A-42-00	A4200__-IM_-L-05_C5	HIPK_11231	BR	0.005	0.005	0.000	0.006	0.003
A-42-00	A4200__-IM_-L-05_C5	HIPK_11232	BR	0.008	0.007	0.001	0.010	0.002
A-42-00	A4200__-IM_-L-05_C5	HIPK_11233	BR	0.006	0.004	0.002	0.007	0.001
A-42-00	A4200__-IM_-L-05_C6	HIPK_11234	BR	0.017	0.015	0.002	0.024	0.005
A-42-00	A4200__-IM_-L-05_C6	HIPK_11235	BR	0.021	0.000	0.021	0.029	0.005
A-42-00	A4200__-IM_-L-05_C6	HIPK_11236	BR	0.011	0.000	0.011	0.015	0.002
A-42-00	A4200__-IM_-L-05_C7	HIPK_11237	BR	0.016	0.007	0.009	0.021	0.007
A-42-00	A4200__-IM_-L-05_C7	HIPK_11238	BR	0.038	0.019	0.019	0.062	0.019
A-42-00	A4200__-IM_-L-05_C7	HIPK_11239	BR	0.014	0.013	0.001	0.019	0.007
A-42-00	A4200__-IM_-L-05_C7	HIPK_11240	BR	0.011	0.010	0.001	0.017	0.001
A-42-00	A4200__-IM_-L-05_C7	HIPK_11241	BR	0.010	0.008	0.002	0.016	0.007

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-IM_-L-05_C7	HIPK_11242	BR	0.024	0.003	0.021	0.026	0.003
A-42-00	A4200__-IM_-L-05_C7	HIPK_11243	BR	0.048	0.009	0.039	0.080	0.012
A-42-00	A4200__-MM_-L-07_C6	HIPK_11244	BR	0.013	0.011	0.002	0.021	0.005
A-42-00	A4200__-MM_-L-07_C4	HIPK_11245	BR	0.009	0.003	0.006	0.013	0.002
A-42-00	A4200__-IM_-L-05_C1	HIPK_11246	BR	0.006	0.006	0.000	0.008	0.000
A-42-00	A4200__-IM_-L-05_C1	HIPK_11247	BR	0.024	0.024	0.000	0.052	0.022
A-42-00	A4200__-MM_-L-06_C1	HIPK_11248	BR	0.013	0.008	0.005	0.020	0.005
A-42-00	A4200__-IM_-L-05_C3	HIPK_11249	BR	0.004	0.000	0.004	0.008	0.003
A-42-00	A4200__-IM_-L-05_C3	HIPK_11250	BR	0.015	0.009	0.006	0.023	0.005
A-42-00	A4200__-IM_-L-05_C5	HIPK_11251	BR	0.014	0.011	0.003	0.024	0.005
A-42-00	A4200__-IM_-L-05_C5	HIPK_11252	BR	0.007	0.007	0.000	0.013	0.004
A-42-00	A4200__-IM_-L-05_C3	HIPK_11253	BR	0.006	0.006	0.000	0.009	0.002
A-42-00	A4200__-IM_-L-05_C5	HIPK_11254	BR	0.008	0.007	0.001	0.012	0.004
A-42-00	A4200__-IM_-L-05_C5	HIPK_11255	BR	0.006	0.000	0.006	0.014	0.003
A-42-00	A4200__-IM_-L-05_C6	HIPK_11256	BR	0.033	0.033	0.000	0.075	0.024
A-42-00	A4200__-MM_-L-07_C4	HIPK_11257	BR	0.030	0.013	0.017	0.071	0.008
A-42-00	A4200__-IM_-L-05_C7	HIPK_11258	BR	0.006	0.000	0.006	0.008	0.002
A-42-00	A4200__-IM_-L-05_C7	HIPK_11259	BR	0.024	0.007	0.017	0.065	0.018
A-42-00	A4200__-IM_-L-05_C7	HIPK_11260	BR	0.052	0.025	0.027	0.168	0.055
A-42-00	A4200__-IM_-L-05_C8	HIPK_11261	BR	0.007	0.007	0.000	0.013	0.004
A-42-00	A4200__-IM_-L-05_C8	HIPK_11262	BR	0.030	0.030	0.000	0.152	0.055
A-42-00	A4200__-IM_-L-05_C8	HIPK_11263	BR	0.024	0.024	0.000	0.045	0.019
A-42-00	A4200__-IM_-L-05_C8	HIPK_11264	BR	0.010	0.010	0.000	0.020	0.006
A-42-00	A4200__-MM_-L-03_C1	HIPK_11265	BR	0.035	0.035	0.000	0.043	0.005
A-42-00	A4200__-MM_-L-03_C1	HIPK_11266	BR	0.018	0.015	0.003	0.028	0.009
A-42-00	A4200__-MM_-L-04_C1	HIPK_11267	BR	0.020	0.020	0.000	0.046	0.015
A-42-00	A4200__-MM_-L-04_C13	HIPK_11268	BR	0.008	0.008	0.000	0.011	0.004
A-42-00	A4200__-MM_-L-04_C13	HIPK_11269	BR	0.026	0.022	0.004	0.037	0.007
A-42-00	A4200__-MM_-L-04_C13	HIPK_11270	BR	0.024	0.023	0.001	0.053	0.010
A-42-00	A4200__-MM_-L-04_C15	HIPK_11271	BR	0.036	0.025	0.011	0.092	0.021
A-42-00	A4200__-MM_-L-04_C17	HIPK_11272	BR	0.010	0.010	0.000	0.011	0.001
A-42-00	A4200__-MM_-L-04_C3	HIPK_11273	BR	0.020	0.011	0.009	0.031	0.008
A-42-00	A4200__-MM_-L-04_C7	HIPK_11274	BR	0.014	0.014	0.000	0.014	0.000
A-42-00	A4200__-MM_-L-04_C7	HIPK_11275	BR	0.022	0.022	0.000	0.027	0.006

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-06_C1	HIPK_11276	BR	0.023	0.018	0.005	0.056	0.013
A-42-00	A4200__-MM_-L-07_C1	HIPK_11277	BR	0.008	0.004	0.004	0.010	0.002
A-42-00	A4200__-MM_-L-07_C1	HIPK_11278	BR	0.006	0.003	0.003	0.008	0.003
A-42-00	A4200__-MM_-L-07_C1	HIPK_11279	BR	0.007	0.000	0.007	0.011	0.003
A-42-00	A4200__-MM_-L-07_C6	HIPK_11280	BR	0.024	0.016	0.008	0.031	0.002
A-42-00	A4200__-MM_-L-07_C6	HIPK_11281	BR	0.010	0.010	0.000	0.019	0.009
A-42-00	A4200__-MM_-L-07_C11	HIPK_11282	BR	0.007	0.005	0.002	0.011	0.001
A-42-00	A4200__-MM_-L-07_C10	HIPK_11283	BR	0.004	0.004	0.000	0.007	0.002
A-42-00	A4200__-MM_-L-07_C10	HIPK_11284	BR	0.038	0.038	0.000	0.083	0.047
A-42-00	A4200__-MM_-L-07_C4	HIPK_11285	BR	0.020	0.003	0.017	0.030	0.010
A-42-00	A4200__-MM_-L-07_C12	HIPK_11286	BR	0.015	0.015	0.000	0.020	0.006
A-42-00	A4200__-MM_-L-07_C12	HIPK_11287	BR	0.005	0.005	0.000	0.009	0.004
A-42-00	A4200__-MM_-L-07_C12	HIPK_11288	BR	0.003	0.003	0.000	0.004	0.001
A-42-00	A4200__-MM_-L-07_C17	HIPK_11289	BR	0.017	0.014	0.003	0.035	0.012
A-42-00	A4200__-MM_-L-07_C17	HIPK_11290	BR	0.014	0.002	0.012	0.018	0.001
A-42-00	A4200__-MM_-L-07_C14	HIPK_11291	BR	0.016	0.009	0.007	0.024	0.009
A-42-00	A4200__-MM_-L-07_C9	HIPK_11292	BR	0.087	0.068	0.019	0.133	0.066
A-42-00	A4200__-MM_-L-07_C15	HIPK_11293	BR	0.011	0.011	0.000	0.015	0.007
A-42-00	A4200__-MM_-L-07_C15	HIPK_11294	BR	0.007	0.001	0.006	0.010	0.001
A-42-00	A4200__-MM_-L-07_C15	HIPK_11295	BR	0.016	0.016	0.000	0.031	0.013
A-42-00	A4200__-MM_-L-07_C9	HIPK_11296	BR	0.026	0.013	0.013	0.046	0.003
A-42-00	A4200__-MM_-L-07_C9	HIPK_11297	BR	0.023	0.012	0.011	0.050	0.004
A-42-00	A4200__-MM_-L-07_C16	HIPK_11298	BR	0.009	0.009	0.000	0.013	0.006
A-42-00	A4200__-MM_-L-07_C18	HIPK_11299	BR	0.012	0.011	0.001	0.019	0.003
A-42-00	A4200__-MM_-L-07_C2	HIPK_11300	BR	0.015	0.009	0.006	0.023	0.003
A-42-00	A4200__-MM_-L-07_C2	HIPK_11301	BR	0.022	0.006	0.016	0.028	0.003
A-42-00	A4200__-MM_-L-07_C2	HIPK_11302	BR	0.012	0.005	0.007	0.031	0.018
A-42-00	A4200__-MM_-L-07_C2	HIPK_11303	BR	0.015	0.011	0.004	0.046	0.017
A-42-00	A4200__-MM_-L-07_C3	HIPK_11304	BR	0.090	0.076	0.014	0.259	0.047
A-42-00	A4200__-MM_-L-07_C9	HIPK_11305	BR	0.007	0.005	0.002	0.008	0.002
A-42-00	A4200__-MM_-L-07_C4	HIPK_11306	BR	0.008	0.007	0.001	0.017	0.004
A-42-00	A4200__-MM_-L-07_C4	HIPK_11307	BR	0.018	0.004	0.014	0.042	0.001
A-42-00	A4200__-MM_-L-07_C4	HIPK_11308	BR	0.018	0.018	0.000	0.062	0.019
A-42-00	A4200__-MM_-L-07_C4	HIPK_11309	BR	0.008	0.002	0.006	0.014	0.006

ALCOSAN POC	Model Subcatchment	Concept Municipal Project UID	BMP Type	Concept Municipal Project Area (acres)	Public ROW or Parcel		Concept Municipal Project Individual Drainage Area (acres)*	Concept Municipal Project Individual Project Impervious Drainage Area (acres)*
					Area of Municipal Project in Public ROW (acres)	Area of Municipal Project outside of Public ROW (acres)		
A-42-00	A4200__-MM_-L-07_C4	HIPK_11310	BR	0.095	0.082	0.013	0.383	0.108
A-42-00	A4200__-MM_-L-07_C4	HIPK_11311	BR	0.029	0.025	0.004	0.042	0.011
A-42-00	A4200__-MM_-L-07_C4	HIPK_11312	BR	0.027	0.026	0.001	0.062	0.017
A-42-00	A4200__-MM_-L-07_C4	HIPK_11313	BR	0.033	0.005	0.028	0.085	0.023
A-42-00	A4200__-MM_-L-07_C6	HIPK_11314	BR	0.006	0.006	0.000	0.012	0.001
A-42-00	A4200__-MM_-L-07_C9	HIPK_11315	BR	0.017	0.017	0.000	0.027	0.004
A-42-00	A4200__-MM_-L-07_C9	HIPK_11316	BR	0.009	0.009	0.000	0.016	0.004
A-42-00	A4200__-MM_-L-07_C9	HIPK_11317	BR	0.020	0.020	0.000	0.037	0.012
A-42-00	A4200__-MM_-L-07_C9	HIPK_11318	BR	0.006	0.005	0.001	0.009	0.000
A-42-00	A4200__-MM_-L-07_C9	HIPK_11319	BR	0.008	0.007	0.001	0.013	0.003
A-42-00	A4200__-MM_-L-07_C9	HIPK_11320	BR	0.013	0.013	0.000	0.026	0.006
A-42-00	A4200__-POC-L-01_C2	HIPK_11321	BR	0.012	0.012	0.000	0.021	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_11322	BR	0.027	0.024	0.003	0.051	0.025
A-42-00	A4200__-POC-L-01_C3	HIPK_11323	BR	0.005	0.005	0.000	0.005	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_11324	BR	0.003	0.003	0.000	0.007	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_11325	BR	0.013	0.013	0.000	0.041	0.027
A-42-00	A4200__-POC-L-01_C3	HIPK_11326	BR	0.037	0.037	0.000	0.189	0.103
A-42-00	A4200__-POC-L-01_C3	HIPK_11327	BR	0.463	0.463	0.000	0.967	0.346
A-42-00	A4200__-POC-L-01_C3	HIPK_11328	BR	0.028	0.020	0.008	0.047	0.014
A-42-00	A4200__-POC-L-01_C3	HIPK_11329	BR	0.020	0.018	0.002	0.041	0.011
A-42-00	A4200__-POC-L-01_C3	HIPK_11330	BR	0.058	0.000	0.058	0.135	0.030
A-42-00	A4200__-POC-L-01_C3	HIPK_11331	BR	0.010	0.010	0.000	0.013	0.013
A-42-00	A4200__-POC-L-01_C3	HIPK_11332	BR	0.028	0.028	0.000	0.044	0.017
A-42-00	A4200__-POC-L-01_C3	HIPK_11333	BR	0.007	0.006	0.001	0.007	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_11334	BR	0.013	0.005	0.008	0.025	0.003
A-42-00	A4200__-POC-L-01_C4	HIPK_11335	BR	0.016	0.008	0.008	0.021	0.010
A-42-00	A4200__-POC-L-01_C4	HIPK_11336	BR	0.011	0.007	0.004	0.016	0.004
A-42-00	A4200__-POC-L-01_C4	HIPK_11337	BR	0.018	0.015	0.003	0.026	0.008
A-42-00	A4200__-POC-L-01_C5	HIPK_11338	BR	0.002	0.002	0.000	0.005	0.002
A-42-00	A4200__-POC-L-01_C5	HIPK_11339	BR	0.024	0.024	0.000	0.049	0.014
A-42-00	A4200__-POC-L-01_C5	HIPK_11340	BR	0.018	0.008	0.010	0.027	0.003
A-42-00	A4200__-POC-L-01_C5	HIPK_11341	BR	0.006	0.006	0.000	0.009	0.002
A-42-00	A4200__-POC-L-02_C8	HIPK_11342	BR	0.007	0.005	0.002	0.014	0.003
A-42-00	A4200__-IM_-L-05_C6	HIPK_11343	BR	0.011	0.007	0.004	0.017	0.006



ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Municipal Projects
Infiltration Basin
Grass Swales
Vegetated Filter Strips
Bioretention
Permeable Pavement


State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

East

ALCOSAN GSI Project
Highland Park (A-36 thru A-42)
Concept Municipal GSI Projects

Path: N:\PROJ\340\036-05 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\HighlandPark_ConceptMuniGI_East.mxd

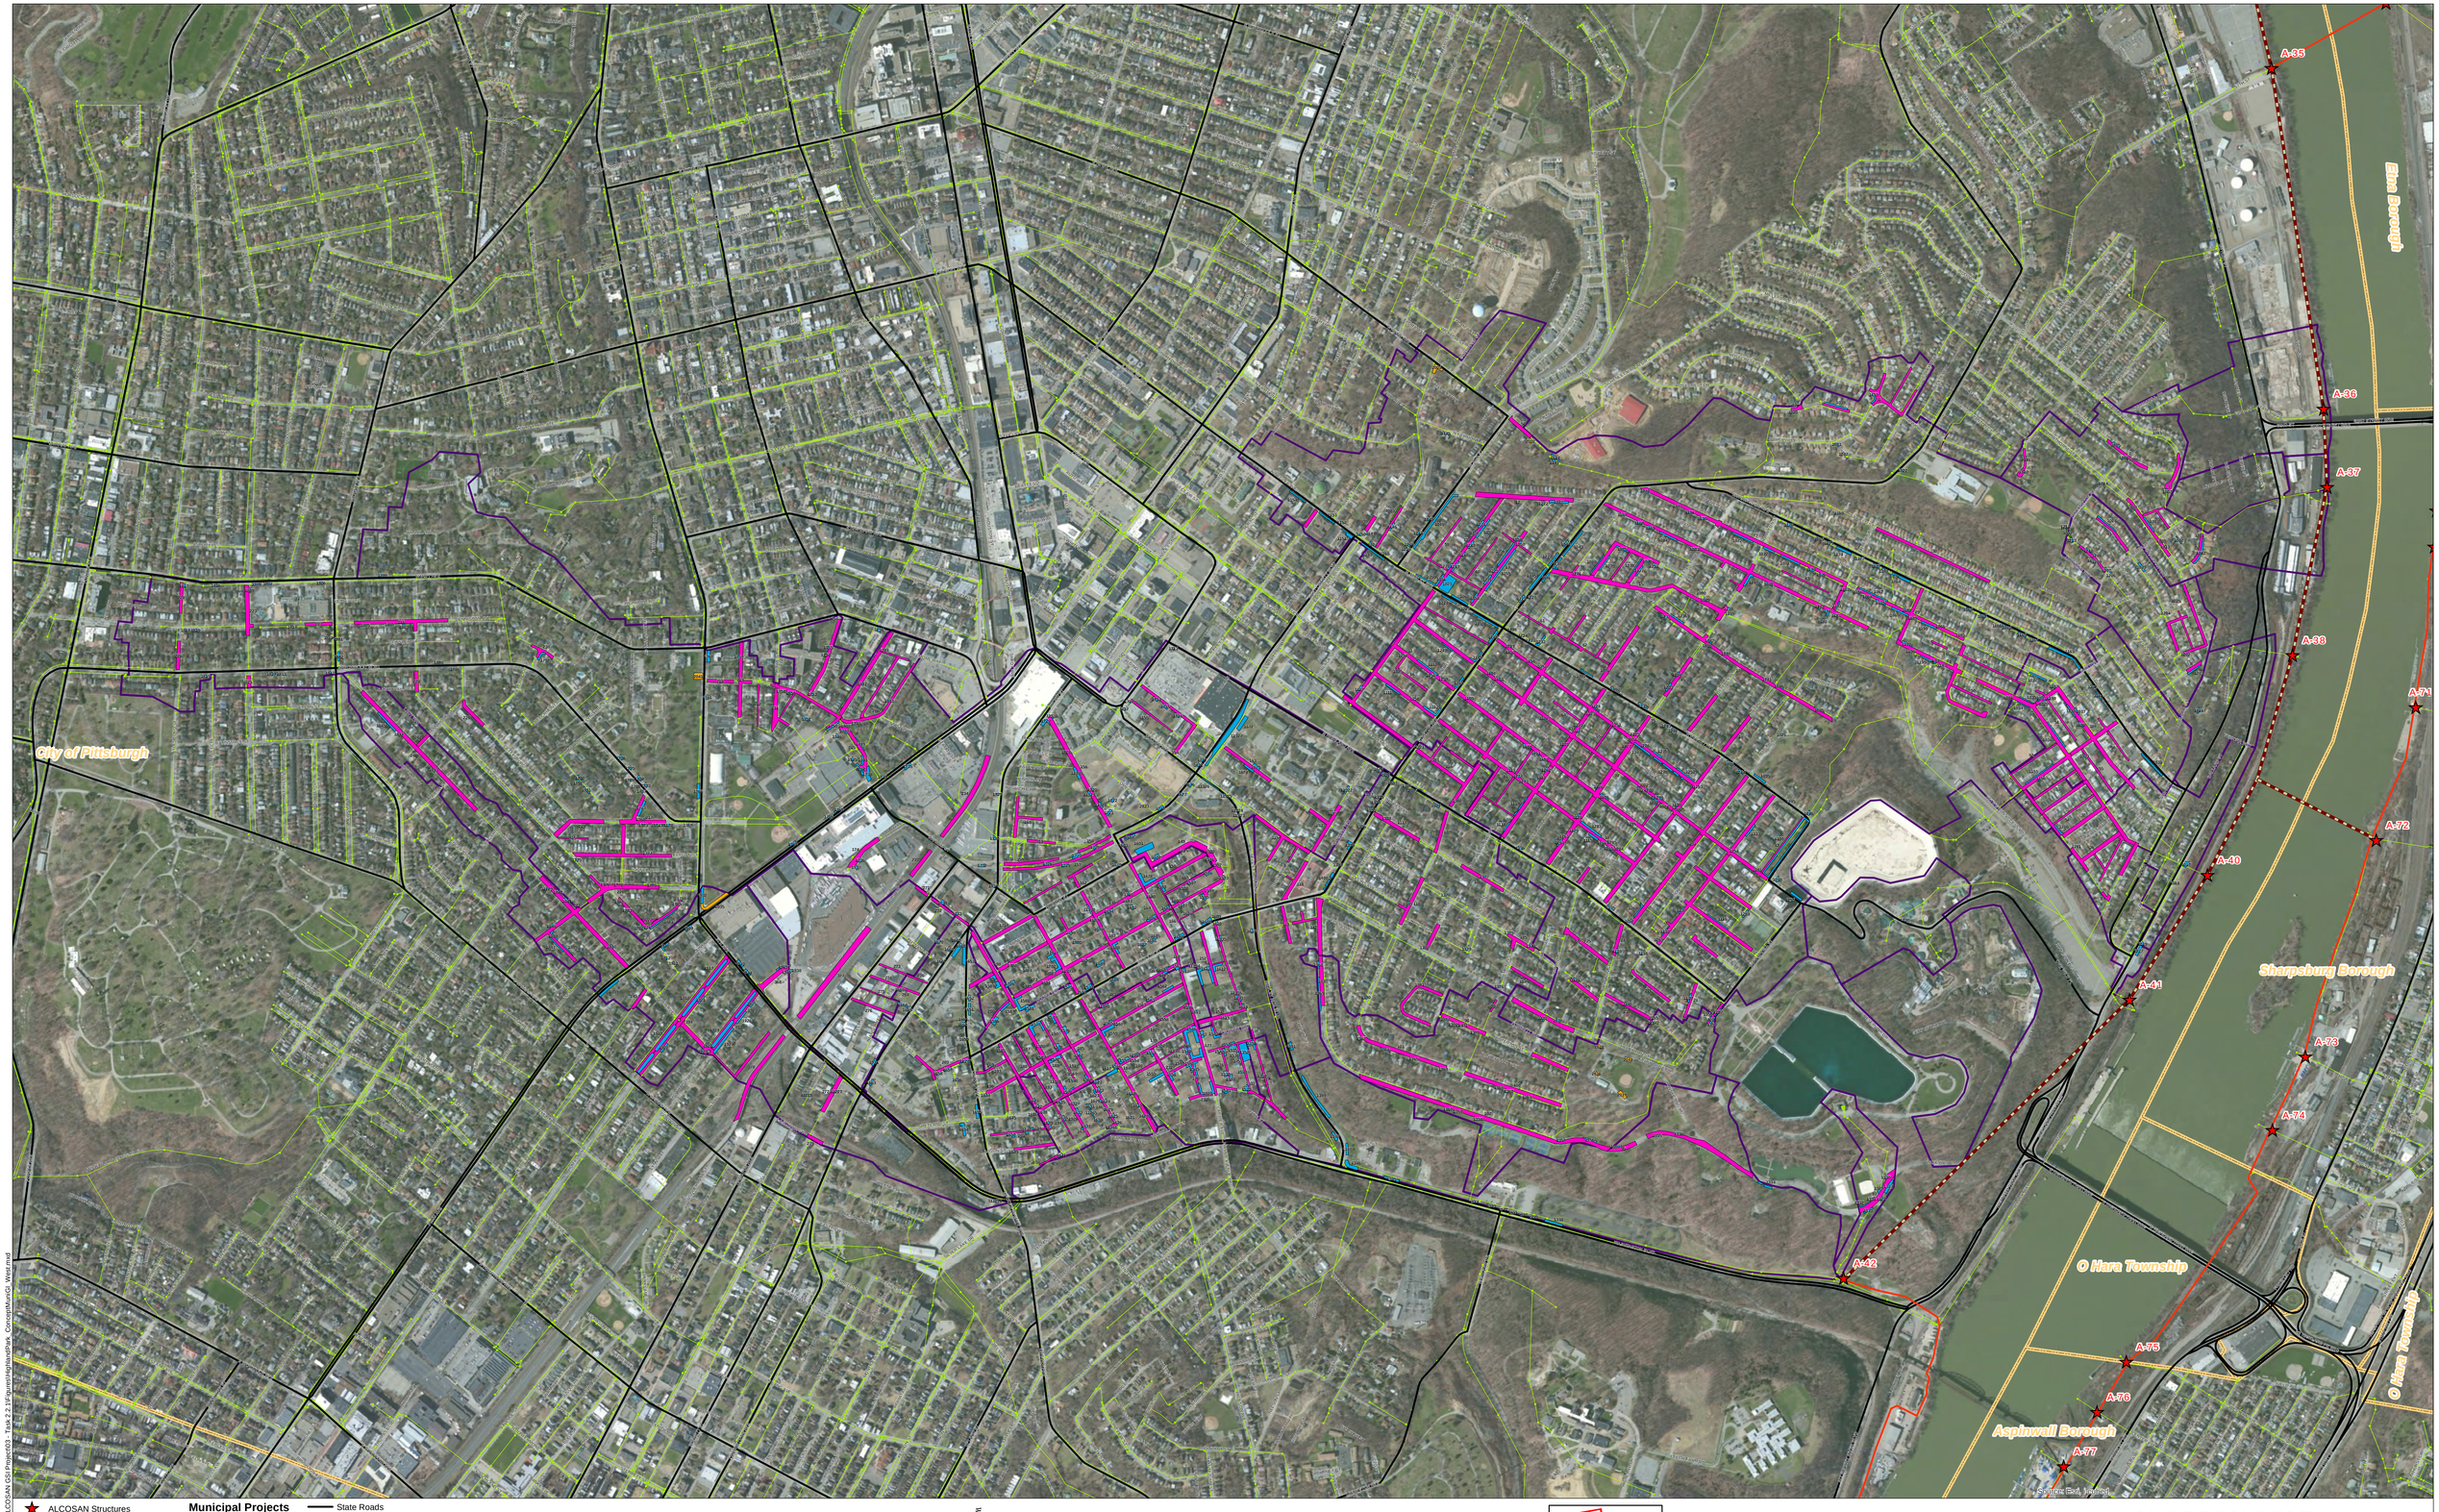

ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Municipal Projects
Infiltration Basin
Grass Swales
Vegetated Filter Strips
Bioretention
Permeable Pavement

State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

West

ALCOSAN GSI Project
Highland Park (A-36 thru A-42)
Concept Municipal GSI Projects

Path: N:\PROJ\3403\3405-05 ALCOSAN GSI Project\03 - Task 2.2-1\Figures\HighlandPark_ConceptMuniGI_West.mxd



ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines


Permeable Pavement Municipal Projects
Permeable Pavement Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 inch = 600 Feet

East

ALCOSAN GSI Project
Highland Park - East (A-36 thru A-42)
Concept Municipal Permeable Pavement GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\340-05 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\Mxd\Tm Drainage Areas\HighlandPark_PermeablePavement_IndividualDrainageAreas_East.mxd

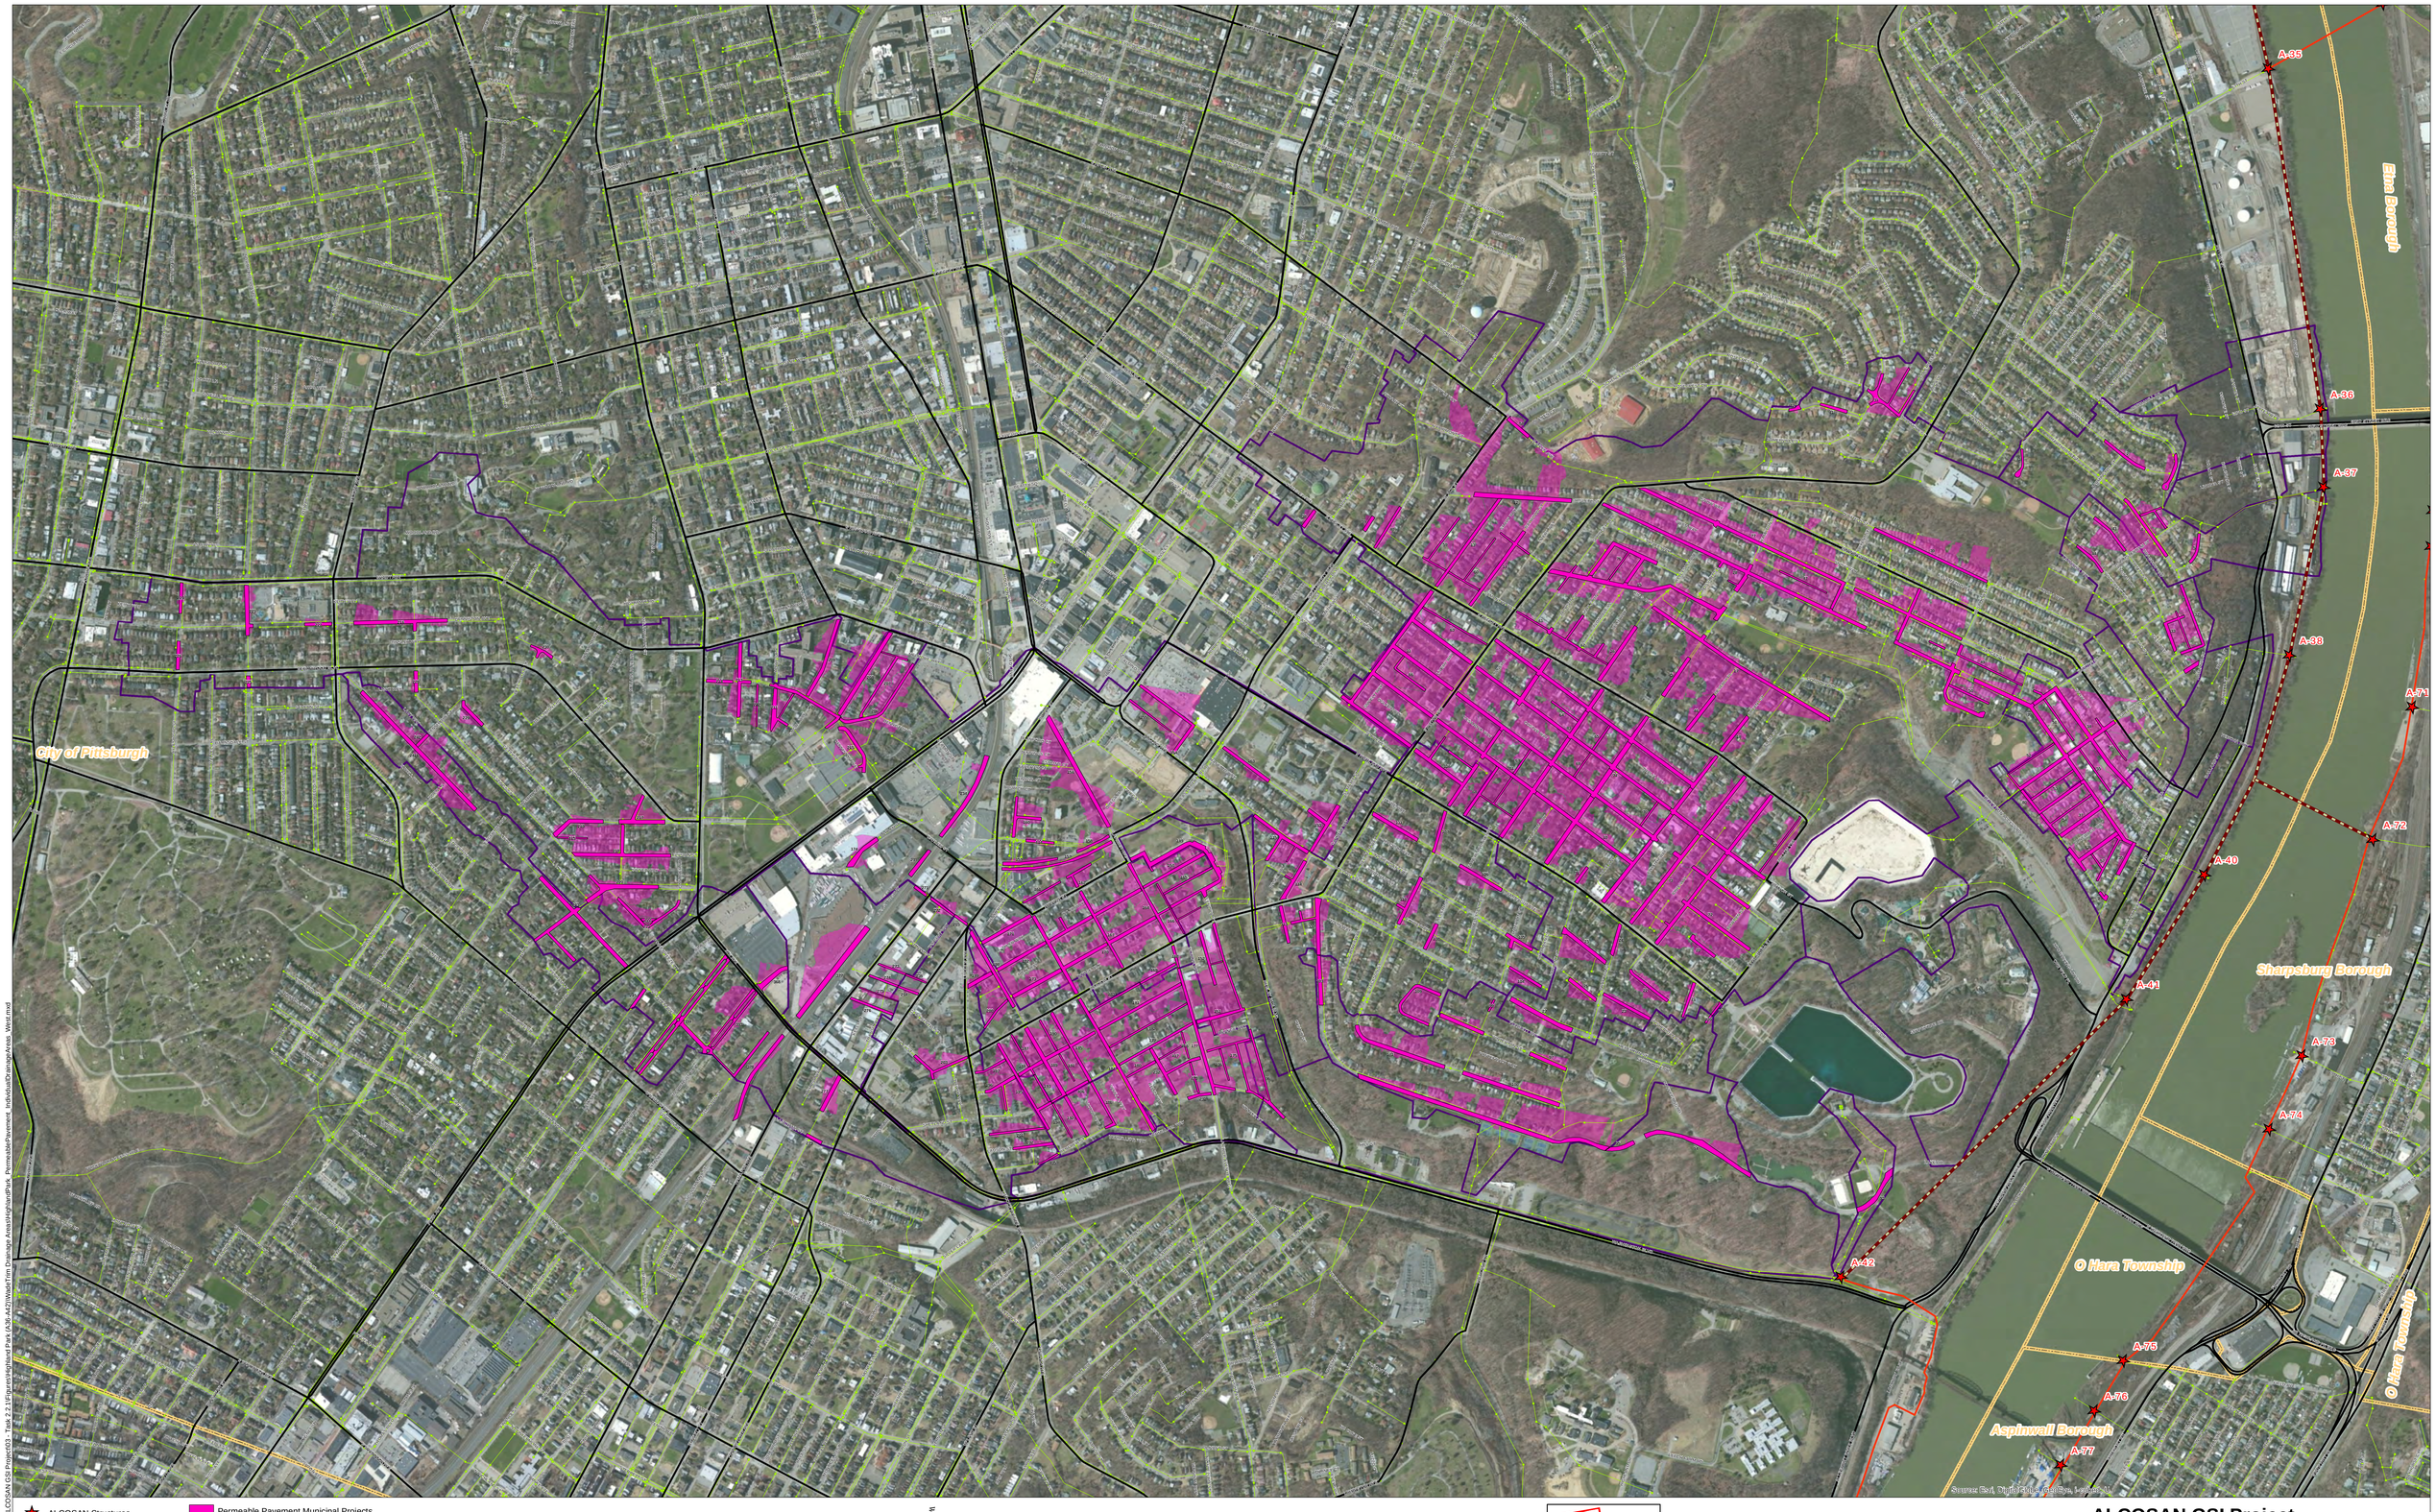

ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Permeable Pavement Municipal Projects
Permeable Pavement Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

West

ALCOSAN GSI Project
Highland Park - West (A-36 thru A-42)
Concept Municipal Permeable Pavement GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\346-06 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\Wade\Tim Drainage Areas\HighlandPark_PermeablePavement_IndividualDrainageAreas_West.mxd



ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Bioretention Municipal Projects
Bioretention Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

East

ALCOSAN GSI Project
Highland Park - East (A-36 thru A-42)
Concept Municipal Bioretention GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\340-05 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A35-A42)\Mxd\Tm Drainage Areas\HighlandPark_Bioretention_IndividualDrainageAreas_East.mxd



ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Bioretention Municipal Projects
Bioretention Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

West

ALCOSAN GSI Project
Highland Park - West (A-36 thru A-42)
Concept Municipal Bioretention GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\346-06 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\MapFrm Drainage Areas\HighlandPark_Bioretention_IndividualDrainageAreas_West.mxd



ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines


Infiltration Basin Municipal Projects
Infiltration Basin Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

East

ALCOSAN GSI Project
Highland Park - East (A-36 thru A-42)
Concept Municipal Infiltration Basin GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\340-05 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\Mxd\Tm Drainage Areas\HighlandPark_InfiltrationBasin_IndividualDrainageAreas_East.mxd

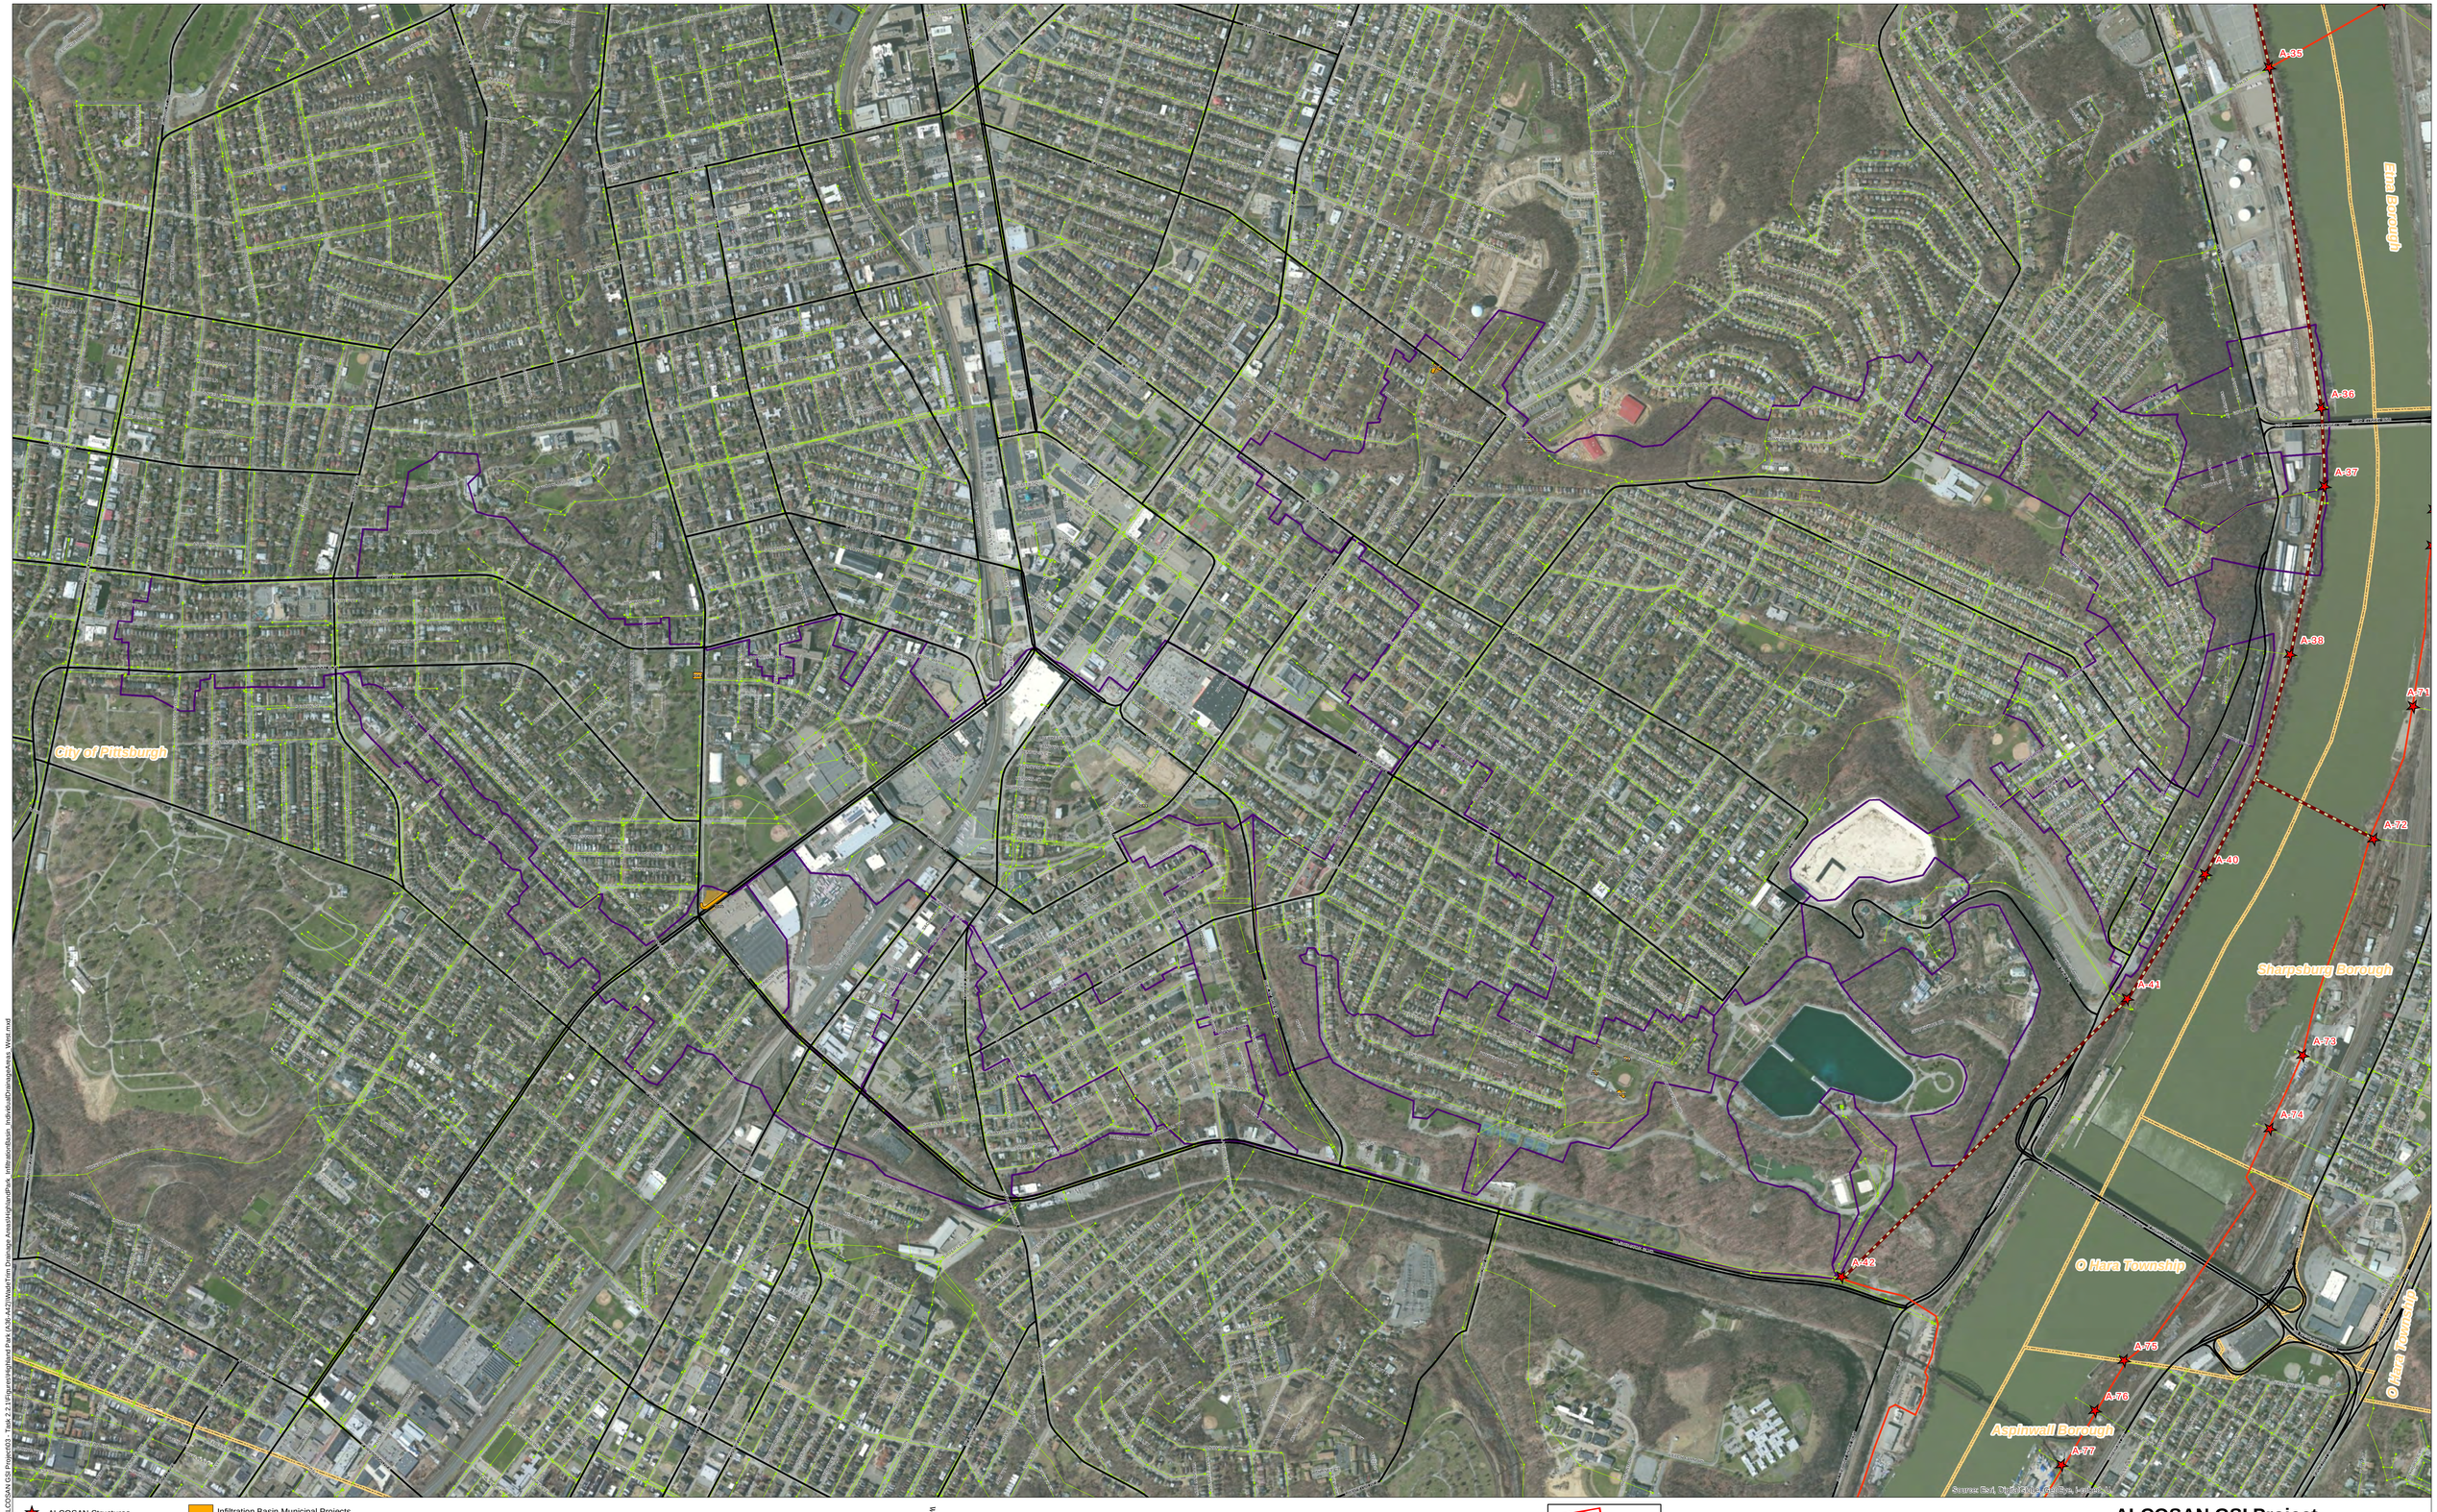

ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Infiltration Basin Municipal Projects
Infiltration Basin Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries


N
W
E
S

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

West

ALCOSAN GSI Project
Highland Park - West (A-36 thru A-42)
Concept Municipal Infiltration Basin GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\3405\3405-06 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\MapFrm Drainage Areas\HighlandPark_InfiltrationBasin_IndividualDrainageAreas_West.mxd

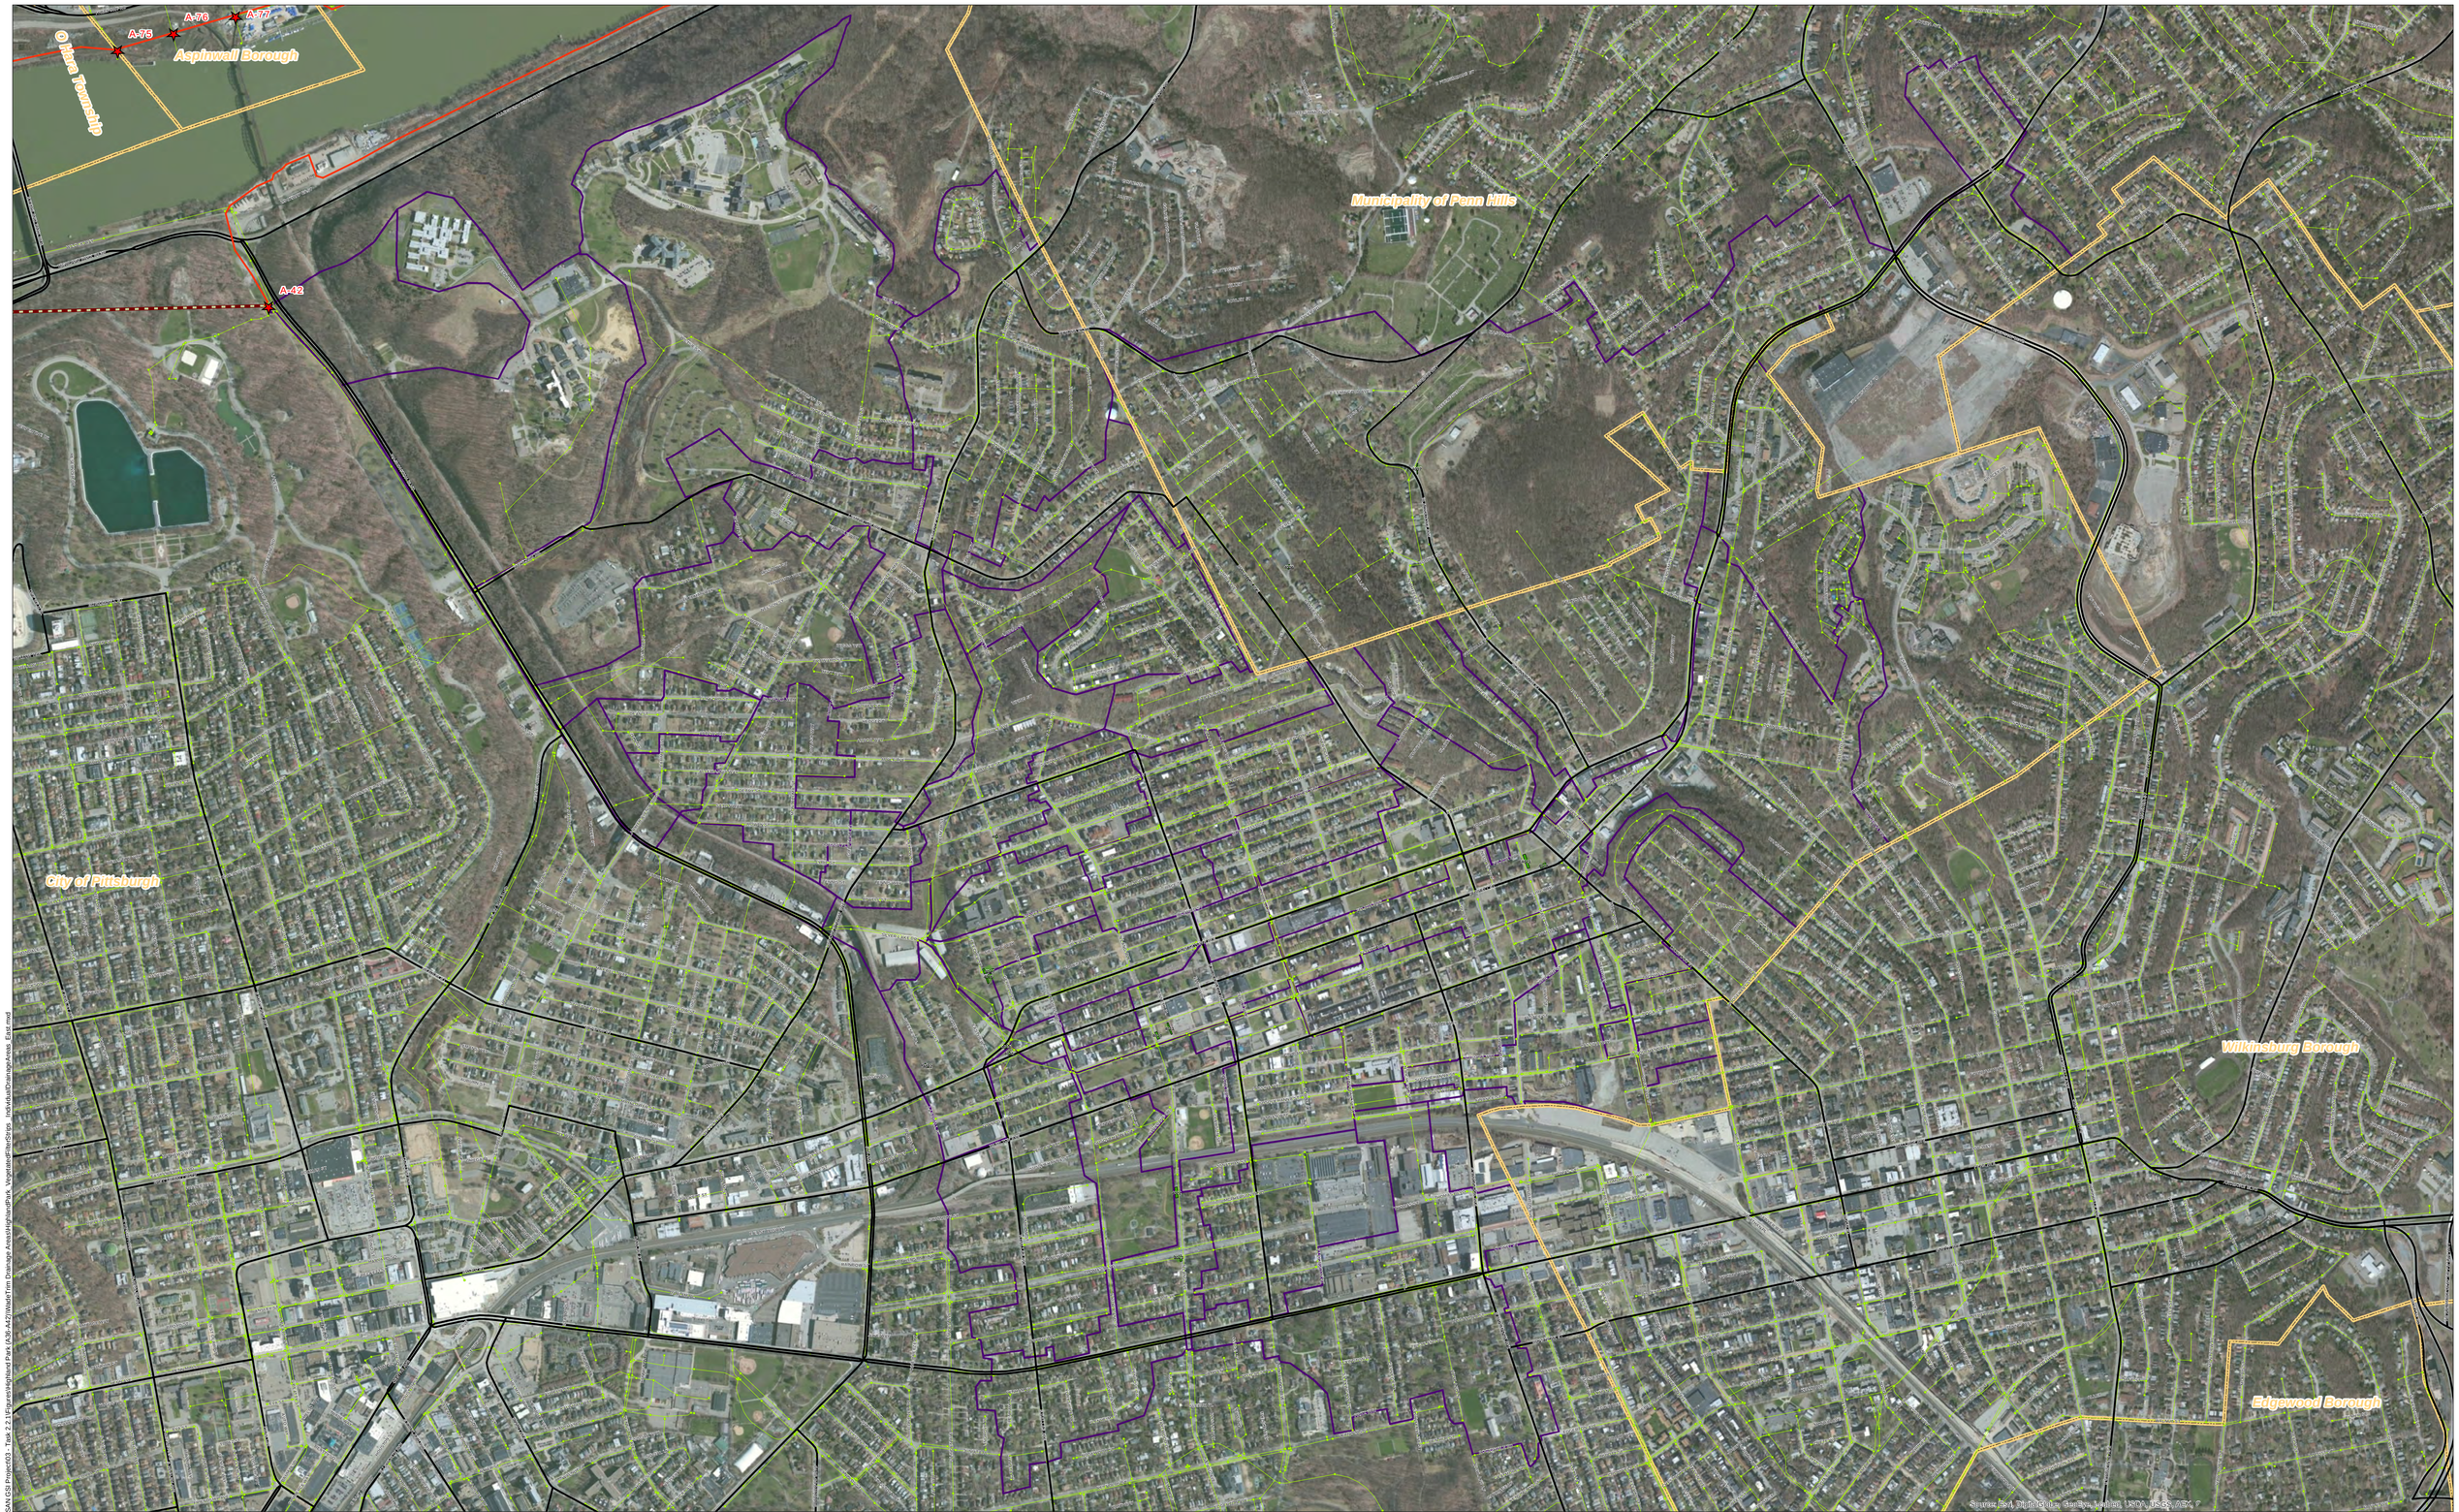

ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines


Vegetated Filter Strips Municipal Projects
Vegetated Filter Strips Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

East

ALCOSAN GSI Project
Highland Park - East (A-36 thru A-42)
Concept Municipal Vegetated Filter Strips GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\340-05 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\Mxd\Tm Drainage Areas\HighlandPark_VegetatedFilterStrips_IndividualDrainageAreas_East.mxd

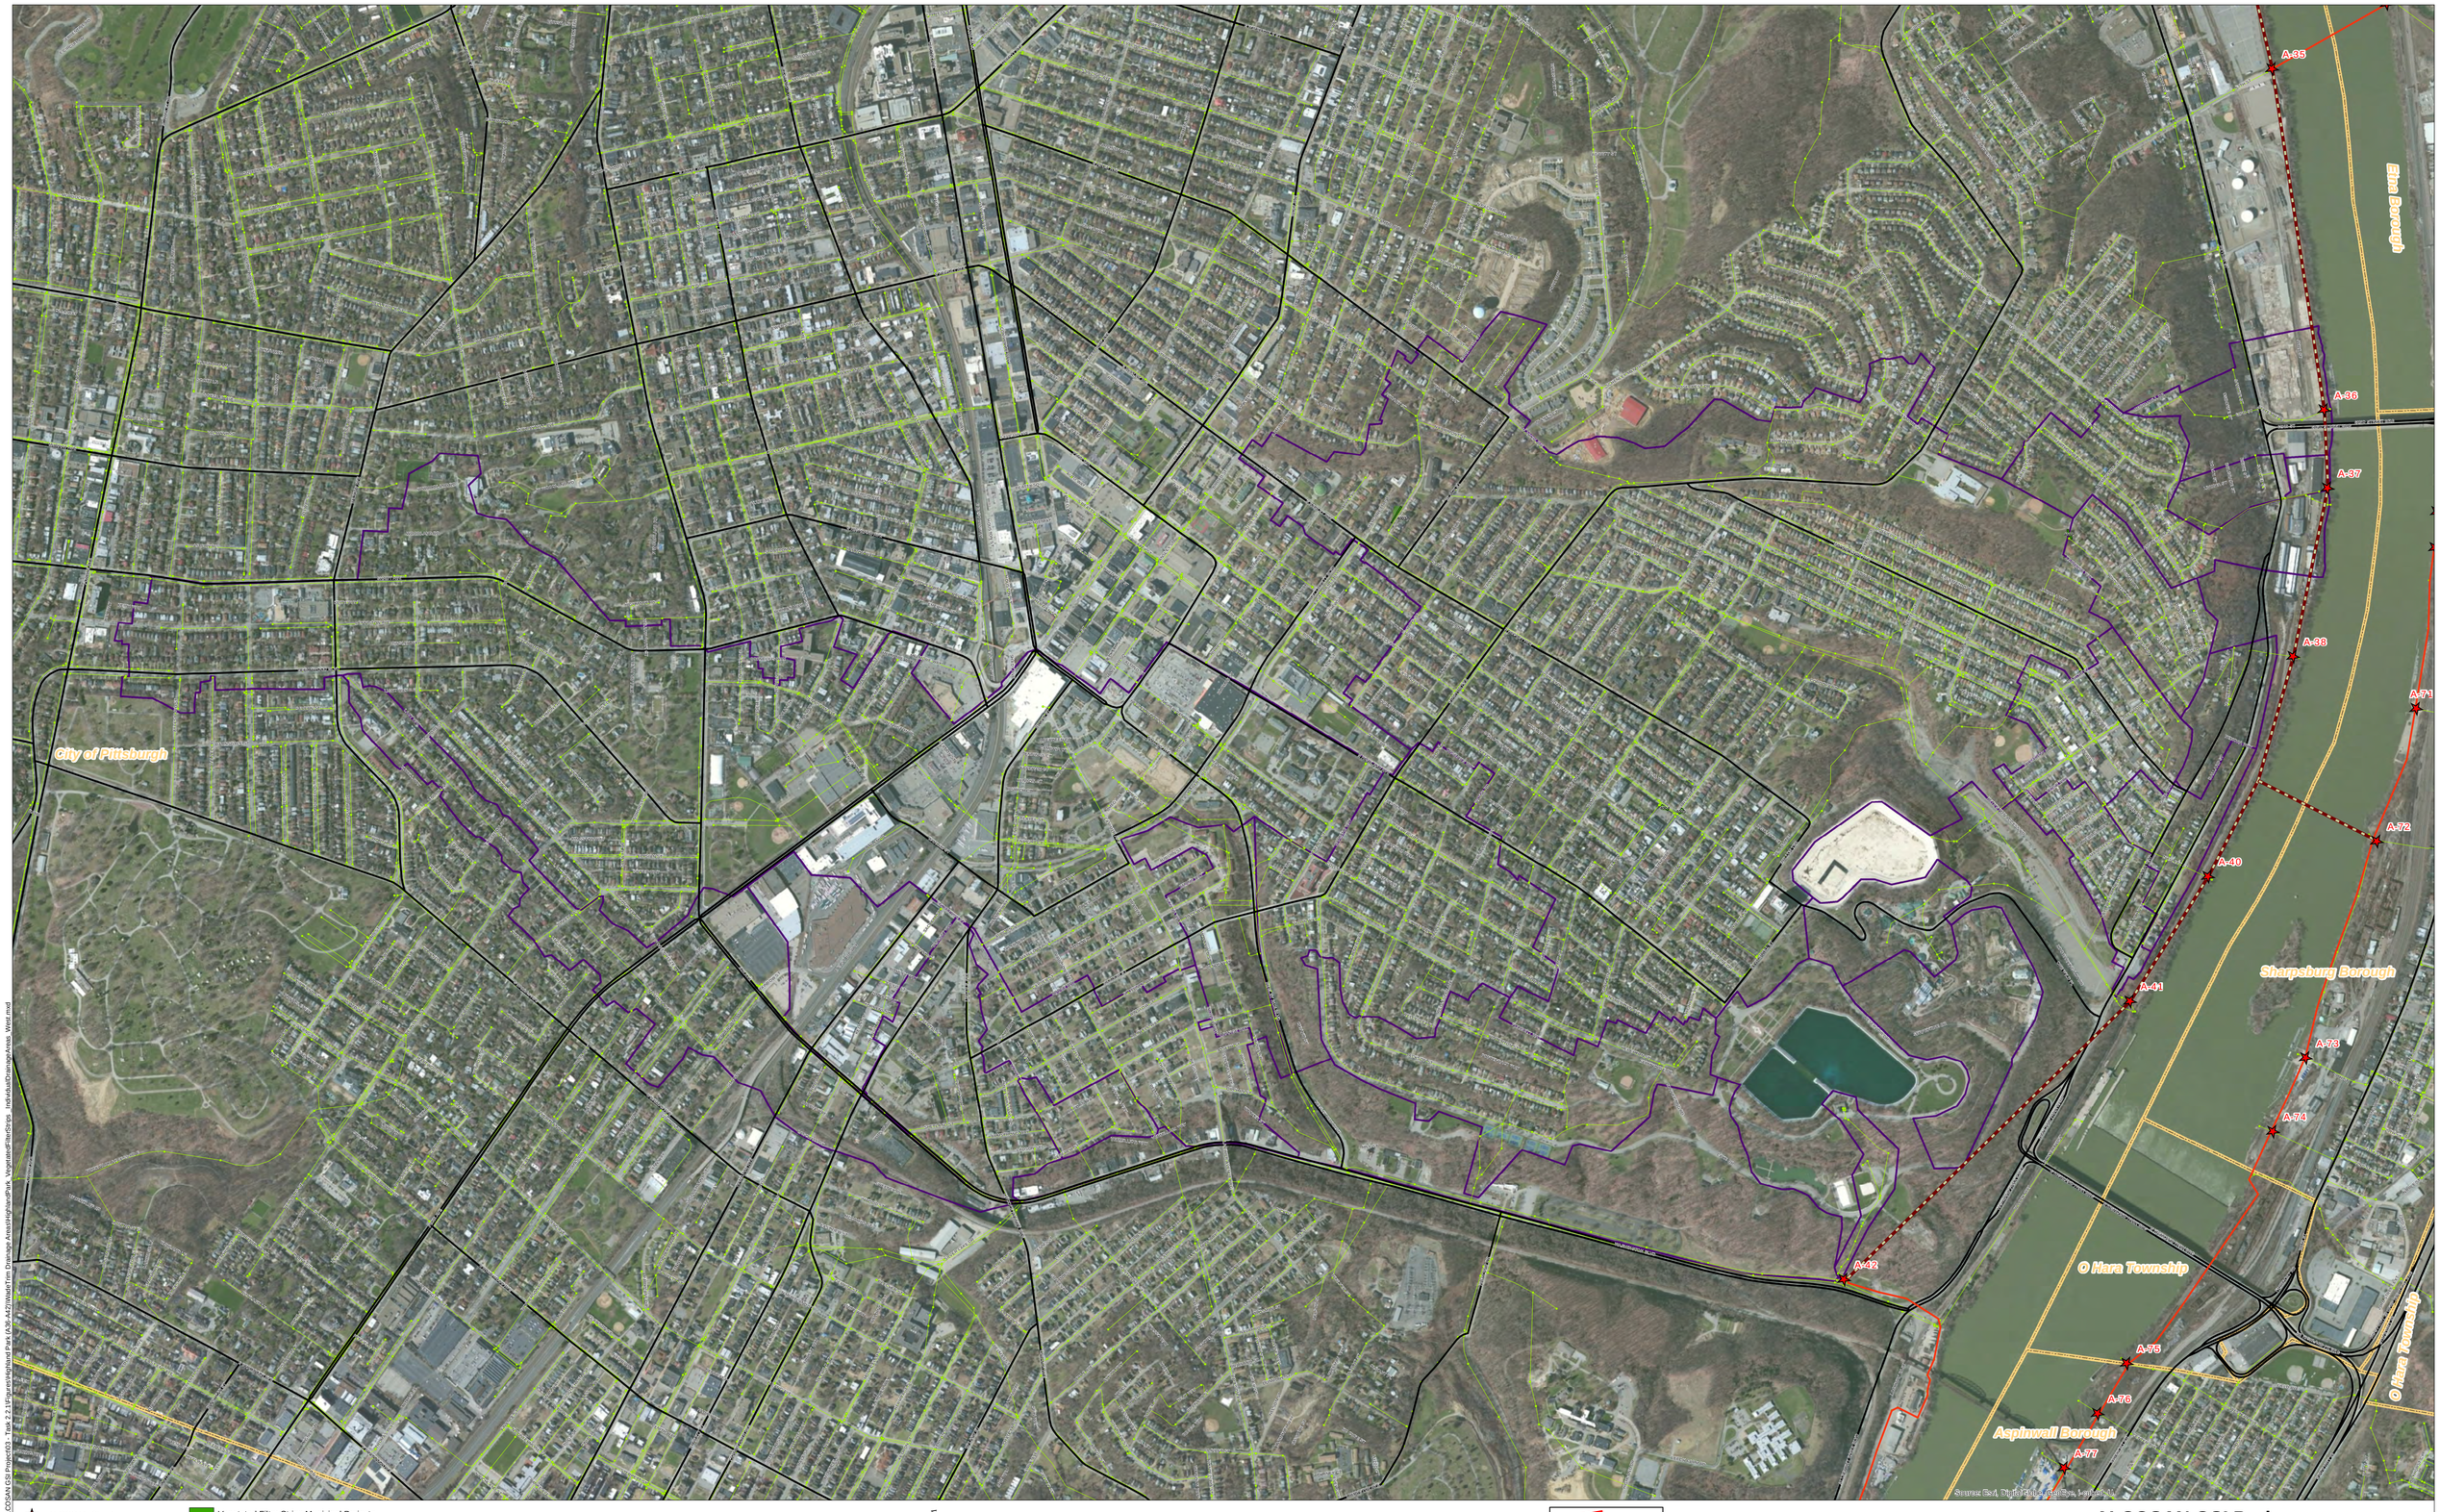

ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Vegetated Filter Strips Municipal Projects
Vegetated Filter Strips Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

West

ALCOSAN GSI Project
Highland Park - West (A-36 thru A-42)
Concept Municipal Vegetated Filter Strips GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\3403\05 ALCOSAN GSI Project\03 - Task 2.1\Figures\Highland Park (A36-A42)\WestTrim Drainage Areas\HighlandPark_VegetatedFilterStrips_IndividualDrainageAreas_West.mxd



ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines


Grass Swales Municipal Projects
Grass Swales Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 inch = 600 Feet

East

ALCOSAN GSI Project
Highland Park - East (A-36 thru A-42)
Concept Municipal Grass Swales GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\340-05 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\Mxd\Tim Drainage Areas\HighlandPark_GrassSwales_IndvidualDrainageAreas_East.mxd

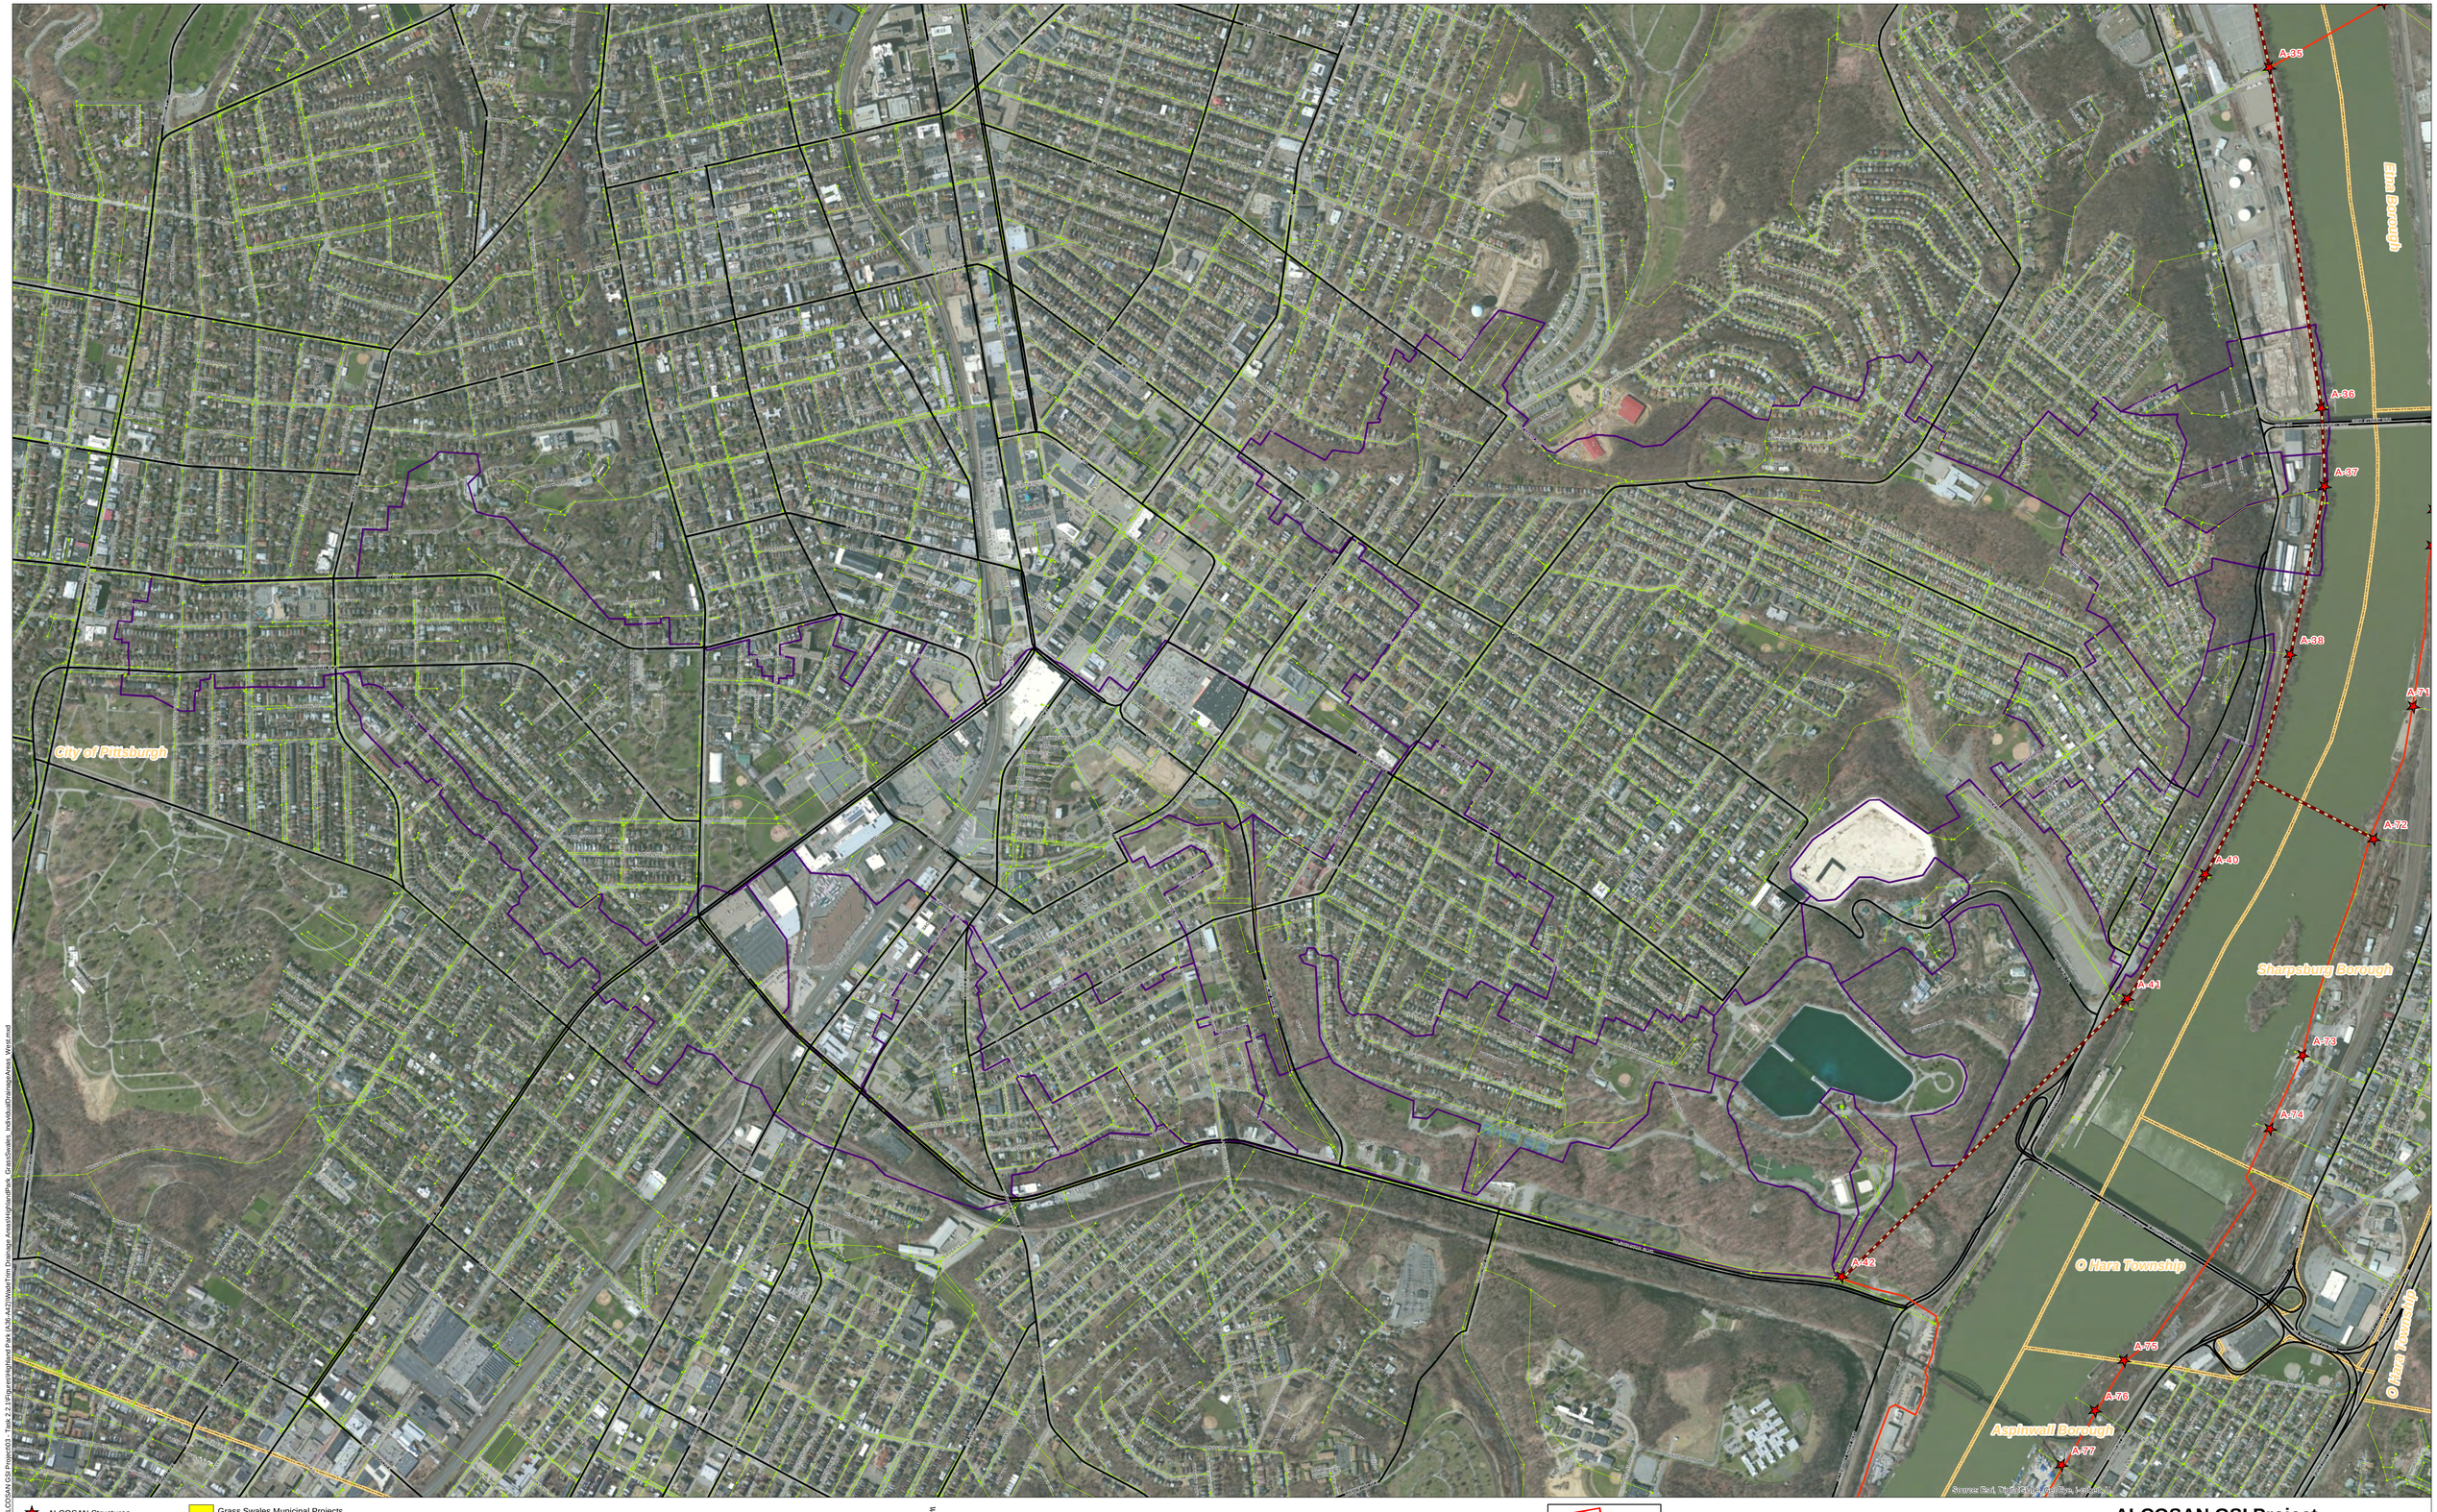

ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
One Overall Manholes
One Overall Sewerlines

Grass Swales Municipal Projects
Grass Swales Drainage Areas
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

West

ALCOSAN GSI Project
Highland Park - West (A-36 thru A-42)
Concept Municipal Grass Swales GSI Projects
Individual Project Drainage Areas

Path: N:\PROJ\340\346-06 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\Highland Park (A36-A42)\Mxd\Fnl Drainage Areas\HighlandPark_GrassSwales_IndividualDrainageAreas_West.mxd

Highland Park Concept Commercial / Institutional Permeable Pavement, Green Roof, and Special Case GSI Projects: Summary Table

February 21, 2014
Revised October 10, 2014

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-41-00	HR002_C1	HIPK_6001	CPP	0.330	0.000	0.319	0.000	0.011
A-41-00	HR002_C1	HIPK_6002	CPP	0.288	0.287	0.000	0.000	0.001
A-41-00	HR002_C1	HIPK_6003	CPP	0.935	0.000	0.922	0.000	0.013
A-41-00	HR001_C2	HIPK_6004	CPP	0.113	0.105	0.000	0.000	0.008
A-41-00	HR001_C2	HIPK_6005	CPP	0.141	0.000	0.041	0.000	0.100
A-41-00	HR001_C2	HIPK_6006	CPP	0.036	0.000	0.035	0.000	0.001
A-41-00	HR002_C1	HIPK_6007	CPP	0.080	0.080	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_6008	CPP	0.079	0.078	0.000	0.000	0.001
A-41-00	HR002_C1	HIPK_6009	CPP	0.125	0.000	0.125	0.000	0.000
A-41-00	HR002_C1	HIPK_6010	CPP	0.162	0.000	0.162	0.000	0.000
A-41-00	HR001_C2	HIPK_6011	CPP	0.060	0.056	0.000	0.000	0.004
A-41-00	A41IN_C1	HIPK_6012	CPP	0.177	0.011	0.022	0.000	0.144
A-41-00	A41IN_C1	HIPK_6013	CPP	0.227	0.013	0.016	0.000	0.198
A-37-00	INT_A37A_C1	HIPK_6014	CPP	0.365	0.000	0.365	0.000	0.000
A-41-00	HR001_C2	HIPK_6015	CPP	0.033	0.032	0.000	0.000	0.001
A-41-00	HR002_C1	HIPK_6016	CPP	0.232	0.000	0.231	0.000	0.001
A-41-00	HR002_C1	HIPK_6017	CPP	0.216	0.000	0.216	0.000	0.000
A-41-00	HR001_C1	HIPK_6018	CPP	0.177	0.000	0.177	0.000	0.000
A-41-00	HRZOO_C1	HIPK_6019	CPP	0.252	0.000	0.252	0.000	0.000
A-41-00	HR002_C1	HIPK_6020	CPP	0.334	0.329	0.000	0.000	0.005
A-41-00	HR002_C1	HIPK_6021	CPP	0.144	0.135	0.000	0.000	0.009
A-41-00	HR002_C1	HIPK_6022	CPP	0.032	0.000	0.031	0.000	0.001
A-41-00	HR002_C1	HIPK_6023	CPP	0.201	0.000	0.115	0.000	0.086
A-41-00	HR002_C1	HIPK_6024	CPP	0.151	0.050	0.000	0.000	0.101
A-41-00	HR002_C1	HIPK_6025	CPP	0.058	0.054	0.000	0.000	0.004

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-41-00	HR002_C1	HIPK_6026	CPP	0.187	0.165	0.000	0.000	0.022
A-41-00	HR001_C2	HIPK_6027	CPP	0.350	0.004	0.346	0.000	0.000
A-41-00	HR002_C1	HIPK_6028	CPP	0.068	0.000	0.068	0.000	0.000
A-42-00	PennHills_A-42	HIPK_6029	CPP	0.642	0.000	0.599	0.000	0.043
A-42-00	PennHills_A-42	HIPK_6030	CPP	6.004	4.940	1.045	0.000	0.019
A-42-00	PennHills_A-42	HIPK_6031	CPP	0.073	0.000	0.052	0.000	0.021
A-42-00	PennHills_A-42	HIPK_6032	CPP	1.142	1.114	0.000	0.000	0.028
A-42-00	PennHills_A-42	HIPK_6033	CPP	0.346	0.172	0.000	0.000	0.174
A-42-00	PennHills_A-42	HIPK_6034	CPP	0.093	0.000	0.093	0.000	0.000
A-42-00	A4200__-POC-L-01_C1	HIPK_6035	CPP	0.774	0.000	0.774	0.000	0.000
A-42-00	A4200__-POC-L-01_C1	HIPK_6036	CPP	0.603	0.000	0.415	0.000	0.188
A-42-00	A4200__-POC-L-01_C1	HIPK_6037	CPP	0.278	0.000	0.278	0.000	0.000
A-42-00	A4200__-POC-L-01_C1	HIPK_6038	CPP	0.733	0.000	0.558	0.000	0.175
A-42-00	A4200__-POC-L-01_C1	HIPK_6039	CPP	0.302	0.223	0.000	0.000	0.079
A-42-00	A4200__-POC-L-02_C2	HIPK_6040	CPP	0.636	0.000	0.636	0.000	0.000
A-42-00	A4200__-POC-L-02_C2	HIPK_6041	CPP	0.377	0.000	0.335	0.000	0.042
A-42-00	A4200__-POC-L-02_C2	HIPK_6042	CPP	0.871	0.000	0.871	0.000	0.000
A-42-00	A4200__-POC-L-02_C2	HIPK_6043	CPP	0.491	0.000	0.491	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6044	CPP	0.660	0.000	0.650	0.000	0.010
A-42-00	A4200__-POC-L-02_C3	HIPK_6045	CPP	0.162	0.162	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C10	HIPK_6046	CPP	0.260	0.260	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C10	HIPK_6047	CPP	0.125	0.125	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C11	HIPK_6048	CPP	0.606	0.606	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6049	CPP	0.407	0.000	0.407	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6050	CPP	0.183	0.001	0.182	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6051	CPP	3.586	3.584	0.000	0.000	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_6052	CPP	0.188	0.142	0.004	0.000	0.042
A-42-00	A4200__-POC-L-01_C3	HIPK_6053	CPP	0.197	0.000	0.197	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6054	CPP	0.564	0.000	0.110	0.000	0.454
A-42-00	A4200__-POC-L-01_C3	HIPK_6055	CPP	0.075	0.000	0.075	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-POC-L-01_C3	HIPK_6056	CPP	1.524	0.000	0.296	0.002	1.226
A-42-00	A4200__-POC-L-01_C3	HIPK_6057	CPP	0.265	0.000	0.075	0.000	0.190
A-42-00	A4200__-POC-L-01_C3	HIPK_6058	CPP	4.976	0.405	0.001	0.000	4.570
A-42-00	A4200__-POC-L-01_C3	HIPK_6059	CPP	0.188	0.068	0.114	0.000	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_6060	CPP	0.114	0.114	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6061	CPP	0.185	0.179	0.000	0.000	0.006
A-42-00	A4200__-POC-L-01_C3	HIPK_6062	CPP	0.214	0.037	0.000	0.000	0.177
A-42-00	A4200__-POC-L-01_C3	HIPK_6063	CPP	0.552	0.005	0.000	0.000	0.547
A-42-00	A4200__-POC-L-01_C3	HIPK_6064	CPP	1.233	0.019	0.000	1.212	0.002
A-42-00	A4200__-POC-L-01_C5	HIPK_6065	CPP	0.048	0.006	0.000	0.000	0.042
A-42-00	A4200__-POC-L-01_C5	HIPK_6066	CPP	0.365	0.239	0.000	0.000	0.126
A-42-00	A4200__-POC-L-01_C5	HIPK_6067	CPP	0.175	0.162	0.000	0.000	0.013
A-42-00	A4200__-MM_-L-04_C15	HIPK_6068	CPP	0.159	0.024	0.054	0.000	0.081
A-42-00	A4200__-POC-L-01_C5	HIPK_6069	CPP	0.107	0.028	0.000	0.000	0.079
A-42-00	A4200__-MM_-L-04_C15	HIPK_6070	CPP	0.248	0.000	0.000	0.000	0.248
A-42-00	A4200__-MM_-L-04_C15	HIPK_6071	CPP	0.394	0.053	0.000	0.000	0.341
A-42-00	A4200__-MM_-L-04_C15	HIPK_6072	CPP	0.107	0.000	0.107	0.000	0.000
A-42-00	A4200__-MM_-L-04_C15	HIPK_6073	CPP	0.174	0.017	0.156	0.000	0.001
A-42-00	A4200__-MM_-L-04_C15	HIPK_6074	CPP	0.219	0.219	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C15	HIPK_6075	CPP	0.262	0.000	0.262	0.000	0.000
A-42-00	A4200__-MM_-L-04_C15	HIPK_6076	CPP	0.210	0.000	0.003	0.000	0.207
A-42-00	A4200__-MM_-L-04_C15	HIPK_6077	CPP	0.394	0.394	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-03_C2	HIPK_6078	CPP	0.071	0.064	0.000	0.000	0.007
A-42-00	A4200__-MM_-L-03_C2	HIPK_6079	CPP	0.052	0.052	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6080	CPP	0.355	0.000	0.355	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6081	CPP	0.822	0.000	0.822	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6082	CPP	0.275	0.000	0.275	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6083	CPP	0.378	0.000	0.378	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6084	CPP	0.560	0.000	0.560	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_6085	CPP	0.900	0.000	0.900	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-04_C17	HIPK_6086	CPP	0.845	0.000	0.845	0.000	0.000
A-42-00	A4200__-MM_-L-04_C17	HIPK_6087	CPP	2.980	2.980	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_6088	CPP	0.304	0.001	0.303	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_6089	CPP	0.894	0.085	0.065	0.000	0.744
A-42-00	A4200__-MM_-L-04_C16	HIPK_6090	CPP	0.580	0.000	0.576	0.000	0.004
A-42-00	A4200__-MM_-L-04_C16	HIPK_6091	CPP	0.331	0.191	0.000	0.000	0.140
A-42-00	A4200__-MM_-L-04_C16	HIPK_6092	CPP	0.166	0.161	0.000	0.000	0.005
A-42-00	A4200__-MM_-L-04_C16	HIPK_6093	CPP	0.250	0.242	0.000	0.000	0.008
A-42-00	A4200__-MM_-L-04_C16	HIPK_6094	CPP	0.104	0.012	0.000	0.000	0.092
A-42-00	A4200__-MM_-L-04_C15	HIPK_6095	CPP	0.062	0.048	0.000	0.000	0.014
A-42-00	A4200__-MM_-L-04_C16	HIPK_6096	CPP	0.142	0.139	0.000	0.000	0.003
A-42-00	A4200__-MM_-L-04_C16	HIPK_6097	CPP	0.251	0.224	0.000	0.000	0.027
A-42-00	A4200__-MM_-L-04_C16	HIPK_6098	CPP	0.138	0.103	0.000	0.000	0.035
A-42-00	A4200__-MM_-L-04_C17	HIPK_6099	CPP	0.175	0.167	0.000	0.000	0.008
A-42-00	A4200__-MM_-L-04_C17	HIPK_6100	CPP	0.101	0.101	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C17	HIPK_6101	CPP	0.228	0.225	0.000	0.000	0.003
A-42-00	A4200__-MM_-L-04_C17	HIPK_6102	CPP	0.522	0.522	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C17	HIPK_6103	CPP	0.410	0.370	0.002	0.000	0.038
A-42-00	A4200__-MM_-L-04_C9	HIPK_6104	CPP	0.328	0.000	0.281	0.000	0.047
A-42-00	A4200__-MM_-L-04_C9	HIPK_6105	CPP	0.328	0.318	0.010	0.000	0.000
A-42-00	A4200__-MM_-L-06_C1	HIPK_6106	CPP	0.317	0.000	0.317	0.000	0.000
A-42-00	A4200__-MM_-L-04_C12	HIPK_6107	CPP	0.480	0.000	0.053	0.000	0.427
A-42-00	A4200__-MM_-L-04_C13	HIPK_6108	CPP	0.192	0.000	0.005	0.000	0.187
A-42-00	A4200__-MM_-L-06_C1	HIPK_6109	CPP	0.074	0.070	0.000	0.000	0.004
A-42-00	A4200__-MM_-L-07_C16	HIPK_6110	CPP	0.189	0.188	0.000	0.000	0.001
A-42-00	A4200__-IM_-L-05_C1	HIPK_6111	CPP	0.456	0.000	0.304	0.000	0.152
A-42-00	A4200__-IM_-L-05_C2	HIPK_6112	CPP	0.048	0.000	0.008	0.000	0.040
A-42-00	A4200__-IM_-L-05_C2	HIPK_6113	CPP	0.110	0.108	0.000	0.000	0.002
A-42-00	A4200__-IM_-L-05_C2	HIPK_6114	CPP	0.213	0.000	0.142	0.000	0.071
A-42-00	A4200__-IM_-L-05_C2	HIPK_6115	CPP	0.147	0.147	0.000	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-IM_-L-05_C2	HIPK_6116	CPP	0.122	0.045	0.011	0.000	0.066
A-42-00	A4200__-IM_-L-05_C2	HIPK_6117	CPP	0.157	0.152	0.000	0.000	0.005
A-42-00	A4200__-IM_-L-05_C3	HIPK_6118	CPP	0.292	0.009	0.017	0.000	0.266
A-42-00	A4200__-IM_-L-05_C6	HIPK_6119	CPP	0.048	0.000	0.021	0.000	0.027
A-42-00	A4200__-MM_-L-07_C2	HIPK_6120	CPP	0.447	0.000	0.064	0.000	0.383
A-42-00	A4200__-MM_-L-07_C2	HIPK_6121	CPP	0.163	0.000	0.163	0.000	0.000
A-42-00	A4200__-MM_-L-07_C2	HIPK_6122	CPP	0.104	0.000	0.099	0.000	0.005
A-42-00	A4200__-MM_-L-07_C2	HIPK_6123	CPP	0.161	0.000	0.156	0.000	0.005
A-42-00	A4200__-IM_-L-05_C7	HIPK_6124	CPP	0.170	0.168	0.000	0.000	0.002
A-42-00	A4200__-IM_-L-05_C6	HIPK_6125	CPP	0.226	0.004	0.193	0.000	0.029
A-42-00	A4200__-IM_-L-05_C7	HIPK_6126	CPP	0.278	0.000	0.278	0.000	0.000
A-42-00	A4200__-IM_-L-05_C7	HIPK_6127	CPP	0.341	0.000	0.341	0.000	0.000
A-42-00	A4200__-IM_-L-05_C7	HIPK_6128	CPP	0.185	0.054	0.001	0.000	0.130
A-42-00	A4200__-IM_-L-05_C7	HIPK_6129	CPP	0.163	0.013	0.000	0.000	0.150
A-42-00	A4200__-IM_-L-05_C6	HIPK_6130	CPP	0.241	0.000	0.239	0.000	0.002
A-42-00	A4200__-IM_-L-05_C7	HIPK_6131	CPP	0.026	0.000	0.006	0.000	0.020
A-42-00	A4200__-IM_-L-05_C8	HIPK_6132	CPP	1.856	0.000	1.856	0.000	0.000
A-42-00	A4200__-IM_-L-05_C8	HIPK_6133	CPP	0.131	0.000	0.090	0.000	0.041
A-42-00	A4200__-IM_-L-05_C8	HIPK_6134	CPP	0.338	0.000	0.338	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_6135	CPP	0.737	0.737	0.000	0.000	0.000
A-42-00	A4200__-IM_-L-05_C8	HIPK_6136	CPP	0.801	0.000	0.030	0.000	0.771
A-42-00	A4200__-IM_-L-05_C8	HIPK_6137	CPP	1.267	0.000	1.267	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_6138	CPP	1.012	0.000	1.012	0.000	0.000
A-42-00	A4200__-MM_-L-07_C18	HIPK_6139	CPP	0.770	0.770	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_6140	CPP	0.107	0.105	0.000	0.000	0.002
A-42-00	A4200__-MM_-L-07_C1	HIPK_6141	CPP	0.428	0.010	0.000	0.000	0.418
A-42-00	A4200__-MM_-L-07_C1	HIPK_6142	CPP	0.392	0.047	0.000	0.000	0.345
A-42-00	A4200__-MM_-L-07_C1	HIPK_6143	CPP	0.269	0.264	0.000	0.000	0.005
A-42-00	A4200__-MM_-L-07_C1	HIPK_6144	CPP	0.134	0.081	0.000	0.000	0.053
A-42-00	A4200__-MM_-L-07_C1	HIPK_6145	CPP	0.257	0.000	0.256	0.000	0.001

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-07_C1	HIPK_6146	CPP	0.474	0.005	0.000	0.000	0.469
A-42-00	A4200__-MM_-L-07_C1	HIPK_6147	CPP	0.145	0.132	0.000	0.000	0.013
A-42-00	A4200__-MM_-L-07_C1	HIPK_6148	CPP	0.547	0.543	0.000	0.000	0.004
A-42-00	A4200__-MM_-L-07_C1	HIPK_6149	CPP	0.125	0.115	0.000	0.000	0.010
A-42-00	A4200__-MM_-L-07_C1	HIPK_6150	CPP	0.096	0.096	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_6151	CPP	0.288	0.279	0.000	0.000	0.009
A-42-00	A4200__-MM_-L-07_C1	HIPK_6152	CPP	0.120	0.120	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_6153	CPP	0.124	0.000	0.124	0.000	0.000
A-42-00	A4200__-IM_-L-05_C7	HIPK_6154	CPP	0.096	0.067	0.000	0.000	0.029
A-42-00	A4200__-MM_-L-07_C5	HIPK_6155	CPP	0.290	0.000	0.288	0.000	0.002
A-42-00	A4200__-MM_-L-07_C4	HIPK_6156	CPP	0.038	0.036	0.000	0.000	0.002
A-42-00	A4200__-MM_-L-07_C6	HIPK_6157	CPP	0.273	0.256	0.000	0.000	0.017
A-42-00	A4200__-MM_-L-07_C6	HIPK_6158	CPP	0.321	0.026	0.090	0.000	0.205
A-42-00	A4200__-MM_-L-07_C9	HIPK_6159	CPP	0.140	0.051	0.000	0.000	0.089
A-42-00	A4200__-MM_-L-07_C9	HIPK_6160	CPP	0.057	0.057	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C15	HIPK_6161	CPP	0.407	0.390	0.000	0.000	0.017
A-42-00	A4200__-MM_-L-07_C2	HIPK_6162	CPP	0.060	0.040	0.000	0.000	0.020
A-42-00	A4200__-MM_-L-07_C3	HIPK_6163	CPP	0.288	0.280	0.000	0.000	0.008
A-42-00	A4200__-MM_-L-07_C2	HIPK_6164	CPP	0.148	0.145	0.000	0.000	0.003
A-42-00	A4200__-MM_-L-07_C14	HIPK_6165	CPP	0.206	0.000	0.206	0.000	0.000
A-42-00	A4200__-MM_-L-07_C17	HIPK_6166	CPP	0.096	0.000	0.024	0.000	0.072
A-42-00	A4200__-MM_-L-07_C12	HIPK_6167	CPP	0.317	0.261	0.000	0.000	0.056
A-42-00	A4200__-MM_-L-07_C12	HIPK_6168	CPP	0.061	0.003	0.000	0.000	0.058
A-42-00	A4200__-MM_-L-07_C12	HIPK_6169	CPP	0.224	0.000	0.126	0.000	0.098
A-42-00	A4200__-MM_-L-07_C12	HIPK_6170	CPP	0.672	0.000	0.672	0.000	0.000
A-42-00	A4200__-MM_-L-07_C12	HIPK_6171	CPP	0.093	0.060	0.000	0.000	0.033
A-42-00	A4200__-MM_-L-07_C12	HIPK_6172	CPP	0.215	0.214	0.000	0.000	0.001
A-42-00	A4200__-MM_-L-07_C13	HIPK_6173	CPP	0.221	0.197	0.000	0.000	0.024
A-42-00	A4200__-MM_-L-07_C13	HIPK_6174	CPP	0.146	0.123	0.000	0.000	0.023
A-42-00	A4200__-MM_-L-04_C1	HIPK_6175	CPP	0.763	0.325	0.000	0.000	0.438

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-04_C1	HIPK_6176	CPP	0.088	0.065	0.000	0.000	0.023
A-42-00	A4200__-POC-L-02_C5	HIPK_6177	CPP	0.058	0.033	0.000	0.000	0.025
A-42-00	A4200__-POC-L-01_C3	HIPK_6178	CPP	0.213	0.213	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6179	CPP	0.358	0.058	0.000	0.000	0.300
A-42-00	A4200__-POC-L-01_C3	HIPK_6180	CPP	0.168	0.077	0.000	0.000	0.091
A-42-00	A4200__-MM_-L-04_C16	HIPK_6181	CPP	4.542	0.005	0.005	0.000	4.532
A-42-00	A4200__-POC-L-01_C3	HIPK_6182	CPP	0.204	0.003	0.000	0.000	0.201
A-42-00	A4200__-POC-L-01_C3	HIPK_6183	CPP	0.146	0.000	0.146	0.000	0.000
A-42-00	A4200__-MM_-L-07_C2	HIPK_6184	CPP	0.044	0.002	0.000	0.000	0.042
A-42-00	A4200__-MM_-L-07_C4	HIPK_6185	CPP	0.038	0.000	0.032	0.000	0.006
A-42-00	A4200__-MM_-L-07_C10	HIPK_6186	CPP	0.157	0.000	0.157	0.000	0.000
A-42-00	A4200__-MM_-L-07_C15	HIPK_6187	CPP	0.402	0.011	0.006	0.000	0.385
A-42-00	A4200__-POC-L-02_C2	HIPK_6188	CPP	0.401	0.000	0.401	0.000	0.000
A-42-00	A4200__-POC-L-02_C2	HIPK_6189	CPP	0.430	0.000	0.430	0.000	0.000
A-42-00	A4200__-POC-L-02_C2	HIPK_6190	CPP	0.353	0.000	0.353	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6191	CPP	1.365	0.000	1.365	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6192	CPP	0.443	0.000	0.420	0.000	0.023
A-42-00	A4200__-POC-L-02_C3	HIPK_6193	CPP	0.554	0.000	0.554	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6194	CPP	2.703	0.000	2.703	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6195	CPP	0.273	0.000	0.273	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6196	CPP	1.398	0.000	1.390	0.000	0.008
A-42-00	A4200__-POC-L-02_C3	HIPK_6197	CPP	0.365	0.000	0.348	0.000	0.017
A-42-00	A4200__-POC-L-02_C3	HIPK_6198	CPP	0.752	0.000	0.731	0.000	0.021
A-42-00	A4200__-POC-L-02_C3	HIPK_6199	CPP	0.354	0.000	0.354	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6200	CPP	0.094	0.000	0.094	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_6201	CPP	0.184	0.000	0.183	0.000	0.001
A-42-00	A4200__-MM_-L-07_C2	HIPK_6202	CPP	0.146	0.132	0.000	0.000	0.014
A-42-00	A4200__-MM_-L-04_C15	HIPK_6203	CPP	0.097	0.019	0.000	0.000	0.078
A-42-00	A4200__-MM_-L-07_C3	HIPK_6204	CPP	0.172	0.172	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C12	HIPK_6205	CPP	0.063	0.060	0.000	0.000	0.003

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-07_C12	HIPK_6206	CPP	0.061	0.022	0.000	0.000	0.039
A-42-00	A4200__-MM_-L-07_C9	HIPK_6207	CPP	0.068	0.065	0.000	0.000	0.003
A-42-00	A4200__-MM_-L-07_C9	HIPK_6208	CPP	0.101	0.068	0.000	0.000	0.033
A-42-02	INT_A42_C1	HIPK_6209	CPP	0.154	0.000	0.154	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_6210	CPP	0.314	0.000	0.308	0.000	0.006
A-41-00	HR001_C2	HIPK_7001	GR	0.133	0.000	0.133	0.000	0.000
A-41-00	HR002_C1	HIPK_7002	GR	0.150	0.150	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7003	GR	0.127	0.127	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7004	GR	0.218	0.000	0.218	0.000	0.000
A-41-00	HR002_C1	HIPK_7005	GR	0.155	0.155	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7006	GR	0.147	0.137	0.000	0.000	0.010
A-41-00	HR001_C2	HIPK_7007	GR	0.116	0.000	0.115	0.000	0.001
A-41-00	HR002_C1	HIPK_7008	GR	0.318	0.214	0.104	0.000	0.000
A-41-00	HR002_C1	HIPK_7009	GR	0.253	0.253	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7010	GR	0.151	0.151	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7011	GR	0.153	0.153	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7012	GR	0.161	0.000	0.161	0.000	0.000
A-41-00	HR002_C1	HIPK_7013	GR	0.509	0.000	0.269	0.000	0.240
A-41-00	HR002_C1	HIPK_7014	GR	0.115	0.115	0.000	0.000	0.000
A-41-00	HR001_C2	HIPK_7015	GR	0.151	0.151	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7016	GR	0.185	0.000	0.031	0.000	0.154
A-41-00	HR002_C1	HIPK_7017	GR	0.296	0.296	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7018	GR	0.132	0.132	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7019	GR	0.152	0.152	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7020	GR	0.153	0.153	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7021	GR	0.238	0.000	0.238	0.000	0.000
A-41-00	HR002_C1	HIPK_7022	GR	1.636	0.000	1.634	0.000	0.002
A-41-00	HRZOO_C1	HIPK_7023	GR	0.161	0.000	0.161	0.000	0.000
A-41-00	HR001_C2	HIPK_7024	GR	0.174	0.064	0.000	0.000	0.110
A-41-00	HR002_C1	HIPK_7025	GR	0.157	0.157	0.000	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-41-00	HR002_C1	HIPK_7026	GR	0.150	0.150	0.000	0.000	0.000
A-41-00	HR002_C1	HIPK_7027	GR	0.476	0.476	0.000	0.000	0.000
A-37-00	INT_A37_C1	HIPK_7028	GR	0.646	0.000	0.631	0.015	0.000
A-36-00	INT_A36_C1	HIPK_7029	GR	0.926	0.910	0.000	0.000	0.016
A-41-00	HR001_C2	HIPK_7030	GR	0.131	0.000	0.123	0.000	0.008
A-41-00	HR002_C1	HIPK_7031	GR	0.312	0.306	0.000	0.000	0.006
A-41-00	HR002_C1	HIPK_7032	GR	0.138	0.137	0.000	0.000	0.001
A-36-00	INT_A36_C1	HIPK_7033	GR	0.211	0.020	0.000	0.000	0.191
A-41-00	HR002_C1	HIPK_7034	GR	0.270	0.268	0.000	0.000	0.002
A-42-00	PennHills_A-42	HIPK_7035	GR	1.359	0.012	1.347	0.000	0.000
A-42-00	PennHills_A-42	HIPK_7036	GR	0.320	0.055	0.055	0.000	0.210
A-42-00	PennHills_A-42	HIPK_7037	GR	0.209	0.183	0.000	0.000	0.026
A-42-00	PennHills_A-42	HIPK_7038	GR	0.388	0.320	0.000	0.000	0.068
A-42-00	PennHills_A-42	HIPK_7039	GR	0.777	0.772	0.000	0.000	0.005
A-42-00	PennHills_A-42	HIPK_7040	GR	0.342	0.342	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7041	GR	0.131	0.126	0.000	0.000	0.005
A-42-00	A4200__-MM_-L-04_C17	HIPK_7042	GR	0.130	0.000	0.130	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7043	GR	0.359	0.000	0.359	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7044	GR	0.180	0.000	0.180	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7045	GR	0.573	0.000	0.573	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7046	GR	0.669	0.000	0.669	0.000	0.000
A-42-00	A4200__-POC-L-02_C2	HIPK_7047	GR	0.177	0.000	0.177	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7048	GR	0.570	0.000	0.570	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7049	GR	1.243	0.000	1.243	0.000	0.000
A-42-00	A4200__-POC-L-02_C2	HIPK_7050	GR	0.846	0.000	0.846	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7051	GR	2.603	2.600	0.000	0.000	0.003
A-42-00	A4200__-POC-L-01_C4	HIPK_7052	GR	0.116	0.108	0.000	0.000	0.008
A-42-00	A4200__-POC-L-01_C3	HIPK_7053	GR	0.464	0.454	0.000	0.009	0.001
A-42-00	A4200__-MM_-L-04_C16	HIPK_7054	GR	0.814	0.210	0.000	0.000	0.604
A-42-00	A4200__-POC-L-01_C3	HIPK_7055	GR	1.292	0.042	0.000	0.000	1.250

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-04_C10	HIPK_7056	GR	0.186	0.000	0.000	0.000	0.186
A-42-00	A4200__-MM_-L-07_C12	HIPK_7057	GR	0.116	0.115	0.001	0.000	0.000
A-42-00	A4200__-MM_-L-07_C15	HIPK_7058	GR	0.129	0.008	0.112	0.000	0.009
A-42-00	A4200__-MM_-L-07_C15	HIPK_7059	GR	1.377	0.685	0.000	0.000	0.692
A-42-00	A4200__-MM_-L-07_C12	HIPK_7060	GR	0.133	0.112	0.000	0.000	0.021
A-42-00	A4200__-POC-L-02_C2	HIPK_7061	GR	0.610	0.000	0.610	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7062	GR	0.130	0.006	0.000	0.000	0.124
A-42-00	A4200__-MM_-L-04_C15	HIPK_7063	GR	0.206	0.015	0.187	0.000	0.004
A-42-00	A4200__-MM_-L-04_C16	HIPK_7064	GR	0.126	0.125	0.000	0.000	0.001
A-42-00	A4200__-POC-L-02_C3	HIPK_7065	GR	1.133	0.000	1.110	0.000	0.023
A-42-00	A4200__-POC-L-02_C3	HIPK_7066	GR	0.746	0.000	0.746	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7067	GR	0.132	0.000	0.132	0.000	0.000
A-42-00	A4200__-POC-L-02_C2	HIPK_7068	GR	0.232	0.000	0.232	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7069	GR	0.445	0.000	0.445	0.000	0.000
A-42-00	A4200__-MM_-L-07_C5	HIPK_7070	GR	0.351	0.324	0.000	0.000	0.027
A-42-00	A4200__-IM_-L-05_C6	HIPK_7071	GR	0.153	0.002	0.150	0.000	0.001
A-42-00	A4200__-IM_-L-05_C8	HIPK_7072	GR	0.807	0.000	0.807	0.000	0.000
A-42-00	A4200__-MM_-L-07_C6	HIPK_7073	GR	0.184	0.063	0.000	0.000	0.121
A-42-00	A4200__-MM_-L-07_C1	HIPK_7074	GR	0.917	0.000	0.917	0.000	0.000
A-42-00	A4200__-MM_-L-04_C11	HIPK_7075	GR	0.121	0.000	0.121	0.000	0.000
A-42-00	A4200__-POC-L-02_C4	HIPK_7076	GR	0.456	0.449	0.000	0.000	0.007
A-42-00	A4200__-POC-L-02_C3	HIPK_7077	GR	0.644	0.000	0.644	0.000	0.000
A-42-00	A4200__-IM_-L-05_C8	HIPK_7078	GR	0.119	0.119	0.000	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7079	GR	0.152	0.000	0.152	0.000	0.000
A-42-00	A4200__-MM_-L-07_C6	HIPK_7080	GR	0.145	0.142	0.000	0.000	0.003
A-42-00	A4200__-POC-L-02_C3	HIPK_7081	GR	0.624	0.000	0.624	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_7082	GR	0.875	0.875	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C1	HIPK_7083	GR	0.127	0.069	0.000	0.000	0.058
A-42-00	A4200__-MM_-L-04_C10	HIPK_7084	GR	0.444	0.444	0.000	0.000	0.000
A-42-00	A4200__-POC-L-02_C3	HIPK_7085	GR	0.267	0.267	0.000	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-POC-L-02_C2	HIPK_7086	GR	2.451	0.000	2.451	0.000	0.000
A-42-00	A4200__-POC-L-01_C1	HIPK_7087	GR	0.207	0.000	0.195	0.000	0.012
A-42-00	A4200__-MM_-L-07_C1	HIPK_7088	GR	0.152	0.152	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C12	HIPK_7089	GR	0.196	0.115	0.000	0.000	0.081
A-42-00	A4200__-MM_-L-07_C4	HIPK_7090	GR	0.214	0.075	0.000	0.000	0.139
A-42-00	A4200__-MM_-L-07_C9	HIPK_7091	GR	0.119	0.027	0.000	0.000	0.092
A-42-00	A4200__-POC-L-01_C1	HIPK_7092	GR	0.159	0.135	0.000	0.000	0.024
A-42-00	A4200__-MM_-L-04_C11	HIPK_7093	GR	0.392	0.000	0.392	0.000	0.000
A-42-00	A4200__-MM_-L-07_C2	HIPK_7094	GR	0.229	0.000	0.226	0.000	0.003
A-42-00	A4200__-MM_-L-07_C15	HIPK_7095	GR	0.117	0.067	0.000	0.000	0.050
A-42-00	A4200__-IM_-L-05_C6	HIPK_7096	GR	0.173	0.001	0.022	0.000	0.150
A-42-00	A4200__-MM_-L-04_C10	HIPK_7097	GR	0.218	0.000	0.218	0.000	0.000
A-42-00	A4200__-IM_-L-05_C7	HIPK_7098	GR	0.152	0.001	0.000	0.000	0.151
A-42-00	A4200__-MM_-L-07_C9	HIPK_7099	GR	0.159	0.146	0.000	0.000	0.013
A-42-00	A4200__-MM_-L-07_C15	HIPK_7100	GR	0.119	0.000	0.119	0.000	0.000
A-42-00	A4200__-IM_-L-05_C7	HIPK_7101	GR	0.385	0.383	0.000	0.000	0.002
A-42-00	A4200__-MM_-L-07_C17	HIPK_7102	GR	0.167	0.002	0.024	0.000	0.141
A-42-00	A4200__-IM_-L-05_C6	HIPK_7103	GR	0.334	0.000	0.332	0.000	0.002
A-42-00	A4200__-MM_-L-07_C2	HIPK_7104	GR	0.142	0.080	0.000	0.000	0.062
A-42-00	A4200__-MM_-L-07_C12	HIPK_7105	GR	0.354	0.340	0.013	0.000	0.001
A-42-00	A4200__-IM_-L-05_C2	HIPK_7106	GR	0.338	0.338	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C15	HIPK_7107	GR	0.555	0.000	0.552	0.000	0.003
A-42-00	A4200__-MM_-L-07_C2	HIPK_7108	GR	0.231	0.000	0.229	0.000	0.002
A-42-00	A4200__-IM_-L-05_C7	HIPK_7109	GR	0.368	0.131	0.000	0.000	0.237
A-42-00	A4200__-IM_-L-05_C7	HIPK_7110	GR	0.143	0.067	0.000	0.000	0.076
A-42-00	A4200__-POC-L-01_C3	HIPK_7111	GR	0.362	0.000	0.362	0.000	0.000
A-42-00	A4200__-IM_-L-05_C7	HIPK_7112	GR	0.213	0.000	0.162	0.000	0.051
A-42-00	A4200__-POC-L-01_C5	HIPK_7113	GR	0.191	0.169	0.000	0.000	0.022
A-42-00	A4200__-POC-L-01_C2	HIPK_7114	GR	0.236	0.000	0.236	0.000	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_7115	GR	0.116	0.116	0.000	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-07_C12	HIPK_7116	GR	0.272	0.000	0.262	0.000	0.010
A-42-00	A4200__-MM_-L-07_C4	HIPK_7117	GR	1.132	0.000	1.132	0.000	0.000
A-42-00	A4200__-IM_-L-05_C7	HIPK_7118	GR	0.316	0.000	0.310	0.000	0.006
A-42-00	A4200__-POC-L-01_C5	HIPK_7119	GR	0.137	0.130	0.000	0.000	0.007
A-42-00	A4200__-MM_-L-07_C2	HIPK_7120	GR	0.183	0.179	0.000	0.000	0.004
A-42-00	A4200__-IM_-L-05_C1	HIPK_7121	GR	0.116	0.116	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_7122	GR	0.144	0.001	0.000	0.000	0.143
A-42-00	A4200__-MM_-L-07_C18	HIPK_7123	GR	0.513	0.004	0.000	0.000	0.509
A-42-00	A4200__-POC-L-01_C3	HIPK_7124	GR	0.254	0.254	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C10	HIPK_7125	GR	0.184	0.003	0.000	0.000	0.181
A-42-00	A4200__-IM_-L-05_C8	HIPK_7126	GR	2.454	2.437	0.016	0.000	0.001
A-42-00	A4200__-MM_-L-07_C4	HIPK_7127	GR	0.180	0.177	0.000	0.000	0.003
A-42-00	A4200__-MM_-L-07_C1	HIPK_7128	GR	0.495	0.479	0.000	0.000	0.016
A-42-00	A4200__-MM_-L-07_C6	HIPK_7129	GR	0.869	0.869	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7130	GR	0.120	0.000	0.039	0.000	0.081
A-42-00	A4200__-POC-L-01_C3	HIPK_7131	GR	0.122	0.000	0.122	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7132	GR	0.285	0.000	0.285	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_7133	GR	0.245	0.007	0.238	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7134	GR	0.133	0.000	0.084	0.000	0.049
A-42-00	A4200__-MM_-L-07_C6	HIPK_7135	GR	0.177	0.002	0.000	0.000	0.175
A-42-00	A4200__-MM_-L-07_C18	HIPK_7136	GR	0.138	0.138	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C18	HIPK_7137	GR	0.200	0.010	0.000	0.000	0.190
A-42-00	A4200__-MM_-L-04_C1	HIPK_7138	GR	0.200	0.195	0.000	0.000	0.005
A-42-00	A4200__-MM_-L-07_C4	HIPK_7139	GR	0.164	0.101	0.000	0.000	0.063
A-42-00	A4200__-MM_-L-07_C6	HIPK_7140	GR	0.288	0.000	0.000	0.000	0.288
A-42-00	A4200__-MM_-L-07_C1	HIPK_7141	GR	0.211	0.198	0.000	0.000	0.013
A-42-00	A4200__-MM_-L-07_C1	HIPK_7142	GR	1.212	0.555	0.000	0.000	0.657
A-42-00	A4200__-MM_-L-07_C1	HIPK_7143	GR	0.256	0.026	0.000	0.000	0.230
A-42-00	A4200__-MM_-L-07_C1	HIPK_7144	GR	1.180	0.805	0.000	0.000	0.375
A-42-00	A4200__-MM_-L-07_C1	HIPK_7145	GR	1.504	1.504	0.000	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-03_C2	HIPK_7146	GR	0.269	0.183	0.000	0.000	0.086
A-42-00	A4200__-MM_-L-07_C1	HIPK_7147	GR	0.848	0.847	0.001	0.000	0.000
A-42-00	A4200__-IM_-L-05_C1	HIPK_7148	GR	1.270	1.257	0.000	0.000	0.013
A-42-00	A4200__-MM_-L-07_C1	HIPK_7149	GR	0.267	0.267	0.000	0.000	0.000
A-42-00	A4200__-IM_-L-05_C3	HIPK_7150	GR	0.194	0.194	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_7151	GR	0.169	0.000	0.169	0.000	0.000
A-42-00	A4200__-MM_-L-04_C1	HIPK_7152	GR	0.365	0.361	0.000	0.000	0.004
A-42-00	A4200__-MM_-L-04_C3	HIPK_7153	GR	0.151	0.001	0.000	0.000	0.150
A-42-00	A4200__-MM_-L-03_C2	HIPK_7154	GR	0.247	0.247	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C1	HIPK_7155	GR	1.763	0.039	0.000	0.000	1.724
A-42-00	A4200__-MM_-L-07_C1	HIPK_7156	GR	0.123	0.123	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_7157	GR	0.131	0.131	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7158	GR	0.248	0.000	0.248	0.000	0.000
A-42-00	A4200__-MM_-L-04_C1	HIPK_7159	GR	0.173	0.171	0.000	0.000	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_7160	GR	0.123	0.000	0.006	0.000	0.117
A-42-00	A4200__-POC-L-01_C5	HIPK_7161	GR	0.119	0.096	0.000	0.000	0.023
A-42-00	A4200__-POC-L-01_C3	HIPK_7162	GR	0.140	0.000	0.044	0.000	0.096
A-42-00	A4200__-MM_-L-04_C17	HIPK_7163	GR	0.131	0.130	0.000	0.000	0.001
A-42-00	A4200__-POC-L-01_C3	HIPK_7164	GR	0.213	0.000	0.213	0.000	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_7165	GR	0.195	0.193	0.000	0.000	0.002
A-42-00	A4200__-MM_-L-04_C15	HIPK_7166	GR	0.224	0.224	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7167	GR	0.326	0.324	0.000	0.000	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_7168	GR	0.512	0.000	0.000	0.512	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7169	GR	0.234	0.054	0.000	0.000	0.180
A-42-00	A4200__-MM_-L-04_C15	HIPK_7170	GR	0.464	0.000	0.342	0.000	0.122
A-42-00	A4200__-MM_-L-04_C15	HIPK_7171	GR	0.342	0.342	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7172	GR	0.358	0.010	0.000	0.012	0.336
A-42-00	A4200__-MM_-L-04_C16	HIPK_7173	GR	0.272	0.026	0.000	0.000	0.246
A-42-00	A4200__-MM_-L-04_C16	HIPK_7174	GR	0.199	0.055	0.000	0.000	0.144
A-42-00	A4200__-MM_-L-04_C15	HIPK_7175	GR	0.228	0.216	0.000	0.000	0.012

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-POC-L-01_C3	HIPK_7176	GR	0.440	0.439	0.001	0.000	0.000
A-42-00	A4200__-MM_-L-04_C17	HIPK_7177	GR	0.950	0.950	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C15	HIPK_7178	GR	0.134	0.132	0.000	0.000	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_7179	GR	2.052	0.408	0.000	0.000	1.644
A-42-00	A4200__-MM_-L-04_C16	HIPK_7180	GR	1.037	1.034	0.000	0.000	0.003
A-42-00	A4200__-POC-L-01_C3	HIPK_7181	GR	0.931	0.000	0.106	0.000	0.825
A-42-00	A4200__-IM_-L-05_C1	HIPK_7182	GR	0.188	0.000	0.000	0.000	0.188
A-42-00	A4200__-POC-L-01_C3	HIPK_7183	GR	0.667	0.000	0.658	0.000	0.009
A-42-00	A4200__-POC-L-01_C3	HIPK_7184	GR	0.313	0.142	0.000	0.000	0.171
A-42-00	A4200__-MM_-L-07_C19	HIPK_7185	GR	0.283	0.265	0.000	0.000	0.018
A-42-00	A4200__-POC-L-01_C3	HIPK_7186	GR	0.808	0.335	0.000	0.000	0.473
A-42-00	A4200__-MM_-L-04_C16	HIPK_7187	GR	0.747	0.747	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C17	HIPK_7188	GR	0.241	0.156	0.000	0.000	0.085
A-42-00	A4200__-IM_-L-05_C4	HIPK_7189	GR	0.148	0.137	0.000	0.000	0.011
A-42-00	A4200__-POC-L-01_C3	HIPK_7190	GR	3.139	0.000	3.139	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7191	GR	0.824	0.060	0.000	0.000	0.764
A-42-00	A4200__-POC-L-01_C3	HIPK_7192	GR	0.269	0.001	0.000	0.266	0.002
A-42-00	A4200__-MM_-L-04_C16	HIPK_7193	GR	0.139	0.019	0.119	0.000	0.001
A-42-00	A4200__-MM_-L-04_C16	HIPK_7194	GR	0.167	0.088	0.000	0.000	0.079
A-42-00	A4200__-POC-L-01_C3	HIPK_7195	GR	0.124	0.124	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7196	GR	0.158	0.152	0.000	0.000	0.006
A-42-00	A4200__-MM_-L-04_C16	HIPK_7197	GR	0.121	0.000	0.000	0.000	0.121
A-42-00	A4200__-IM_-L-05_C1	HIPK_7198	GR	0.241	0.000	0.241	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7199	GR	0.149	0.008	0.000	0.000	0.141
A-42-00	A4200__-IM_-L-05_C3	HIPK_7200	GR	0.201	0.147	0.053	0.000	0.001
A-42-00	A4200__-MM_-L-06_C1	HIPK_7201	GR	1.864	0.000	1.864	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7202	GR	0.369	0.000	0.369	0.000	0.000
A-42-00	A4200__-IM_-L-05_C3	HIPK_7203	GR	1.828	0.003	0.000	0.000	1.825
A-42-00	A4200__-MM_-L-04_C15	HIPK_7204	GR	0.895	0.242	0.000	0.000	0.653
A-42-00	A4200__-POC-L-01_C3	HIPK_7205	GR	0.460	0.460	0.000	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-04_C17	HIPK_7206	GR	2.358	2.358	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7207	GR	2.721	0.054	0.734	0.000	1.933
A-42-00	A4200__-MM_-L-04_C11	HIPK_7208	GR	0.126	0.114	0.000	0.000	0.012
A-42-00	A4200__-IM_-L-05_C12	HIPK_7209	GR	0.259	0.009	0.215	0.000	0.035
A-42-00	A4200__-POC-L-01_C3	HIPK_7210	GR	0.341	0.341	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7211	GR	4.175	0.000	4.076	0.000	0.099
A-42-00	A4200__-MM_-L-04_C16	HIPK_7212	GR	0.377	0.280	0.000	0.000	0.097
A-42-00	A4200__-POC-L-01_C3	HIPK_7213	GR	0.180	0.180	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7214	GR	0.863	0.856	0.000	0.000	0.007
A-42-00	A4200__-MM_-L-04_C17	HIPK_7215	GR	0.126	0.002	0.000	0.000	0.124
A-42-00	A4200__-MM_-L-07_C13	HIPK_7216	GR	0.494	0.222	0.272	0.000	0.000
A-42-00	A4200__-MM_-L-07_C13	HIPK_7217	GR	0.155	0.155	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-07_C3	HIPK_7218	GR	0.286	0.286	0.000	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7219	GR	3.395	3.340	0.000	0.000	0.055
A-42-00	A4200__-POC-L-01_C3	HIPK_7220	GR	0.810	0.023	0.000	0.000	0.787
A-42-00	A4200__-POC-L-01_C3	HIPK_7221	GR	2.997	0.194	0.000	0.000	2.803
A-42-00	A4200__-POC-L-01_C3	HIPK_7222	GR	0.246	0.237	0.000	0.000	0.009
A-42-00	A4200__-MM_-L-04_C9	HIPK_7223	GR	0.190	0.190	0.000	0.000	0.000
A-42-00	A4200__-IM_-L-05_C8	HIPK_7224	GR	3.093	0.000	3.093	0.000	0.000
A-42-00	A4200__-POC-L-01_C4	HIPK_7225	GR	0.270	0.270	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-04_C12	HIPK_7226	GR	0.182	0.000	0.033	0.000	0.149
A-42-00	A4200__-POC-L-01_C3	HIPK_7227	GR	0.157	0.000	0.157	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7228	GR	0.425	0.002	0.000	0.000	0.423
A-42-00	A4200__-MM_-L-07_C12	HIPK_7229	GR	0.298	0.000	0.298	0.000	0.000
A-42-00	A4200__-MM_-L-04_C16	HIPK_7230	GR	0.369	0.367	0.000	0.000	0.002
A-42-00	A4200__-MM_-L-07_C2	HIPK_7231	GR	0.482	0.000	0.031	0.000	0.451
A-42-00	PennHills_A-42	HIPK_7232	GR	0.119	0.075	0.000	0.000	0.044
A-42-00	PennHills_A-42	HIPK_7233	GR	0.126	0.126	0.000	0.000	0.000
A-42-00	PennHills_A-42	HIPK_7234	GR	0.319	0.056	0.056	0.000	0.207
A-42-00	PennHills_A-42	HIPK_7235	GR	0.159	0.000	0.159	0.000	0.000

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	PennHills_A-42	HIPK_7236	GR	0.140	0.000	0.140	0.000	0.000
A-42-00	A4200__-POC-L-01_C5	HIPK_7237	GR	0.136	0.003	0.000	0.000	0.133
A-42-00	A4200__-MM_-L-03_C2	HIPK_7238	GR	0.053	0.053	0.000	0.000	0.000
A-42-00	A4200__-MM_-L-03_C2	HIPK_7239	GR	0.157	0.149	0.000	0.000	0.008
A-42-00	A4200__-POC-L-01_C3	HIPK_7240	GR	0.537	0.409	0.000	0.000	0.128
A-42-00	A4200__-POC-L-01_C3	HIPK_7241	GR	0.120	0.118	0.000	0.000	0.002
A-42-00	A4200__-POC-L-01_C3	HIPK_7242	GR	0.202	0.000	0.195	0.000	0.007
A-42-00	A4200__-POC-L-01_C3	HIPK_7243	GR	0.889	0.000	0.889	0.000	0.000
A-42-00	A4200__-POC-L-01_C3	HIPK_7244	GR	1.483	0.000	1.483	0.000	0.000
A-42-00	A4200__-MM_-L-07_C3	HIPK_7245	GR	0.137	0.130	0.000	0.000	0.007
A-42-00	A4200__-MM_-L-07_C3	HIPK_7246	GR	0.115	0.110	0.000	0.000	0.005
A-42-00	A4200__-MM_-L-07_C18	HIPK_7247	GR	0.715	0.004	0.000	0.000	0.711
A-42-00	A4200__-MM_-L-07_C18	HIPK_7248	GR	1.307	0.210	0.000	0.000	1.097
A-36-00	INT_A36_C1	HIPK_8001	SRPP	0.512	0.000	0.000	0.000	0.512
A-40-00	INT_A40_C1	HIPK_8002	SRPP	0.449	0.000	0.000	0.000	0.449
A-37-00	A37002_C1	HIPK_8003	SRPP	0.450	0.000	0.000	0.000	0.450
A-41-00	HR001_C2	HIPK_8004	SRPP	0.499	0.000	0.000	0.000	0.499
A-41-00	A41IN_C1	HIPK_8005	SRPP	0.442	0.000	0.000	0.000	0.442
A-41-00	HR002_C1	HIPK_8006	SRPP	2.477	0.000	0.000	0.000	2.477
A-41-00	HR002_C1	HIPK_8007	SRPP	0.735	0.000	0.000	0.000	0.735
A-41-00	HR002_C1	HIPK_8008	SRPP	0.941	0.000	0.000	0.000	0.941
A-41-00	HR002_C1	HIPK_8009	SRPP	0.377	0.000	0.000	0.000	0.377
A-41-00	HR002_C1	HIPK_8010	SRPP	0.757	0.000	0.000	0.000	0.757
A-41-00	HR002_C1	HIPK_8011	SRPP	0.386	0.000	0.000	0.000	0.386
A-42-00	PennHills_A-42	HIPK_8013	SRPP	0.784	0.000	0.000	0.000	0.784
A-42-00	PennHills_A-42	HIPK_8014	SRPP	0.982	0.000	0.000	0.000	0.982
A-42-00	PennHills_A-42	HIPK_8015	SRPP	0.565	0.000	0.000	0.000	0.565
A-42-00	PennHills_A-42	HIPK_8016	SRPP	0.117	0.000	0.000	0.000	0.117
A-42-00	PennHills_A-42	HIPK_8017	SRPP	0.147	0.000	0.000	0.000	0.147
A-42-00	PennHills_A-42	HIPK_8018	SRPP	0.095	0.000	0.000	0.000	0.095

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-MM_-L-07_C13	HIPK_8019	SRPP	0.160	0.000	0.000	0.000	0.160
A-42-00	PennHills_A-42	HIPK_8020	SRPP	0.287	0.000	0.000	0.000	0.287
A-42-00	PennHills_A-42	HIPK_8021	SRPP	0.137	0.000	0.000	0.000	0.137
A-42-00	A4200__-POC-L-02_C1	HIPK_8022	SRPP	1.023	0.000	0.000	0.000	1.023
A-42-00	A4200__-POC-L-02_C2	HIPK_8023	SRPP	2.234	0.000	0.000	0.000	2.234
A-42-00	A4200__-MM_-L-07_C18	HIPK_8024	SRPP	0.417	0.000	0.000	0.000	0.417
A-42-00	A4200__-MM_-L-04_C5	HIPK_8025	SRPP	0.735	0.000	0.000	0.000	0.735
A-42-00	A4200__-MM_-L-04_C12	HIPK_8026	SRPP	0.496	0.002	0.000	0.000	0.494
A-42-00	A4200__-MM_-L-07_C17	HIPK_8027	SRPP	0.452	0.000	0.000	0.000	0.452
A-42-00	A4200__-MM_-L-07_C17	HIPK_8028	SRPP	0.374	0.000	0.000	0.000	0.374
A-42-00	A4200__-POC-L-02_C3	HIPK_8029	SRPP	1.230	0.000	0.000	0.000	1.230
A-42-00	A4200__-MM_-L-07_C2	HIPK_8030	SRPP	0.605	0.000	0.000	0.000	0.605
A-42-00	A4200__-MM_-L-07_C2	HIPK_8031	SRPP	0.682	0.000	0.000	0.000	0.682
A-42-00	A4200__-MM_-L-07_C2	HIPK_8032	SRPP	0.653	0.000	0.000	0.000	0.653
A-42-00	A4200__-IM_-L-05_C5	HIPK_8033	SRPP	0.513	0.000	0.000	0.000	0.513
A-42-00	A4200__-IM_-L-05_C5	HIPK_8034	SRPP	1.695	0.001	0.000	0.000	1.694
A-42-00	A4200__-POC-L-01_C1	HIPK_8035	SRPP	1.163	0.000	0.000	0.000	1.163
A-42-00	A4200__-MM_-L-04_C10	HIPK_8036	SRPP	0.235	0.000	0.000	0.000	0.235
A-42-00	A4200__-MM_-L-04_C11	HIPK_8037	SRPP	0.396	0.000	0.000	0.000	0.396
A-42-00	A4200__-POC-L-01_C2	HIPK_8038	SRPP	0.264	0.000	0.000	0.000	0.264
A-42-00	A4200__-POC-L-01_C2	HIPK_8039	SRPP	0.906	0.000	0.000	0.000	0.906
A-42-00	A4200__-POC-L-01_C2	HIPK_8040	SRPP	1.551	0.000	0.000	0.000	1.551
A-42-00	A4200__-MM_-L-04_C11	HIPK_8042	SRPP	0.918	0.000	0.000	0.000	0.918
A-42-00	A4200__-POC-L-02_C4	HIPK_8043	SRPP	0.671	0.000	0.001	0.000	0.670
A-42-00	A4200__-MM_-L-04_C3	HIPK_8044	SRPP	0.700	0.000	0.000	0.000	0.700
A-42-00	A4200__-POC-L-01_C2	HIPK_8045	SRPP	1.137	0.000	0.000	0.000	1.137
A-42-00	A4200__-MM_-L-04_C10	HIPK_8046	SRPP	0.226	0.000	0.000	0.000	0.226
A-42-00	A4200__-POC-L-01_C2	HIPK_8047	SRPP	0.368	0.000	0.000	0.000	0.368
A-42-00	A4200__-MM_-L-07_C18	HIPK_8048	SRPP	0.212	0.000	0.000	0.000	0.212
A-42-00	A4200__-MM_-L-07_C17	HIPK_8049	SRPP	0.536	0.000	0.000	0.000	0.536

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-POC-L-02_C5	HIPK_8050	SRPP	1.670	0.000	0.000	0.000	1.670
A-42-00	A4200__-POC-L-01_C3	HIPK_8051	SRPP	0.855	0.000	0.000	0.000	0.855
A-42-00	A4200__-POC-L-01_C3	HIPK_8052	SRPP	2.219	0.003	0.012	0.000	2.204
A-42-00	A4200__-POC-L-01_C5	HIPK_8053	SRPP	1.027	0.000	0.000	0.000	1.027
A-42-00	A4200__-MM_-L-04_C15	HIPK_8054	SRPP	0.197	0.005	0.000	0.000	0.192
A-42-00	A4200__-MM_-L-04_C15	HIPK_8055	SRPP	0.124	0.000	0.000	0.000	0.124
A-42-00	A4200__-POC-L-01_C3	HIPK_8058	SRPP	2.972	0.036	0.000	0.000	2.936
A-42-00	A4200__-POC-L-01_C3	HIPK_8059	SRPP	0.285	0.000	0.000	0.000	0.285
A-42-00	A4200__-POC-L-01_C3	HIPK_8060	SRPP	0.150	0.052	0.032	0.000	0.066
A-42-00	A4200__-POC-L-01_C3	HIPK_8061	SRPP	1.587	0.000	0.000	0.000	1.587
A-42-00	A4200__-POC-L-01_C3	HIPK_8062	SRPP	0.405	0.000	0.000	0.000	0.405
A-42-00	A4200__-POC-L-01_C3	HIPK_8063	SRPP	1.651	0.046	0.006	0.000	1.599
A-42-00	A4200__-POC-L-01_C3	HIPK_8064	SRPP	0.995	0.000	0.005	0.000	0.990
A-42-00	A4200__-POC-L-01_C3	HIPK_8065	SRPP	2.387	0.000	0.000	0.000	2.387
A-42-00	A4200__-POC-L-01_C3	HIPK_8066	SRPP	0.352	0.000	0.000	0.000	0.352
A-42-00	A4200__-POC-L-01_C3	HIPK_8067	SRPP	0.374	0.000	0.000	0.000	0.374
A-42-00	A4200__-POC-L-01_C3	HIPK_8068	SRPP	0.362	0.000	0.000	0.000	0.362
A-42-00	A4200__-POC-L-01_C3	HIPK_8069	SRPP	1.146	0.000	0.000	0.000	1.146
A-42-00	A4200__-MM_-L-04_C17	HIPK_8070	SRPP	0.310	0.000	0.000	0.000	0.310
A-42-00	A4200__-MM_-L-04_C16	HIPK_8071	SRPP	0.683	0.000	0.000	0.000	0.683
A-42-00	A4200__-POC-L-01_C3	HIPK_8072	SRPP	0.826	0.000	0.000	0.000	0.826
A-42-00	A4200__-POC-L-01_C3	HIPK_8073	SRPP	0.758	0.018	0.000	0.000	0.740
A-42-00	A4200__-MM_-L-04_C15	HIPK_8074	SRPP	0.820	0.000	0.000	0.000	0.820
A-42-00	A4200__-MM_-L-04_C15	HIPK_8075	SRPP	1.606	0.000	0.000	0.000	1.606
A-42-00	A4200__-POC-L-01_C3	HIPK_8076	SRPP	1.005	0.000	0.004	0.000	1.001
A-42-00	A4200__-IM_-L-05_C1	HIPK_8077	SRPP	1.448	0.004	0.019	0.000	1.425
A-42-00	A4200__-IM_-L-05_C2	HIPK_8078	SRPP	1.592	0.000	0.000	0.000	1.592
A-42-00	A4200__-IM_-L-05_C3	HIPK_8079	SRPP	1.109	0.000	0.000	0.000	1.109
A-42-00	A4200__-IM_-L-05_C12	HIPK_8080	SRPP	0.600	0.000	0.000	0.000	0.600
A-42-00	A4200__-MM_-L-07_C15	HIPK_8081	SRPP	2.105	0.000	0.000	0.000	2.105

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-IM_-L-05_C4	HIPK_8082	SRPP	0.344	0.000	0.000	0.000	0.344
A-42-00	A4200__-IM_-L-05_C3	HIPK_8083	SRPP	0.299	0.002	0.000	0.000	0.297
A-42-00	A4200__-MM_-L-07_C3	HIPK_8084	SRPP	0.558	0.000	0.000	0.000	0.558
A-42-00	A4200__-IM_-L-05_C6	HIPK_8085	SRPP	0.986	0.000	0.000	0.000	0.986
A-42-00	A4200__-IM_-L-05_C8	HIPK_8086	SRPP	0.507	0.000	0.000	0.000	0.507
A-42-00	A4200__-IM_-L-05_C5	HIPK_8087	SRPP	0.656	0.000	0.000	0.000	0.656
A-42-00	A4200__-POC-L-01_C3	HIPK_8088	SRPP	1.417	0.000	0.000	0.000	1.417
A-42-00	A4200__-MM_-L-04_C8	HIPK_8089	SRPP	0.124	0.000	0.000	0.000	0.124
A-42-00	A4200__-MM_-L-07_C1	HIPK_8090	SRPP	0.814	0.000	0.000	0.000	0.814
A-42-00	A4200__-MM_-L-07_C11	HIPK_8091	SRPP	0.370	0.000	0.000	0.000	0.370
A-42-00	A4200__-IM_-L-05_C3	HIPK_8092	SRPP	0.399	0.000	0.000	0.000	0.399
A-42-00	A4200__-MM_-L-04_C13	HIPK_8093	SRPP	0.620	0.000	0.000	0.000	0.620
A-42-00	A4200__-MM_-L-06_C1	HIPK_8094	SRPP	0.379	0.000	0.000	0.000	0.379
A-42-00	A4200__-IM_-L-05_C2	HIPK_8095	SRPP	0.180	0.000	0.000	0.000	0.180
A-42-00	A4200__-MM_-L-04_C17	HIPK_8096	SRPP	0.195	0.000	0.000	0.000	0.195
A-42-00	A4200__-MM_-L-04_C17	HIPK_8097	SRPP	0.161	0.002	0.000	0.000	0.159
A-42-00	A4200__-MM_-L-04_C17	HIPK_8098	SRPP	0.396	0.000	0.000	0.000	0.396
A-42-00	A4200__-MM_-L-04_C1	HIPK_8099	SRPP	2.257	0.000	0.000	0.000	2.257
A-42-00	A4200__-MM_-L-07_C10	HIPK_8100	SRPP	0.250	0.000	0.000	0.000	0.250
A-42-00	A4200__-MM_-L-07_C14	HIPK_8102	SRPP	0.351	0.001	0.000	0.000	0.350
A-42-00	A4200__-MM_-L-07_C12	HIPK_8104	SRPP	0.418	0.000	0.000	0.000	0.418
A-42-00	A4200__-MM_-L-07_C6	HIPK_8105	SRPP	0.284	0.004	0.000	0.000	0.280
A-42-00	A4200__-POC-L-01_C4	HIPK_8106	SRPP	0.281	0.000	0.000	0.000	0.281
A-42-00	A4200__-MM_-L-07_C10	HIPK_8107	SRPP	0.245	0.000	0.000	0.000	0.245
A-42-00	A4200__-MM_-L-04_C17	HIPK_8109	SRPP	0.652	0.000	0.005	0.000	0.647
A-42-00	A4200__-MM_-L-07_C10	HIPK_8111	SRPP	0.167	0.000	0.000	0.000	0.167
A-42-00	A4200__-MM_-L-04_C4	HIPK_8112	SRPP	0.335	0.000	0.000	0.000	0.335
A-42-00	A4200__-MM_-L-04_C16	HIPK_8113	SRPP	1.858	0.000	0.021	0.000	1.837
A-42-00	A4200__-POC-L-01_C3	HIPK_8114	SRPP	3.605	0.004	0.032	0.000	3.569
A-42-00	A4200__-POC-L-01_C3	HIPK_8115	SRPP	2.268	0.001	0.000	0.000	2.267

ALCOSAN POC	Model Subcatchment	Concept Comm / Inst Project UID	BMP Type	Concept Municipal Project Area (acres)	Taxable (acres)	Exempt (acres)	Provisionally Exempt (acres)	Public ROW (acres)
A-42-00	A4200__-POC-L-01_C3	HIPK_8116	SRPP	0.953	0.000	0.000	0.000	0.953
A-42-00	A4200__-POC-L-01_C3	HIPK_8117	SRPP	1.354	0.000	0.000	0.000	1.354
A-42-00	A4200__-POC-L-01_C3	HIPK_8118	SRPP	0.352	0.000	0.000	0.000	0.352
A-42-00	A4200__-MM_-L-07_C1	HIPK_8119	SRPP	2.155	0.000	0.000	0.000	2.155
A-42-00	A4200__-MM_-L-04_C17	HIPK_8120	SRPP	1.495	0.002	0.004	0.000	1.489



ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor

Special Case
Concept Commercial / Institutional Permeable Pavement Projects
Concept Green Roof Projects


State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 inch = 600 Feet

East

ALCOSAN GSI Project
Highland Park - East (A-36 thru A-42)
Concept Commercial / Institutional,
Green Roof, and Special Case GSI Projects

Path: N:\PROJ\340\036-05 ALCOSAN GSI Project\03 - Task 2.2.1\Figures\HighlandPark_CommInstGR_East.mxd

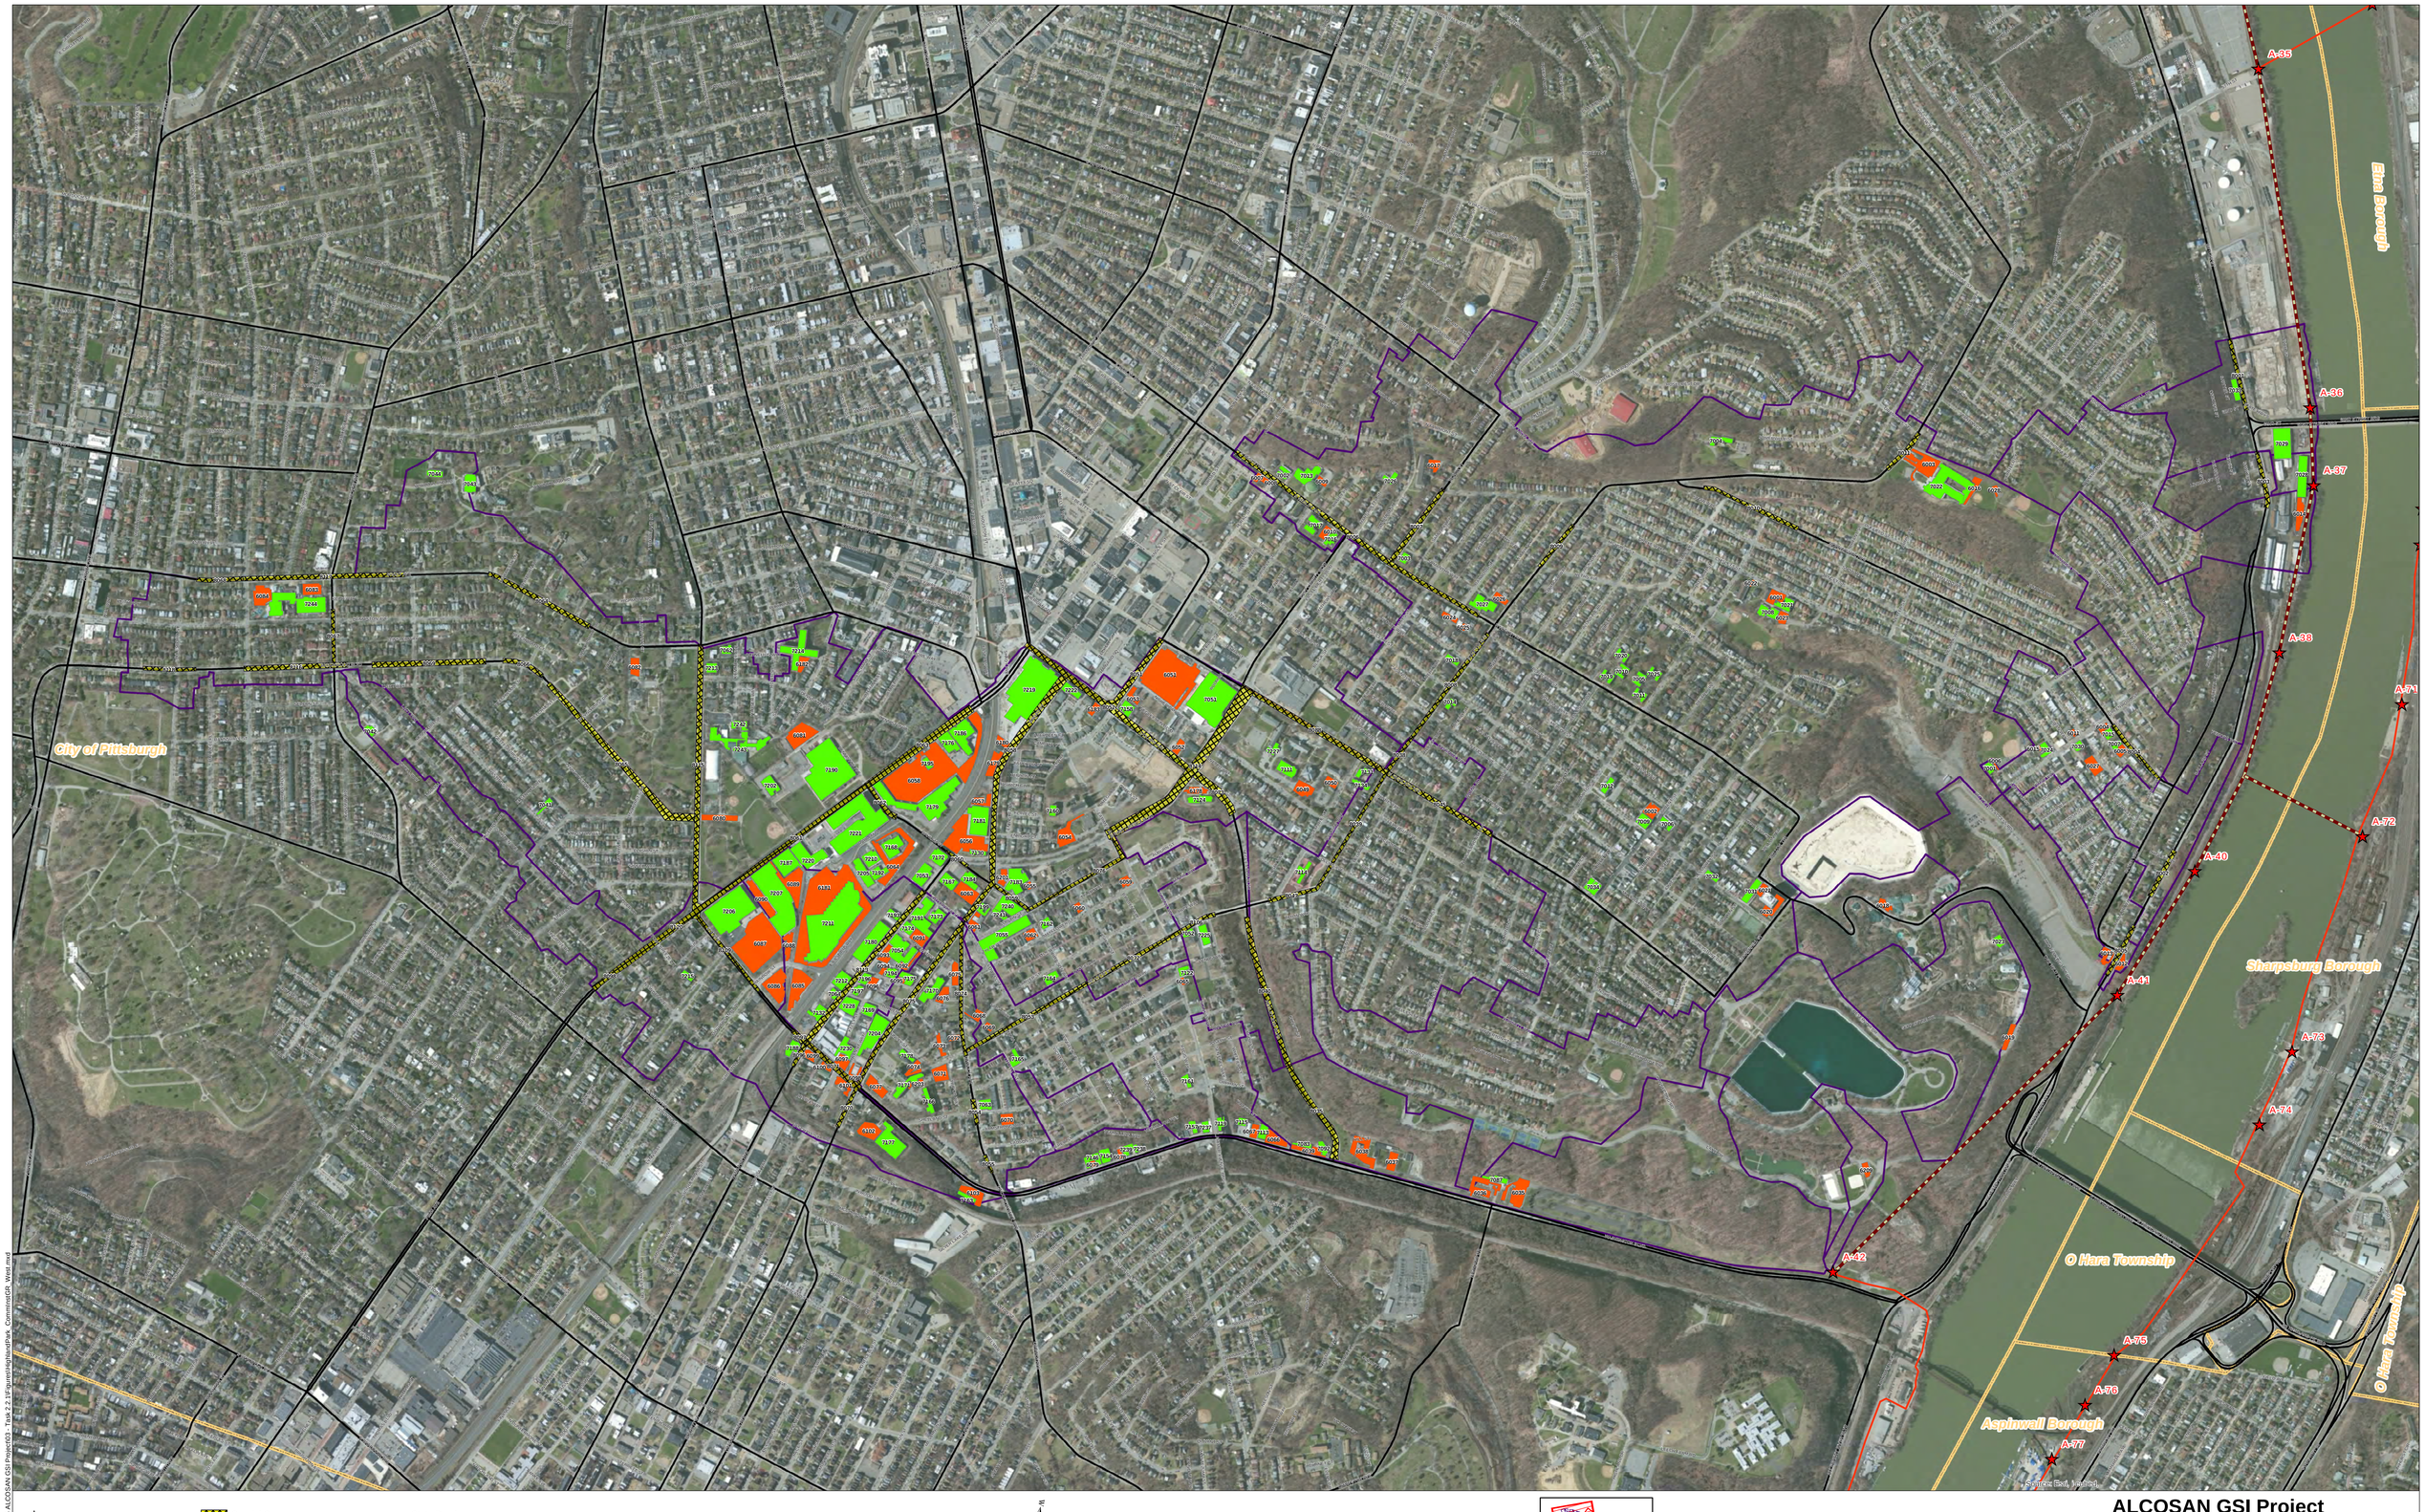

ALCOSAN Structures
ALCOSAN Shallow-Cut Interceptor
ALCOSAN Deep Tunnel Interceptor
Special Case
Concept Commercial / Institutional Permeable Pavement Projects
Concept Green Roof Projects
State Roads
Combined Sewer Subcatchment
Municipal Boundaries

0 300 600 1,200 1,800 2,400
1 Inch = 600 Feet

West

ALCOSAN GSI Project
Highland Park - West (A-36 thru A-42)
Concept Commercial / Institutional,
Green Roof, and Special Case GSI Projects

Path: N:\PROJ\3403\406.05 ALCOSAN GSI Project\03 - Task 2.1\Figures\HighlandPark_CommInstGR_West.mxd